
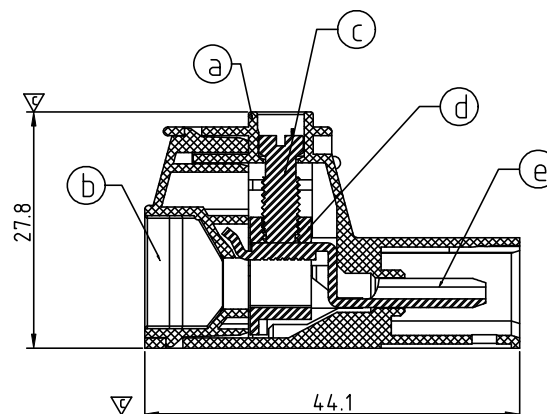
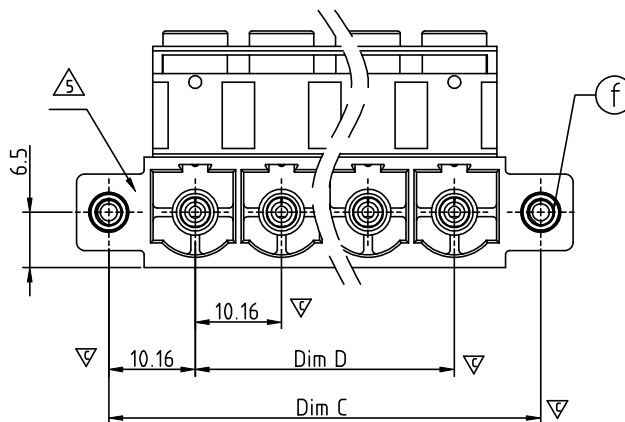
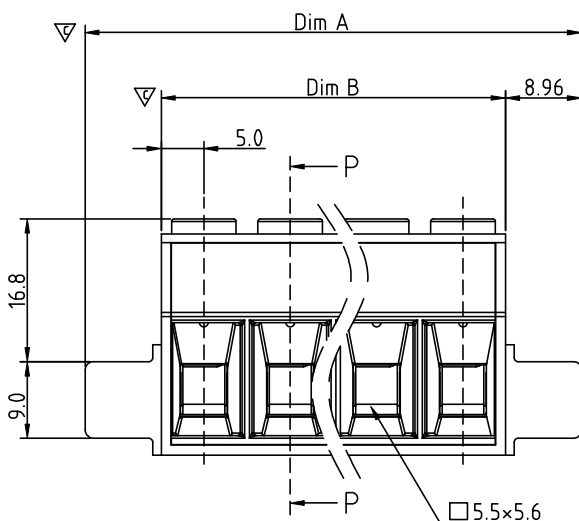


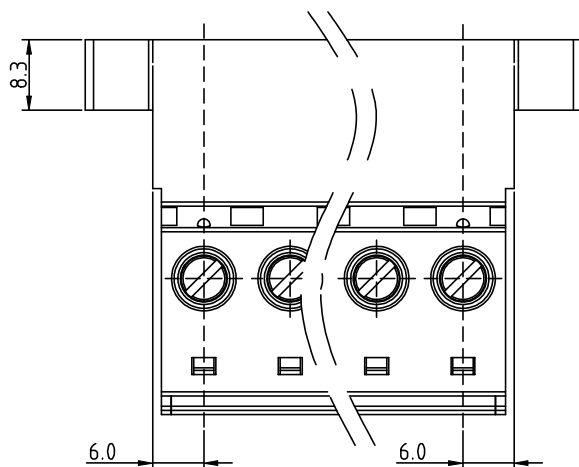

SECTION P-P

N= Number of poles

Dim	Value	Poles	Tolerance
Dim A	$N \times 10.16 + 17.76$	2P-4P	± 0.25
Dim B	$N \times 10.16 - 0.16$	5P-7P	± 0.30
Dim C	$(N-1) \times 10.16 + 20.32$	8P-10P	± 0.35
Dim D	$(N-1) \times 10.16$	11P-12P	± 0.45

SIGN	DATE	DESCRIPTION	APPROVER
△	2010.05.31	Add cULus standard	Jacke
△	2011.07.04	The Tolerance is changed	Aaron
△	2011.07.04	Remove the "cULus" mark	Aaron
△	2011.12.15	Screw is changed from M4 to M4.5	Aaron
△	2012.05.24	Update drawing	Chen Bo

Material

- Item a Terminal body: Thermoplastic (UL94V-0)
- Item b Terminal cover: Thermoplastic (UL94V-0)
- Item c Terminal screw: Steel Zinc plating "-" slot type
- Item d Clamp: Brass, Ni plated
- Item e Male contact pin: Copper Gold plated
- Item f With flange nut: Steel Zinc plating M3

Electrical cULus / IEC

- Voltage rating: 300VAC / 1000VAC
- Current rating: 55A / 76A
- Solid wire: 6-20 / 0.5-16mm²
- Stranded wire: 6-20 / 0.5-16mm²
- Torque: 18 Lb-In / 2.0 N.m
- Screw: M4.5
- Wire strip length: 13-14mm
- Withstanding Voltage: 1.6KV / 8KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension:

KK xx 61 x 3 xxxx G

No. OF POLES
02 2 CONTACTS
03 3 CONTACTS
...
12 12 CONTACTS

Color


- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange (RAL2011/P)
- 4 Yellow (RAL1018/A)
- 5 Green (RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey (RAL7035/D)
- 9 White (RAL1102)
- C Green (RAL6018/U)

G RoHS compliant (lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KK 10.16 Series 2p-12p (W/F nut type)						
PART NO.	KKxx61x3xxxxG			DWG NO.	8KK0101		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 05/24`12	Chen Bo 05/24`12				UNIT: mm SCALE: NONE
				SHEET: 01/01	REV.: E		