



RoHS Compliant

AC需增加电源频率,
DC无电源频率/
Shows frequency for AC,
No power frequency for DC




机械指示旗视窗/
Mechanical indication flag
window

LED视窗/
LED window




当负载为20A 印字图/
Print content of 20A load

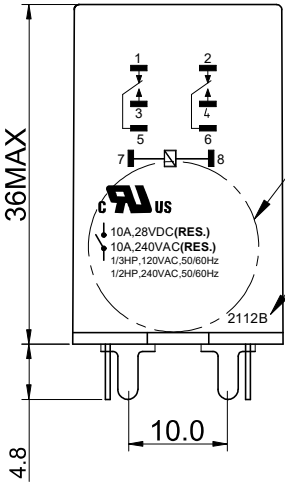

当负载为10A 印字图/
Print content of 10A load


批号 (年+周)
Lot number



防滑刻痕 /Non-slip
scoring


触点视窗/
Contact window

2.0 0.5
8X 8X



RECOMMENDED PCB LAYOUT

PCB mounting hole size tolerance ± 0.05

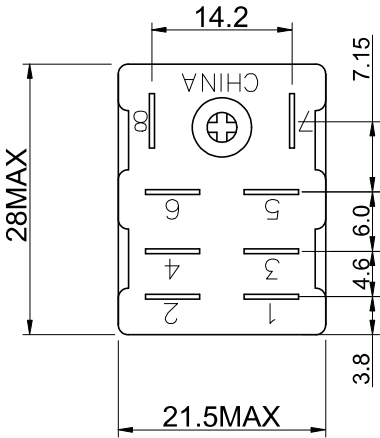

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	11/12'24	The first release	PansLee

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	AL-DPDT/LED/INDICATOR FLAG INDUSTRIAL RELAY						
PART NO.	AL2CXXPCLXXXX00G			DWG NO.	8AL2C-0002		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		PansLee	PansLee		UNIT: mm		0~1 ±0.2
		2024.11.12	2024.11.12		SCALE: NONE		>1~5 ±0.3
					REV.: B		>5 ±0.4
				SHEET: 01/02			

