
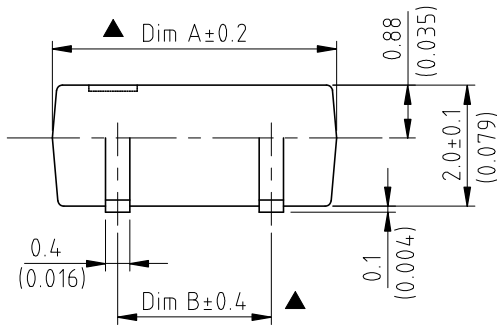
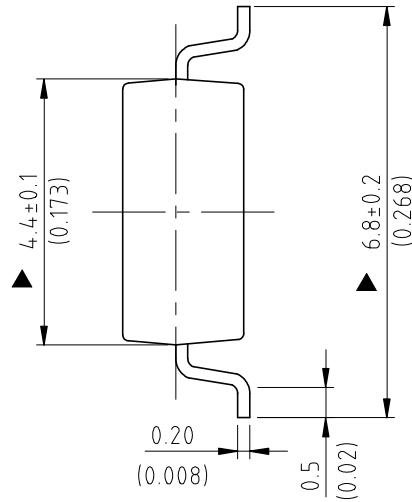



RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A0		2023.09.15	Initial Release	
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

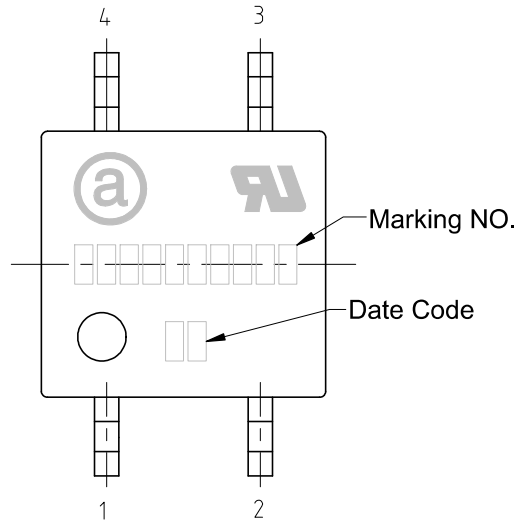

Dim B=2.54x[(Pin/2)-1]
(0.100x[(Pin/2)-1])

Pin out	Dim A	Dim B
4 Pin	4.7(0.185)	2.54(0.100)
6 Pin	8.8(0.346)	5.08(0.200)
8 Pin	9.78(0.385)	7.62(0.300)

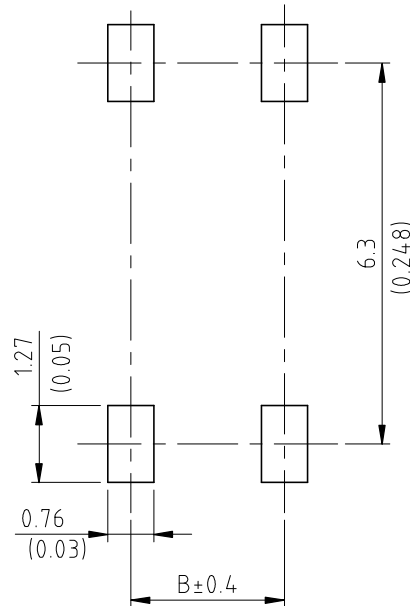

P.C.B. LAYOUT
Top View

Part No. APR 4 x xx xx x x 00 Ex0G

RoHS compliant
Any special item by customer request,
please contact sales department.
Packing type:
0 : IC Tube, 1 : Tape & Reel,
Pin number:
4 : 4pin, 6 : 6pin, 8 : 8pin,
Load voltage:
03: 30V, 04: 40V, 06: 60V, 08: 80V, 10: 100V, 20: 200V,
25: 250V, 35: 350V, 40: 400V, 60: 600V, F0: 1500V,
Contact type:
1A : 1 Form A 1B : 1 Form B 1C : 1 Form A & 1 Form B
2A : 2 Form A 2B : 2 Form B
Load type,
0: DC 1: AC&DC
Mounting type:
4: SOP
Series name : APR: MOS RELAY

Mark No. x xx xx x x

Special Number
Mounting & Load type:
T:Through hole, M:SMD type, S:SOP type
F:DC output & through hole
N:DC output & SMD, K:DC output & SOP
Load voltage:
03: 30V, 04: 40V, 06: 60V, 08: 80V, 10: 100V, 20: 200V,
25: 250V, 35: 350V, 40: 400V, 60: 600V, F0: 1500V,
Contact type:
1A : 1 Form A 1B : 1 Form B 1C : 1 Form A & 1 Form B
2A : 2 Form A 2B : 2 Form B
Pin number:
4 : 4pin, 6 : 6pin, 8 : 8pin,

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	APR Series Relay,SOP type						
PART NO.	APR 4 x xx xx x x 00 Ex0G			DWG NO.	8APR0003		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Lena 2023.09.15	Lena 2023.09.15		UNIT: mm	X.	±0.50
					SCALE: 8:1	X.X	±0.30
					REV.: A0	X.XX	±0.20
				SHEET: 01/01		X°	±1°