

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A		2024.10.09	Initial Release	Shao Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Terminal Body: PA6,
- Item ② Terminal lever: PA6 ,
- Item ③ Terminal button: PA6 ,
- Item ④ Terminal Contact: Copper alloy,
- Item ⑤ Spring: Stainless,








Electrical:

- Voltage rating: 450V
- Current rating: 17.5A
- Wire range: 0.75-2.5mm²
- Wire strip length: 8-10 mm
- Withstanding Voltage: 2.5KV AC
- Insulation Resisance: DV500V 500MΩ min
- Operating temperature: -20°C to +85°C
- Assembling temperature: -5°C to +85°C
- Safety Approval: 
- Critical dimension: 

Part No. AQT 2 10 B H N 9 x x G

RoHS compliant
(lead<4%)
In copper Alloy

00: "@" Logo (Standard)
0A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

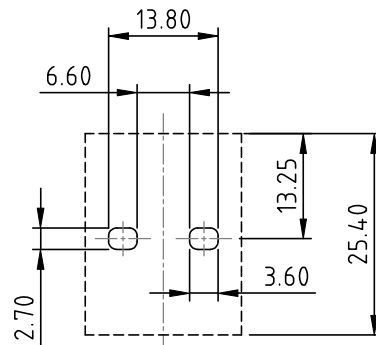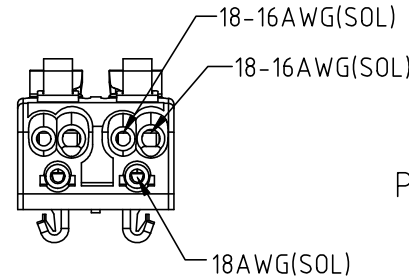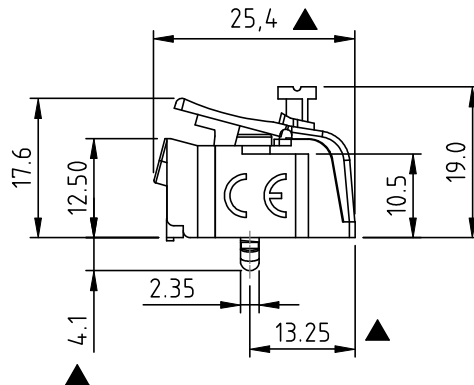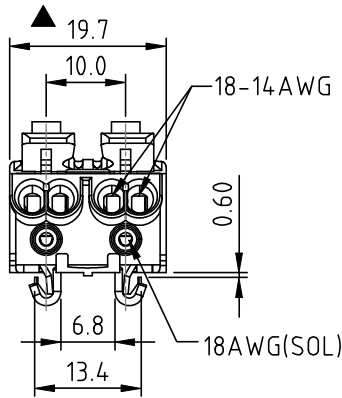

Recommended PCB layout
Top View

Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		AQT series Quick wiring terminal block,2P ,with button, with hook					
PART NO.		AQT210BHN9xxG		DWG NO.	8AQT0001		
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Shao Bo 2024.10.09	Shao Bo 2024.10.09		UNIT: mm	X. ±0.50
						SCALE: 1:1	X.X ±0.30
						SHEET: 01/01	X.XX ±0.10
						REV: A0	X° ±1°