

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A		2024.10.09	Initial Release	Shao Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ③ Terminal Body: PA6,
- Item ② Terminal lever: PA6 ,
- Item ① Terminal Contact: Copper alloy,
- Item ④ Spring: Stainless

Electrical:







- Voltage rating: 450V
- Current rating: 17.5A
- Wire range: 0.75~2.5mm²
- Wire strip length: 8~10 mm
- Withstanding Voltage: 2.5KV AC
- Insulation Resistance: DV500V 500MΩ min
- Operating temperature: -20°C to +85°C
- Assembling temperature: -5°C to +85°C
- Safety Approval: 
- Critical dimension: 

TUV (IEC60998-2-2)

Part No. AQT 3 10 N H N 9 x x G

RoHS compliant
(lead<4%)
In copper Alloy

00: "@" Logo (Standard)
0A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

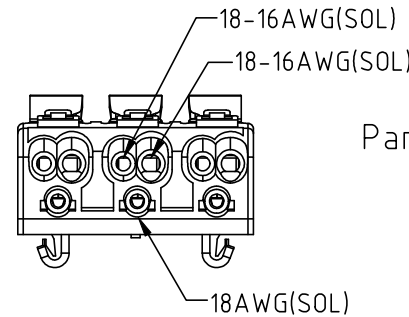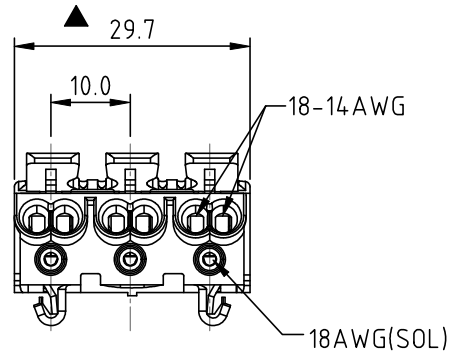

Amphenol ANYTEK				CUSTOMER COPY				
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD								
TITLE	AQT series Quick wiring terminal block,3P ,without button, with hook							
PART NO.	AQT310NHN9xxG			DWG NO.	8AQT0007			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Shao Bo 2024.10.09	Shao Bo 2024.10.09				UNIT: mm	X.
					SCALE: 1:1	X.X	±0.30	
					SHEET: 01/01	REV.: A0	X.XX	±0.10
							X°	±1°