
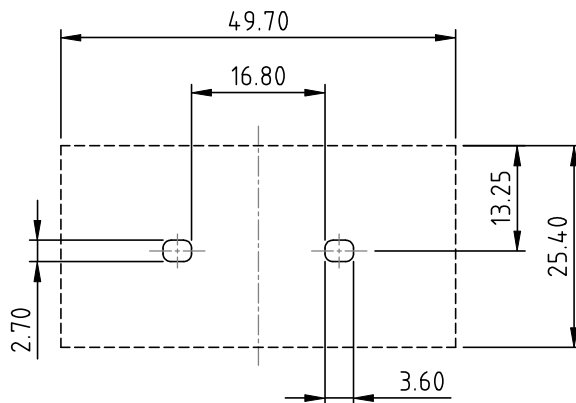
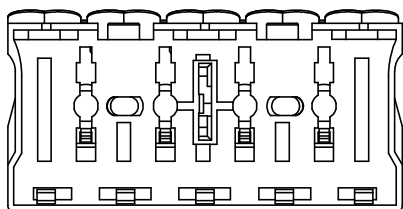
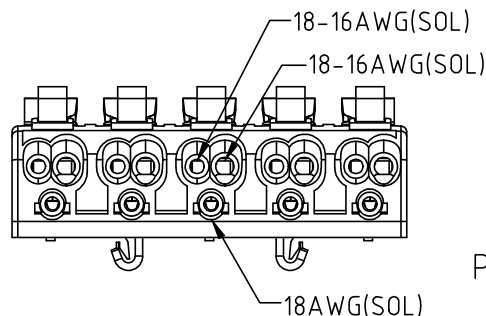
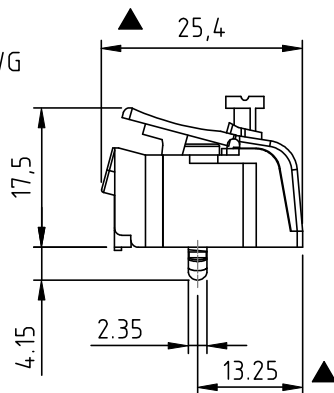
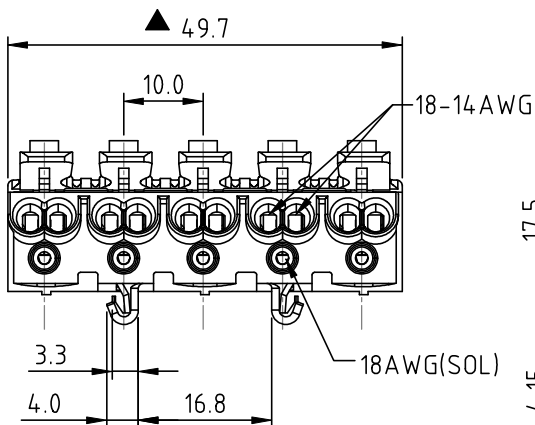



RoHS Compliant

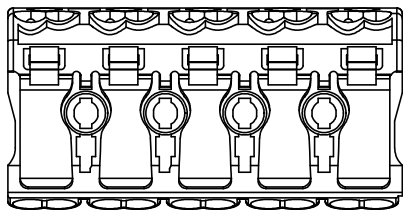

Recommended PCB layout
Top View

REV	SIGN	DATE	DESCRIPTION	APPROVER
A		2024.10.09	Initial Release	Shao Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item (a) Terminal Body: PA6,
- Item (b) Terminal lever: PA6 ,
- Item (c) Terminal button: PA6 ,
- Item (d) Terminal Contact: Copper alloy,
- Item (e) Spring: Stainless,

Electrical:

TUV (IEC60998-2-2)

- Voltage rating: 450V
- Current rating: 17.5A
- Wire range: 0.75-2.5mm²
- Wire strip length: 8-10 mm
- Withstanding Voltage: 2.5KV AC
- Insulation Resistance: DV500V 500MΩ min
- Operating temperature: -20°C to +85°C
- Assembling temperature: -5°C to +85°C
- Safety Approval:
- Critical dimension:

Part No. AQT 5 10 B H N 9 x x G

RoHS compliant
(lead<4%)
In copper Alloy

00: "@" Logo (Standard)
0A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		AQT series Quick wiring terminal block,5P, with button, with hook			
PART NO.	AQT510BHN9xxG			DWG NO.	8AQT0013
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Shao Bo 2024.10.09	Shao Bo 2024.10.09		Tolerance
					X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
				SHEET: 01/01	UNIT: mm SCALE: 1:1 REV.: A0