

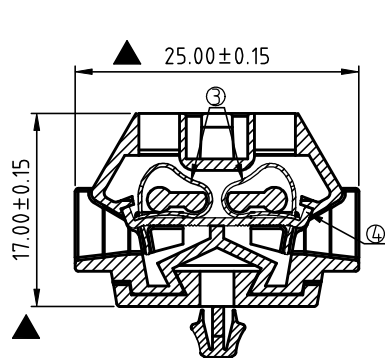


RoHS Compliant

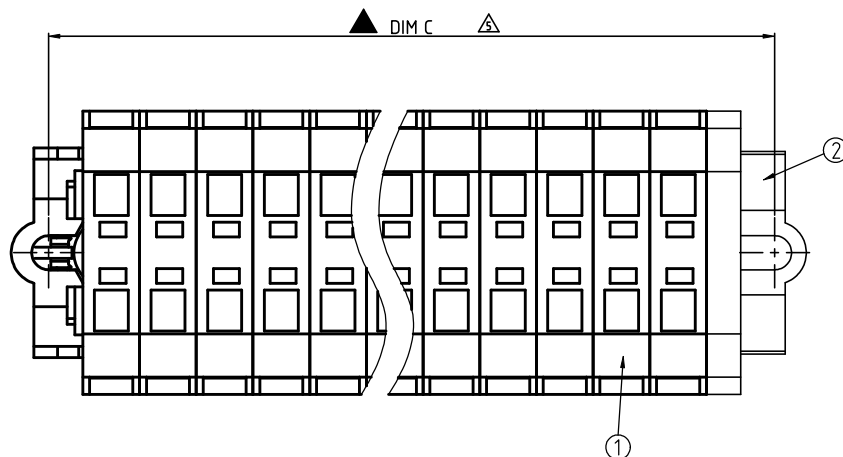

SECTION A-A

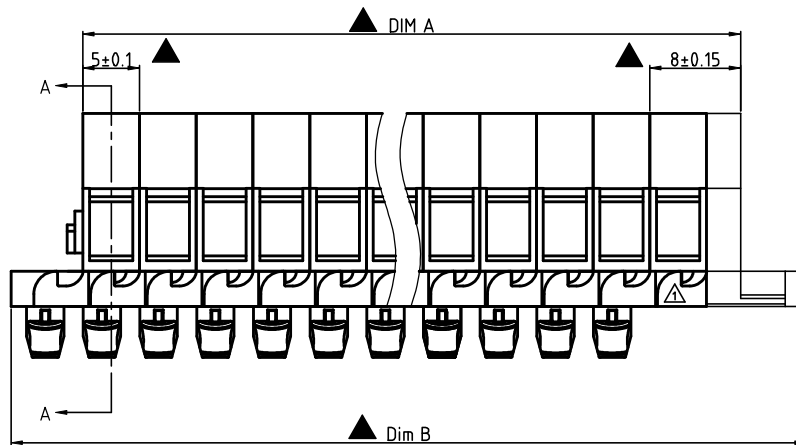

Dimension

DIM A	N×5.0+3.0
DIM B	N×5.0+15.1
DIM C	N×5.0+9

N=Number of poles

Poles	Tolerance
1P-5P	±0.20
6P-10P	±0.30
11P-15P	±0.40
16P-20P	±0.50
21P-24P	±0.60

REV	SIGN	DATE	DESCRIPTION	APPROVER
B	△	03/18`11	Structure is changed	Runner
C	△	07/02`12	Rated current is changed from 15A to 10A	Runner
	△	07/02`12	Add "cULus" Safety Approval logo	Runner
D	△	08/28`12	Update the drawing	Da cheng
E	△	07/17`18	DIM C:N×5.0+7.9 change to DIM C:N×5.0+9	Terry
	△	07/17`18	Modify the material description	Terry
	△	07/17`18	Modify the drawing frame	Terry
	△	07/17`18	Modify the Critical dimension	Terry
	△	07/17`18	Update the cutaway view	Terry
	△	07/17`18	Add the P/N code	Terry

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Insulating body NL66 (UL94V-0)
- Item ② Insulating cover NL66 (UL94V-0)
- Item ③ Wire guard Stainless Steel
- Item ④ Contacts PIN Brass Bright Tin plated

Electrical

cULus

IEC

- Rated voltage: 300V 400V
- Rated current: 10A 18A
- Wire range:
- Solid wire: 28-16AWG 0.08-1.5mm²
- Stranded wire: 28-16AWG 0.08-1.5mm²
- Wire strip length: 8-9mm
- withstanding voltage: 1.6kv 6kv

- Safety Approval:



- Critical dimension:

Part No:

DS 240 xx 1 x xxx G

RoHS compliant
(lead<4%)
In copper Alloy

- 01 1 pole
- 02 2 poles
- 03 3 poles
-
- 24 24 poles

- Color
- 0 Black
 - 5 Gree(RAL6018/T)
 - 6 Blue
 - 8 Grey(RAL7004/P)

0000:"@Logo (Standard)
000A:"ANYTEK"Logo
Any special item by
customer request,
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		DS 240 Series With Snap-in Mounting Feet type						
PART NO.		DS240xx1xxxxG			DWG NO.	8DS240-0002		
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
			Terry 2018.07.17	Terry 2018.07.17		UNIT: mm	X. ±0.5	
						SCALE: NONE	X.X ±0.3	
					SHEET: 01/01	REV.: E	X.XX ±0.1	
							X° ±1°	