

SIGN	DATE	DESCRIPTION	APPROVER
△	04/19'10	Part NO.is changed	Aaron
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material




- Item① Clamp : Brass , Ni plated
- Item② Terminal screw: Steel Zinc plating "- " slot type
- Item③ Wire guard solder pin : Brass,Tin plated
- Item④ Terminal housing : Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval : us

△ EB xx 21 x 3 xxxx G

			RoHS
			Pb<40,000ppm
No. of poles end	0	Black (RAL9005)	0000:"@Logo (Standard)
stackable design	2	Red (RAL3001/D)	000A:"ANYTEK"Logo
04 2x2 CONTACTS	3	Orange(RAL2011/P)	Any special item by
06 2x3 CONTACTS	4	Yellow(RAL1018/A)	customer request,
... ..	5	Green(RAL6018/T)	please contact sales
48 2x24 CONTACTS	6	Blue (RAL5015/A)	department.
	8	Grey(RAL7035/D)	

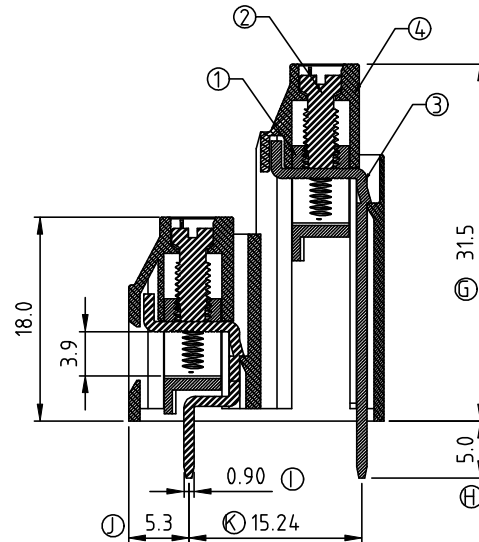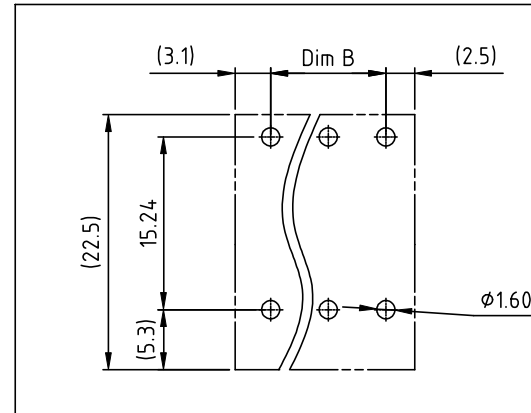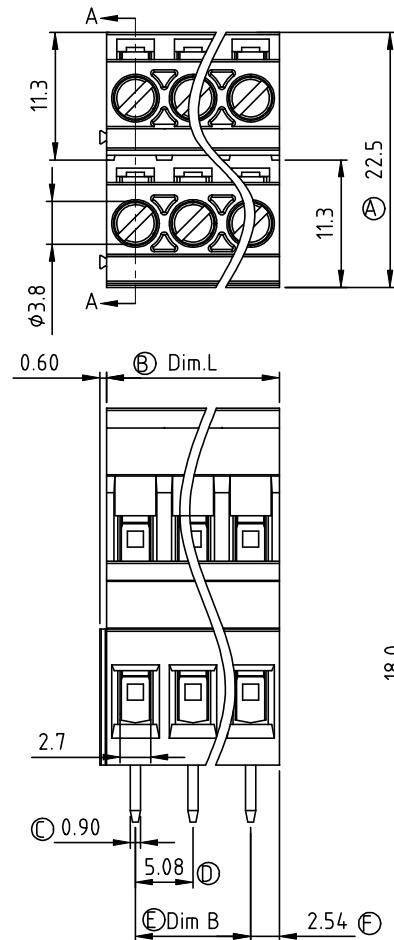

Poles	2x2p	2x3p	2x4p	2x5p	2x6p	2x7p	2x8p	2x9p	2x10p	2x11p	2x12p	2x13p
Dim L	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
Dim B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
TOL	±0.20						±0.30					
Poles	2x14p	2x15p	2x16p	2x17p	2x18p	2x19p	2x20p	2x21p	2x22p	2x23p	2x24p	
Dim L	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
TOL	±0.30						±0.40					

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	EB 5.08mm Series Solder pin in line (W/o cover)										
PART NO.	EBxx21x3xxxxG 				DWG NO.	8EB0501					
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.						Tolerance	
		Aaron 2010.04.19	Kind 2008.12.04	 						UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30					
				SHEET: 01/01	REV: C	X.XX ±0.10					
						X° ±1°					