
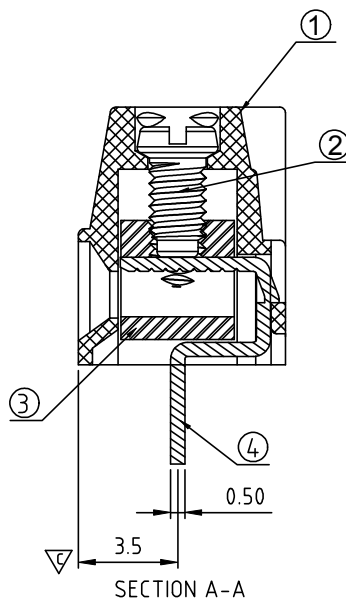
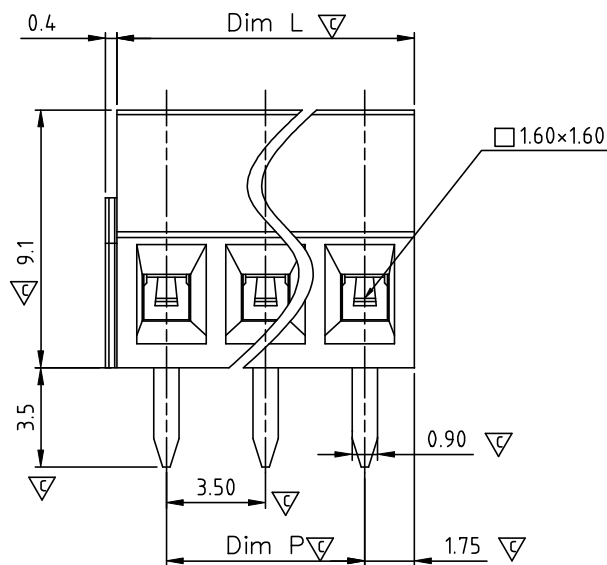
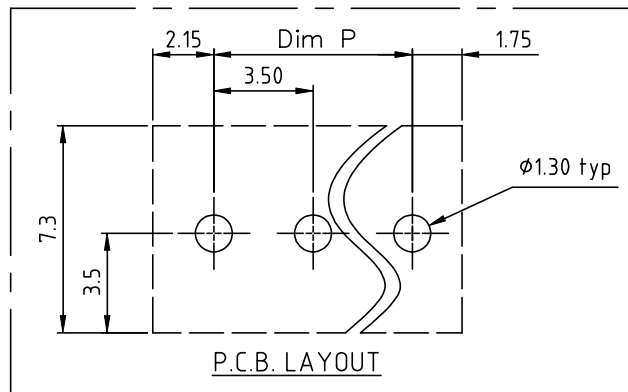


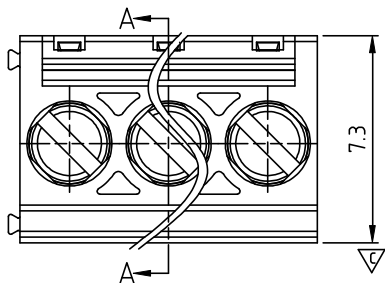

N = Number of poles
 Dim L = $N \times 3.50$
 Dim P = $(N-1) \times 3.50$

Poles	Dim L	Dim P
2-6p	± 0.15	
7-11p	± 0.20	
12-16p	± 0.25	
17-20p	± 0.30	
21-24p	± 0.40	

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Terminal housing : Thermoplastic (UL94V-0)
- Item 2 Terminal screw : Steel Zinc plating "-" slot type
- Item 3 Clamp : Brass, Ni plated
- Item 4 Wire guard solder pin : Brass, Tin plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to $+115^{\circ}\text{C}$
- Soldering temperature: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}/5 \text{ Sec}$
- Safety Approval:
- Critical dimension:

ER xx 01 x 0 xxxx G

02 2 Poles
 03 3 Poles

 24 24 Poles

0 Black (RAL9005)
 2 Red (RAL3001/D)
 3 Orange(RAL2011/P)
 4 Yellow(RAL1018/A)
 5 Green(RAL6018/T)
 6 Blue (RAL5015/A)
 8 Grey(RAL7035/D)

RoHS compliant
 (lead<4%)
 In copper Alloy

0000 Standard @ Logo
 000A Standard ANY Logo
 Any special item by
 customer request,
 please contact sales
 department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		ER 3.5 Series 180D (2P-24P)				
PART NO.	ERxx01x0xxxxG			DWG NO.	8ER0002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Runner 2012.07.26	Aaron 2010.04.06		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
				SHEET: 01/01	REV.: B	X° ±1°