
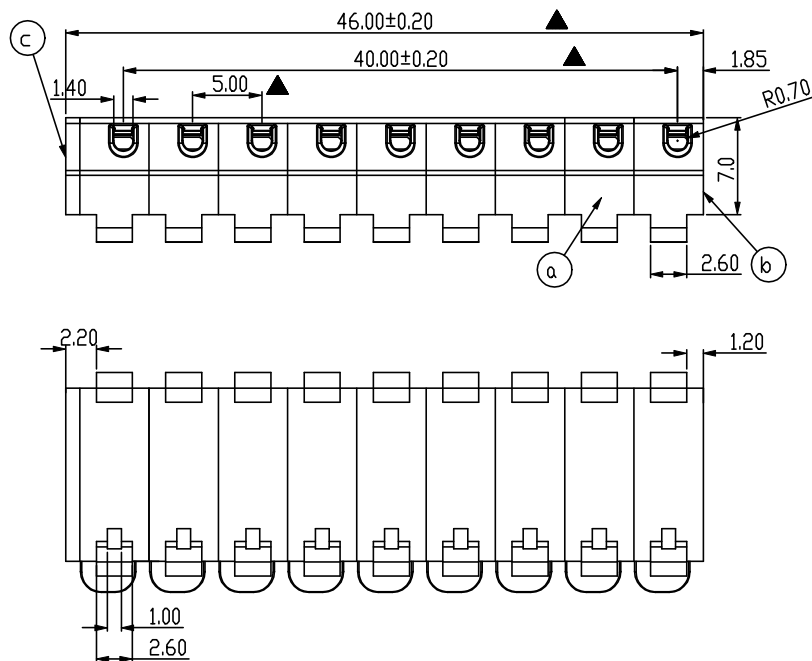



ROHS Compliant

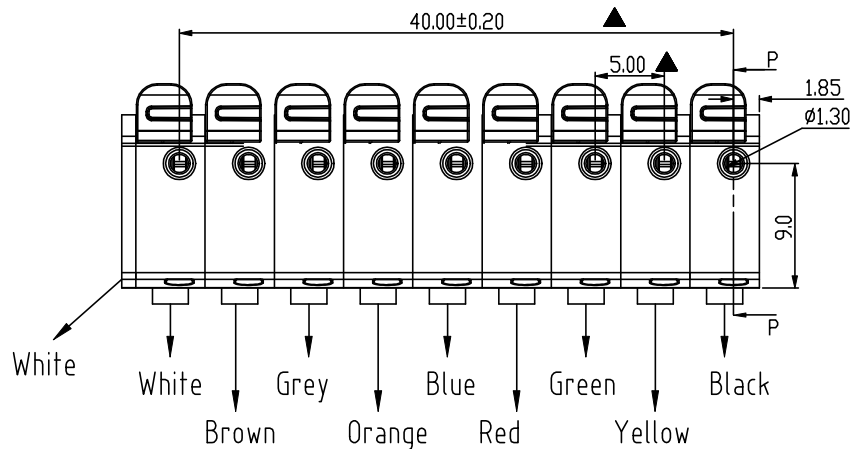


Code of color :

White	Brown	Grey	Orange	Blue	Red	Green	Yellow	Black
RAL1102	RAL8017	RAL7004/P	RAL2011/P	RAL5015/A	RAL3001/D	RAL6018/T	RAL1018/A	RAL9005

REV	SIGN	DATE	DESCRIPTION	APPROVER
B	-	20250821	The first release	Jesse
THIS IS CRED DRAWING, DO NOT REVISE MANUALLY!!!				

Notes:

- Voltage rating: 300V
- Current rating: 7A
- Wire range (AWG): 18-24 (Solid/Stranded)
- Wire strip length: 7mm
- Withstanding Voltage: 1.6KV AC Min
- Insulation resistance : 1000 MΩ or more at DC 500V
- Operating temperature: -40℃ to +115℃
- Insertion force: 100~700gf/pole, withdrawal force: 100~550gf/pole (mating pin strip: GWXX0X00XXXXG)
- Critical dimension
- SAFETY APPROVAL: cULus

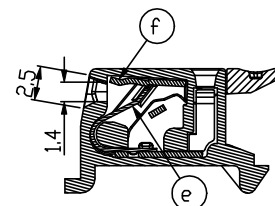

Section P-P

①	Terminal	PhBz,Tin plated	9
②	Spring clamp	Stainless steel	9
③	Lever	PA6 (UL 94-HB) Orange	9
④	Cover	PA66 (UL 94V-0)	1
⑤	Side Body	PA66 (UL 94V-0)	1
⑥	Middle Body	PA66 (UL 94V-0)	8
ITEMS	PART NAME	Description	QTY

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE:		GA-001 5.0 Series 9P Multiple colors							
PART NO.		GA00109C0000G			DWG NO.		8GA0002-001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Jesse 20250821	PansLee 20250429					UNIT: mm	
						SCALE: 1.000		X.XX .03	
				SHEET: 1 / 1		REV: B		X- '1'	