

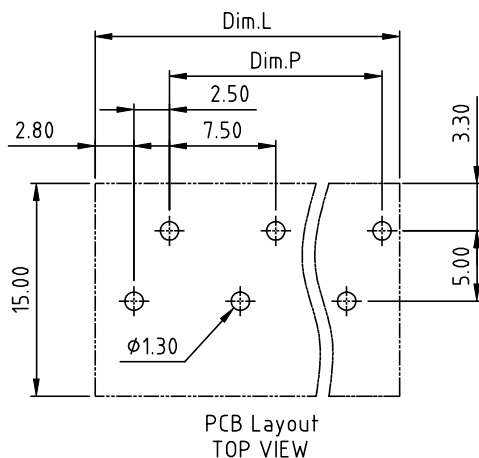
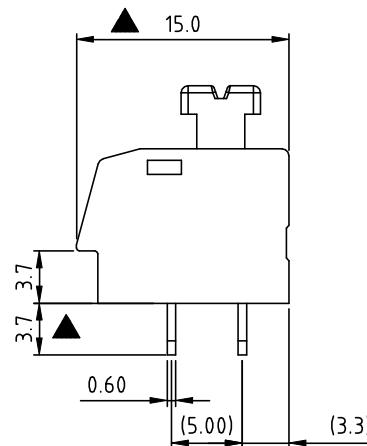
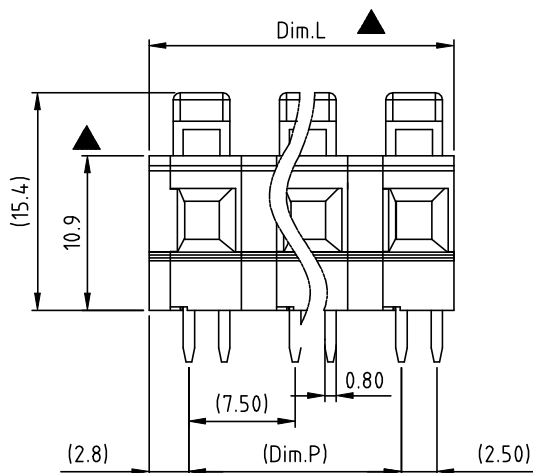


RoHS Compliant

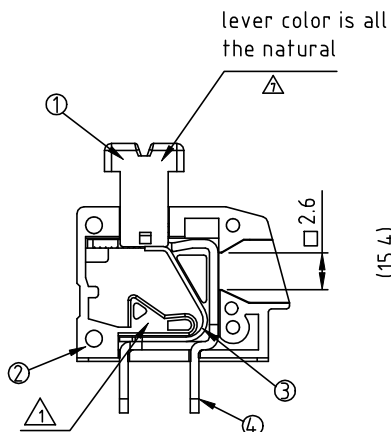

N = Number of poles
Dim L = N x 7.5 - 1.0
Dim P = (N - 1) x 7.5

	Dim L
2-6p	±0.15
7-12p	±0.25
13-16p	±0.40

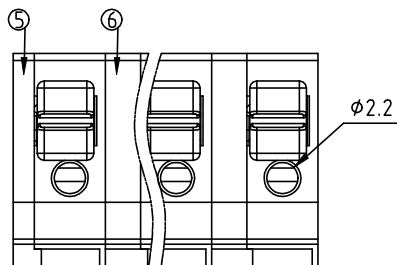

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
C	△	08/13'12	structure design is changed	Dacheng
D	△	08/25'12	Changed from 250°C±10°/5 Sec to 260°C±5°C/5 Sec	Dacheng
E	△	11/18'19	Add the Rohs compliatn&Amphenol Logo.	Guoxue
	△	11/18'19	Delete VDE& Add the Color code.	Guoxue
	△	11/18'19	Add the "Wave Soldering temperature: 260°C ±5°C/5 Sec"	Guoxue
	△	11/18'19	Delete the "Dim.P"	Guoxue
	△	11/18'19	Add the lever color.	Guoxue
F	△	11/18'19	Update the drawing	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Material:
- Item ① Terminal lever: Thermoplastic (UL94V-0)
 - Item ② Terminal housing: Thermoplastic (UL94V-0)
 - Item ③ Spring clamp: Stainless steel
 - Item ④ Solder pin: Brass. Tin plated
 - Item ⑤ Terminal cover: Thermoplastic (UL94V-0)
 - Item ⑥ Terminal pad board: Thermoplastic (UL94V-0)

Electrical: cULus △

- Voltage rating: 300 V
- Current rating: 11 A
- Wire range:
- Solid wire(AWG): 12-20
- Stranded wire(AWG): 12-20
- Wire strip length: 10-11 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C

- Wave Soldering temperature: 260°C ±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: △
- Reference dimension: (×)The dimensions of pitch are just for reference,take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

H6 xx 1 0 x 0 xxxx G

No. OF POLES
02: 2 POLES

16: 16 POLES

- COLOR △
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7004/P)
 - 9 White (RAL1102)
 - C Green(RAL6018/U)

G: RoHs compliant
(lead<4%)
In copper Alloy

1000: "@" Logo (Standard)
100A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	H6 7.5mm Series (Square hloe)						
PART NO.	H6xx10x0xxxxG			DWG NO.	8H60501		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2023.06.29	Guoxue 2023.06.29		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
				SHEET: 01/01	REV.: F	X.XX ±0.10	
						X° ±1°	