

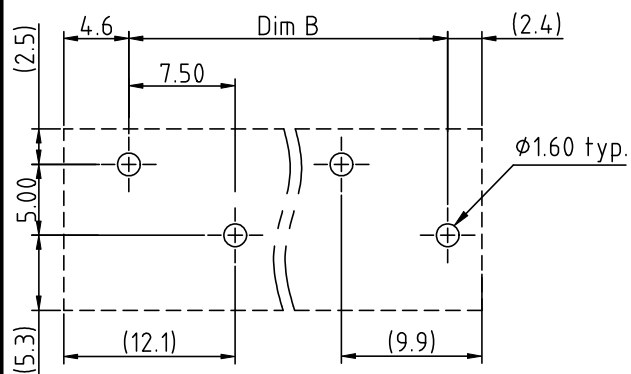
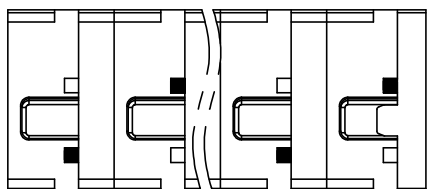
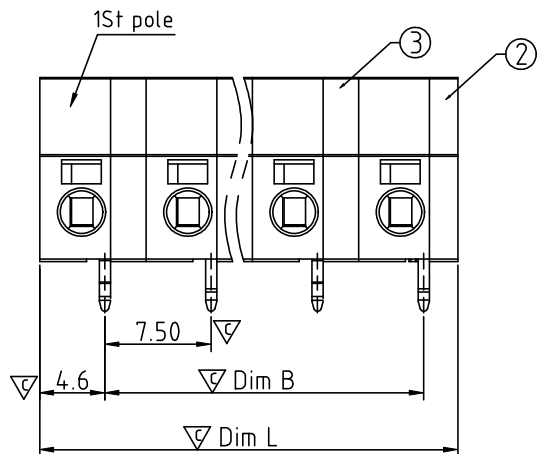


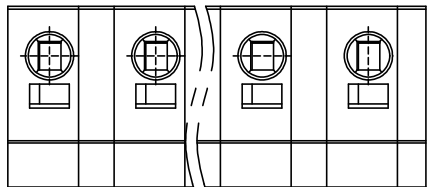

P.C.B. LAYOUT
Top view

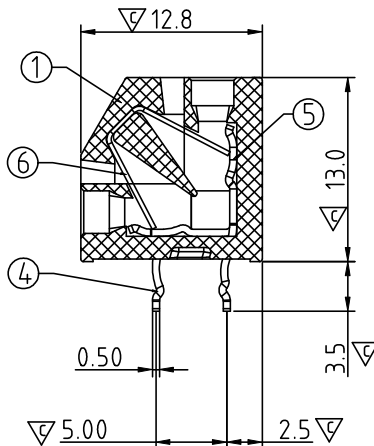

N=NUMBER OF POLES

Dim L	$N \times 7.5 - 0.5$	
Dim B	$(N-1) \times 7.5$	

POLES	Dim L	Dim B
2p-8p	± 0.20	± 0.20
10p-12p	± 0.30	± 0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	3/26'09	modify specification	JODY
△	12/17'13	update the drawing	Da cheng
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Insulating cover Thermoplastic (UL94V-0)
- Item 3 Insulating partition Thermoplastic (UL94V-0)
- Item 4 Contact on entry pin Brass, Tin plated
- Item 5 Contact on back pin Brass, Tin plated
- Item 6 Spring clamp Stainless steel

△ Electrical cULus △

- Voltage rating: 300VAC
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to $+115^{\circ}\text{C}$

△ Soldering temperature: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}/5 \text{ Sec}$

△ Safety Approval: cULus

△ Critical dimension: △

H7 xx 10 x 3 xxxx G

△ No. OF POLES
02: 2 POLES
04: 4 POLES
06: 6 POLES
12: 12 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A) customer request,
5 Green(RAL6018/T) please contact sales
6 Blue (RAL5015/A) department.
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHs compliant
(lead<4%)
In copper Alloy △

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		H7 7.5 Series Double row the 1st pole with side contact (雙數P)			
PART NO.	H7xx10x3xxxxG			DWG NO.	8H70010
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Da cheng 2013.12.17	Da cheng 2013.12.17		Tolerance
					X. ± 0.50
					X.X ± 0.30
				SHEET: 01/01	X.XX ± 0.10
				UNIT: mm	X* $\pm 1^{\circ}$
				SCALE: NONE	
				REV.: D	