

RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B		2018.07.19	The first release	Johnson
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Insulator(housing): Thermoplastic (UL94V-0)
- Item ② Wire guard: Stainless steel
- Item ③ Terminal Body(contact pin): Copper.Tin platd
- Item ④ Insulator(Cover): Thermoplastic (UL94V-0)

- Electrical:
- | | | |
|--------------------------|-----------------|------------------------|
| | cULus | IEC |
| ● Voltage rating: | 300V | 250V |
| ● Current rating: | 37A | 76A |
| ● Wire range: | | 0.2-16 mm ² |
| ● Solid wire(AWG): | 6-24 | |
| ● Stranded wire(AWG): | 6-24 | |
| ● Wire strip length: | 12-13mm | |
| ● Withstanding Voltage: | 1.6KV | 4KV |
| ● Operating temperature: | -40°C to +115°C | |
| ● Soldering temperature: | 260°C±5°C/5 Sec | |
| ● Safety Approval: | | |
| ● Critical dimension: | | |

H8 xx 0 0 x 0 xxxx G

No. OF POLES

02: 2 POLES
:
24: 24POLES

COLOR



0 Black (RAL9005)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

N = Number of poles
Dim L = N×10.0+1.7
Dim P = (N-1)×10.0

	Dim L	Dim P
1-6P	±0.15	±0.15
7-12P	±0.25	±0.25

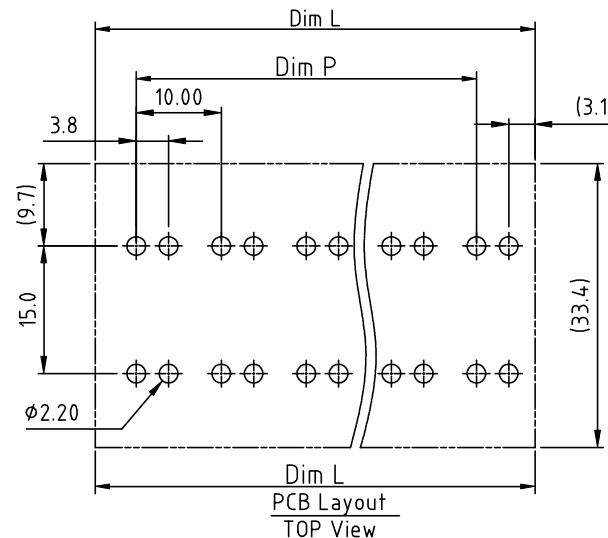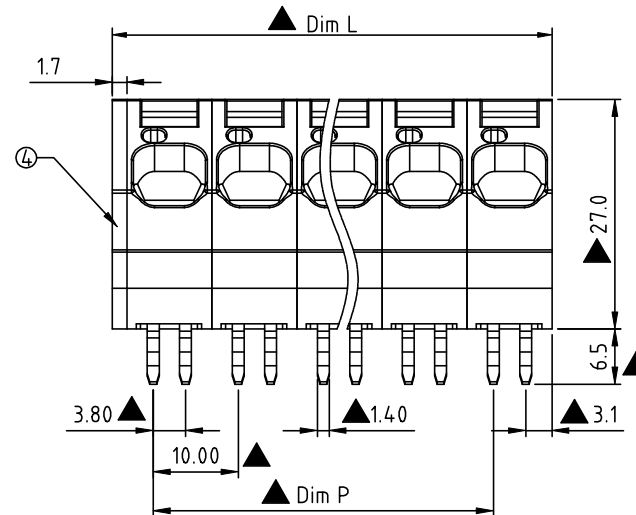

Amphenol ANYTEK					CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD				
TITLE		H8 10.0mm Series							
PART NO.		H8xx00x0xxxxG			DWG NO.		8H80201		
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance		
			Johnson 2018.07.19	Johnson 2018.07.19			UNIT: mm		X. ±0.50
							SCALE: NONE		X.X ±0.30
					SHEET: 01/01		REV.: B		X.XX ±0.10
5					6		7		