

SIGN	DATE	DESCRIPTION	APPROVER
△	01/20'07	The Soldering temperature from 245° to 250°	Aaron
△	10/29'08	ADD Tolerance	Seamus
△	09/12'12	Up date the drawing	Da cheng
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			


△Material

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal cover: Thermoplastic (UL94V-0)
- Item ③ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
- Item ④ Female long contact : Brass. Tin Plated.
- Item ⑤ Spring clamp : Stainless steel

Electrical cULus

- Voltage rating: 150VAC
- Current rating: 2A
- Wire range:
- Solid wire(AWG): 20-26
- Stranded wire(AWG): 20-26
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C △
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: 
- △ ● Critical dimension: ▽

HA xx 50 x 0 xxxx G			RoHS compliant (lead<4%) In copper Alloy
No. OF POLES	△ Body Color		0000 Standard @ Logo
02 2 POLES	0 Black (RAL9005)		000A Standard ANY Logo
03 3 POLES	2 Red (RAL3001/D)		Any special item by customer request, please contact sales department.
...	3 Orange(RAL2011/P)		
...	4 Yellow(RAL1018/A)		
24 24 POLES	5 Green(RAL6018/T)		
	6 Blue (RAL5015/A)		
	8 Grey(RAL7004/P)		
	9 White(RAL1102)		
	C Multiple colors		

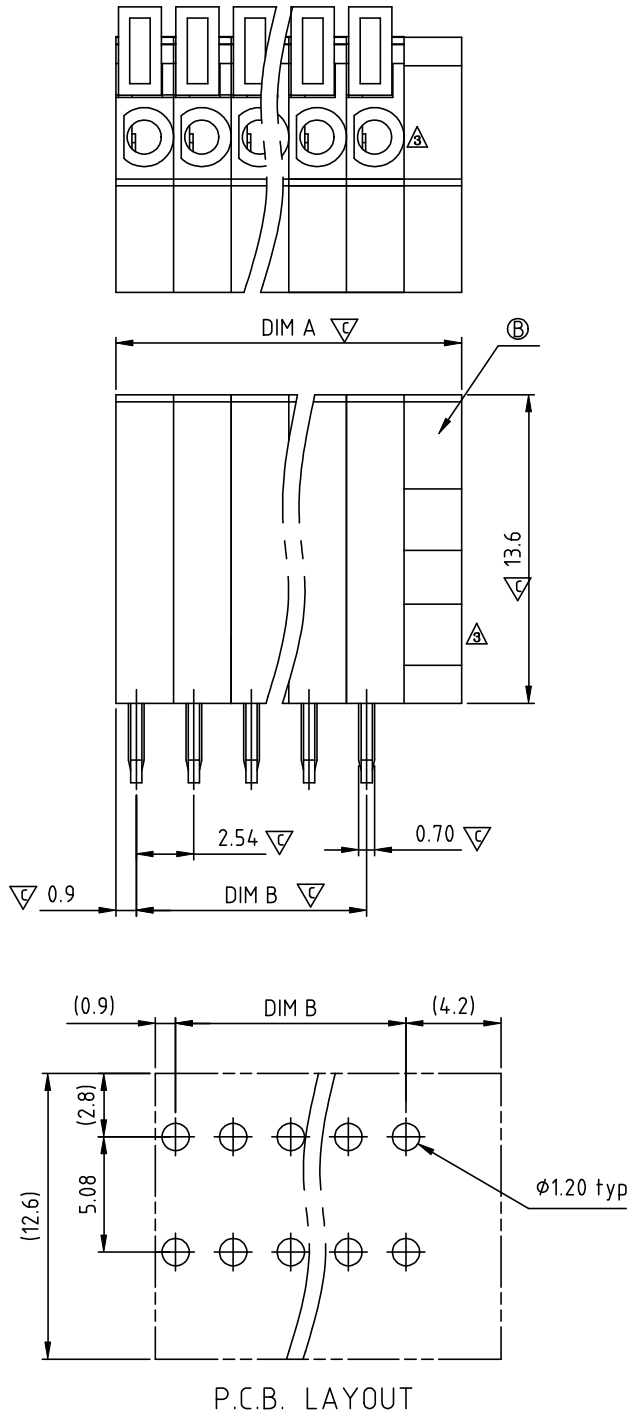

Dimension

DIM A	(N+1)×2.54
DIM B	(N-1)×2.54

N=Number of poles △

POLES	DIM A	DIM B
2p-8p	±0.15	±0.15
9p-12p	±0.25	±0.25
13p-18p	±0.30	±0.30
19p-24p	±0.40	±0.40

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		HA-2.54mm 90° Series					
PART NO.		HAxx50x0xxxxG			DWG NO.	8HA0501	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Da cheng 2012.09.12	Da cheng 2012.09.12			UNIT: mm
					SHEET: 01/01		SCALE: NONE
					REV.: F		X. ±0.50
							X.X ±0.30
							X.XX ±0.10
							X° ±1°