



SIGN	DATE	DESCRIPTION	APPROVER
⚠	12/19'15	Update the drawing	Airy min
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

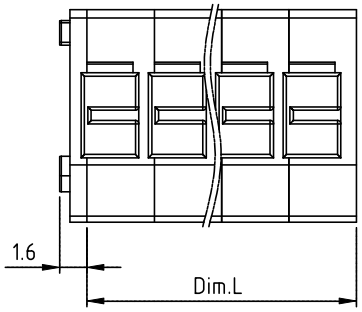

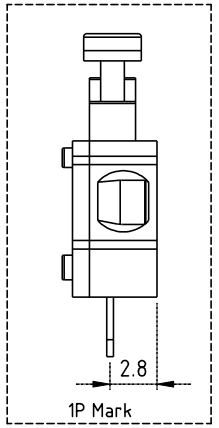

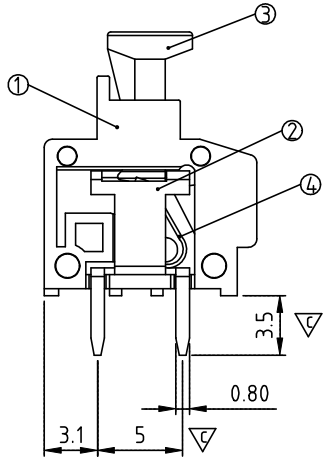


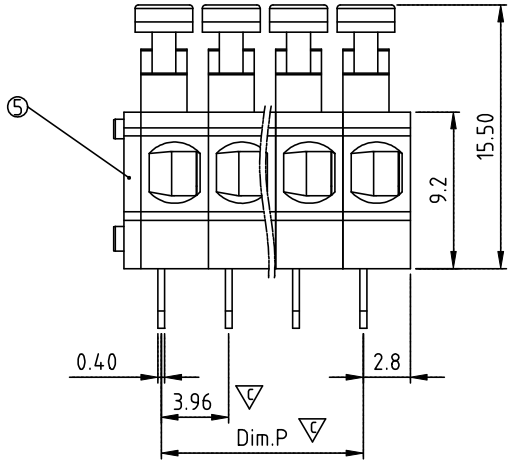


Material:

- Item ① Insulating body: Thermoplastic (UL94V-0)
- Item ② contact pin: Brass Bright Tin plated over Nickel plated.
- Item ③ Insulating lever : Thermoplastic (UL94V-0)
- Item ④ Spring clamp : Stainless steel
- Item ⑤ Side Cover : Thermoplastic (UL94V-0)

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Operating temperature:	-40°C to +115°C
Soldering temperature:	260°C ±5°C/5 Sec
⚠ Safety Approval:	
⚠ Critical dimension:	

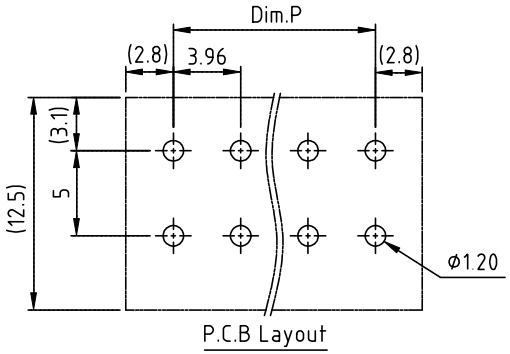

P.C.B Layout

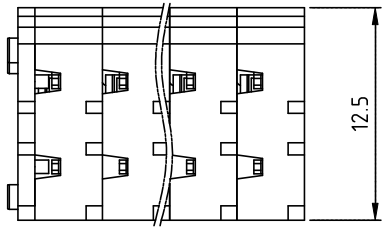

HB xx 41 x 0 xxxx G

- No. OF POLES
 - ⚠01: 1 POLES
 - :
 - 24: 24 POLES
- COLOR
 - 2: RED
 - 3: ORANGE
 - 5: GREEN
 - 8: GREY
- 0000 Standard @ Logo
 000A Standard ANY Logo
 Any special item by customer request, please contact sales department.
- RoHs compliant ⚠ (lead<4%) In copper Alloy

POLE	1	2	3	4	5	6	7	8	9	10	11	12
Dim.L	3.96	7.92	11.88	15.84	19.80	23.76	27.72	31.68	35.64	39.60	43.56	47.52
Dim.P		3.96	7.92	11.88	15.84	19.80	23.76	27.72	31.68	35.64	39.60	43.56
Tol.	±0.15						±0.25					
POLE	13	14	15	16	17	18	19	20	21	22	23	24
Dim.L	51.48	55.44	59.40	63.36	67.32	71.28	75.24	79.20	83.16	87.12	91.08	95.04
Dim.P	47.52	51.48	55.44	59.40	63.36	67.32	71.28	75.24	79.20	83.16	87.12	91.08
Tol.	±0.30						±0.40					

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	HB 3.96 mm Wlith lever Series				
PART NO.	HBxx41x0xxxxG			DWG NO.	8HB0601
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Airy min 2015.12.19	Airy min 2015.12.19	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: C	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°