

SIGN	DATE	DESCRIPTION	APPROVER
△	01/27'07	The Soldering temperature from 245° to 250°	Aaron
△	01/27'07	Add "VDE" stipulation	Aaron
△	8/6'07	The body bottom is changed.	Marvin
△	05/12'14	changed the structure of lever ///update the drawing	Da cheng
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Insulating lever Thermoplastic (UL94V-0)
- Item 3 Contact pin Brass, Tin plated
- Item 4 Spring clamp Stainless steel

△ Electrical cULus/VDE

- Voltage rating: 300VAC/450VAC
- Current rating: 10A/10A
- Wire range: 0.5-1.0mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40℃ to +115℃
- △ △ Soldering temperature: 260℃±5℃/5 Sec
- Safety Approval: cULus VDE
- △ ● Critical dimension: ▽

HF <u>xx</u> 70 x 1 <u>xxxx</u> G				⚠ RoHs compliant (lead<4%) in copper Alloy
No. OF POLES	Color	0000 Standard @ Logo		
02: 2 POLES	8 Grey (RAL 7004/P)	000A Standard ANY Logo		
03: 3 POLES	9 Orange	Any special item by		
:		customer request,		
:		please contact sales		
24: 24 POLES		department.		

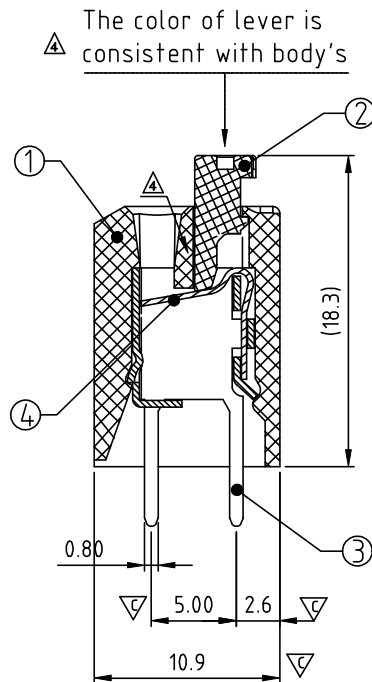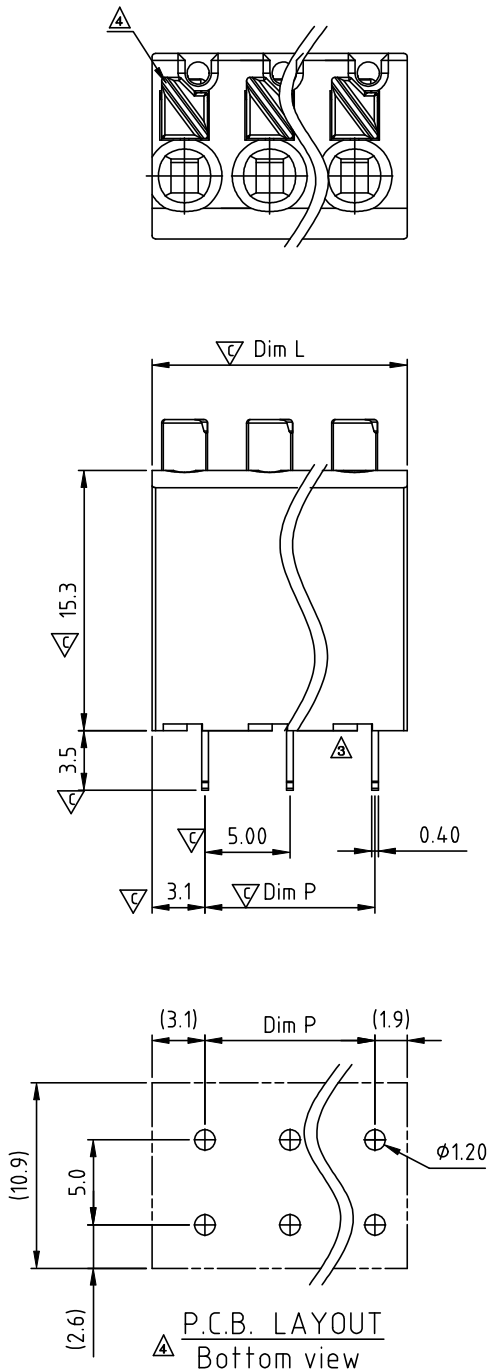

△ N=NUMBER OF POLES

Dim L	Nx5.0
Dim P	(N-1)x5.0

POLES	Dim L	Dim P
2p-6p	±0.15	±0.15
7p-12p	±0.2	±0.2
13p-18p	±0.25	±0.25
19p-24p	±0.3	±0.3

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	HF-5.0mm Series High profile type						
PART NO.	HFxx70x1xxxxG			DWG NO.	8HF0002		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Da cheng 2014.05.12	Da cheng 2014.05.12		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
				SHEET: 01/01	REV.: G	X.XX ±0.10	
						X° ±1°	