


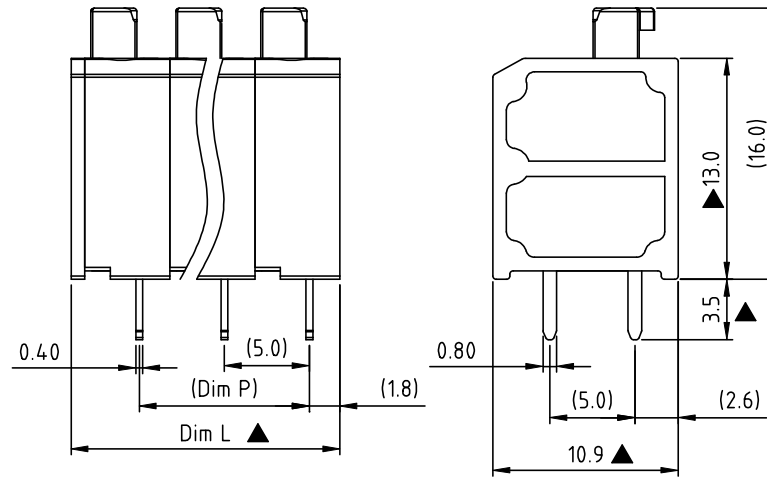


RoHS Compliant

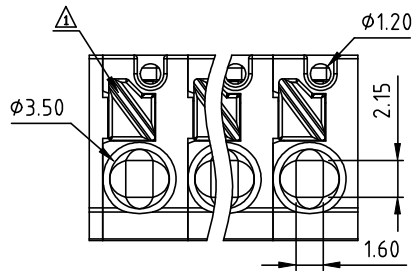


The color of lever is consistent with body's

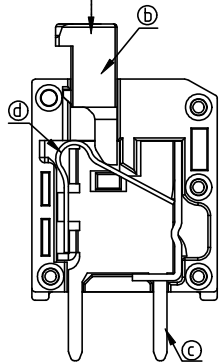

N=Number of Poles

Dim L	$N \times 5.0 + 0.80$
Dim P	$(N-1) \times 5.0$

POLES	Dim L
1p	±0.1
2p-6p	±0.15
7p-12p	±0.2
13p-18p	±0.3
19p-24p	±0.4

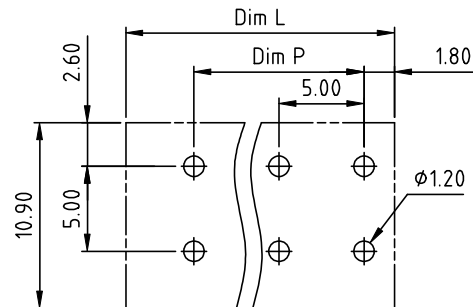

RECOMMEND P.C.B Layout

REV	SIGN	DATE	DESCRIPTION	APPROVER
B	—	05/12'14	The first release	Da cheng
C	△	05/12'14	changed the structure of lever ///update the drawing	Da cheng
D	△	08/16'18	Modify the drawing frame	Johnson
	△	08/16'18	Modify the material description	Johnson
	△	08/16'18	Modify the Electrical arguments and cancel VDE standard	Johnson
	△	08/16'18	Add critical dimension	Johnson
	△	08/16'18	Change the product number	Johnson
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

△ Material

- Item ① Insulating body Thermoplastic (UL94V-0)
- Item ② Insulating lever Thermoplastic (UL94V-0)
- Item ③ Contact pin Brass,Bright Tin plated
- Item ④ Spring clamp Stainless steel
- Item ⑤ Insulating side body Thermoplastic (UL94V-0)
- Item ⑥ Insulating cover Thermoplastic (UL94V-0)

△ Electrical

cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec

● Safety Approval: cULus

△ Critical dimension: △

- Referencel dimension(x),the dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

△ HF xx 70 x 2 xxxx G

No. OF POLES
01: 1 POLES
02: 2 POLES
:
24: 24 POLES

Body Color
0 Black (RAL9005)
1 Natural color
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHs compliant
(lead<4%)
In copper Alloy
0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HF-5.0mm Series Low profile (stackable type)				
PART NO.	HFxx70x2xxxxG			DWG NO.	8HF0P01	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Johnson 2019.04.28	Johnson 2019.04.28		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV.: D	X.XX ±0.10
				SHEET: 01/01		X° ±1°