


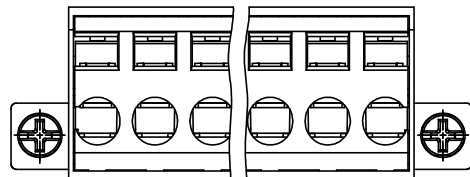
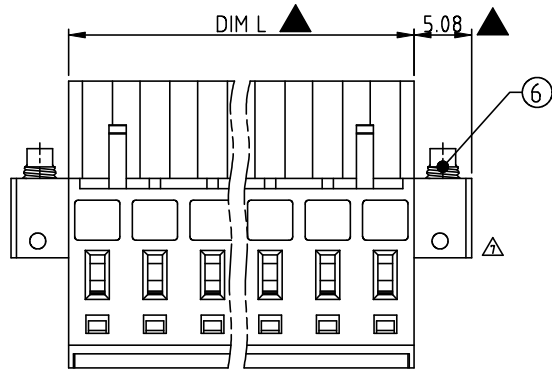


RoHS Compliant

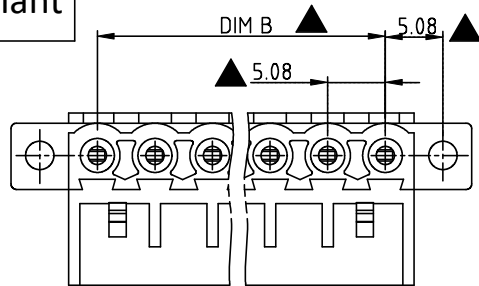

2P

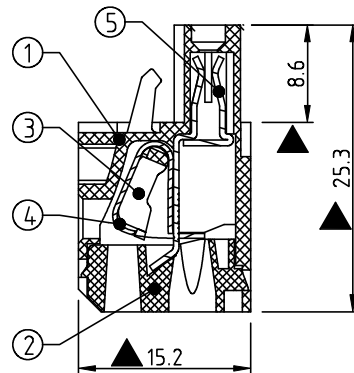

POLES	DIM L	DIM B	TOLERANCE	POLES	DIM L	DIM B	TOLERANCE
2P	10.16	5.08	+0.15 -0.15	13P	66.04	60.96	+0.35 -0.35
3P	15.24	10.16		14P	71.12	66.04	
4P	20.32	15.24		15P	76.20	71.12	
5P	25.40	20.32		16P	81.28	76.20	
6P	30.48	25.40		17P	86.36	81.28	
7P	35.56	30.48	+0.25 -0.25	18P	91.44	86.36	+0.40 -0.40
8P	40.64	35.56		19P	96.52	91.44	
9P	45.72	40.64		20P	101.60	96.52	
10P	50.80	45.72		21P	106.68	101.60	
11P	55.88	50.80		22P	111.76	106.68	
12P	60.96	55.88		23P	116.84	111.76	
				24P	121.92	116.84	



Rev.	SIGN	DATE	DESCRIPTION	APPROVER
F	△	09.4.27	Part No. wire strip length are changed.	JODY
G	△	11/25'09	The Grey code changed from RAL7004/P to RAL7035/D	Kind
H	△	03/13'10	Add the 2P mark	RUNNER
I	△	04/08'10	Get rid of the rib	RUNNER
J	△	2018.06.11	Update the drawing	Johnson
	△	2018.06.11	Modify the drawing frame	Johnson
	△	2018.06.11	Modify the Critical dimension and material notes	Johnson
	△	2018.06.11	Add the color of the P/N	Johnson
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Terminal body:Thermoplastic (UL94V-0)
- Item ② Terminal cover:Thermoplastic (UL94V-0)
- Item ③ Terminal spacer:Thermoplastic (UL94V-0)
- Item ④ Female contact:PhBz (CuSn) Tin plated
- Item ⑤ Wire guard:Stainless Steel

- △ Item ⑥ Flange screw:Steel Zinc plating M2.5

Electrical: cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Solid wire(AWG): 12-26
- Stranded wire(AWG): 14-26
- △ ● Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

- △ ● Critical dimension:

PART NO. HN xx 50 x 2 xxxx G △△ RoHS compliant (Lead<4%) In copper alloy

Poles	Color	
02 2Contacts	0 Black	0000 Standard @ Logo
03 3Contacts	5 Green (RAL 6018/T)	000A Standard ANY Logo
	6 Blue	Any special item by customer request,
24 24Contacts	△ 8 Grey (RAL 7035/D)	please contact sales department.
	△ C Green (RAL 6018/U)	



Amphenol
ANYTEK

INSPECTION COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HN 5.08 SERIES WITH FLANGE			
PART NO.		HNxx50x2xxxxG		DWG NO.	8HN0002
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.
			Johnson 2018.06.14	Johnson 2018.06.14	
				Tolerance	
				X. ±0.50	
				X.X ±0.30	
				X.XX ±0.10	
				X* ±1*	