
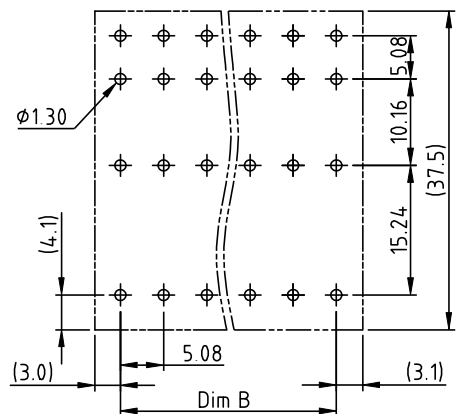
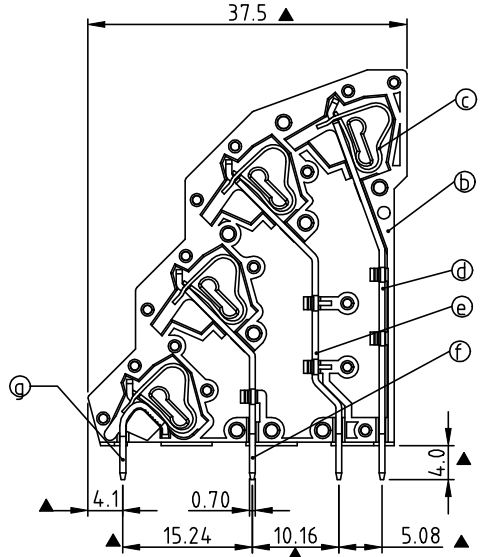


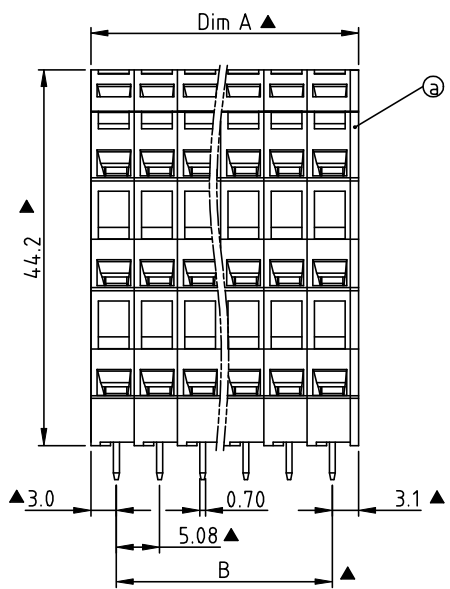

PCB Layout

N = Number of poles.
Dim.A = N*5.08+1.0
Dim.B = (N-1)*5.08

POLE	4×2 ~ 4×6	4×7 ~ 4×12	4×13 ~ 4×18	4×19 ~ 4×24
Dim.A	±0.15	±0.25	±0.35	±0.45
Dim.B	±0.15	±0.25	±0.30	±0.40

REV	SIGN	DATE	DESCRIPTION	APPROVER
C	Δ	07/02'11	No. OF POLES is changed	Runner
D	Δ	09/24'11	Add is "cULus" mark	Runner
E	Δ	2017.11.28	update the drawing	Zhihua

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item a Insulator(Cover): Thermoplastic (UL94V-0)
- Item b Insulator(housing): Thermoplastic (UL94V-0)
- Item c Spring clamp: Stainless steel
- Item d Contact pin (fourth level): Brass, Tin plated
- Item e Contact pin (third level): Brass, Tin plated
- Item f Contact pin (second level): Brass, Tin plated
- Item g Contact pin (first level): Brass, Tin plated
- Electrical: cULus
- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec Δ

- Δ ● Safety Approval: cULus
- Critical dimension: ▲

HS xx 3 0 x 0 xxxx G

No. OF POLES ———
G RoHS compliant Δ (lead<4%)
In copper Alloy

08: 4×2 POLES
92: 4×23 POLES
96: 4×24 POLES

COLOR ———
0: BLACK
5: GREEN (RAL 6018/T)
6: BLUE
8: GREY (RAL 7004/P)

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HS 5.08mm Series (Solder pins in line)			
PART NO.	HSxx30x0xxxxG			DWG NO.	8HS0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Zhihua 2017.11.28	Zhihua 2017.11.28		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
				SHEET: 01/01	REV.: E