
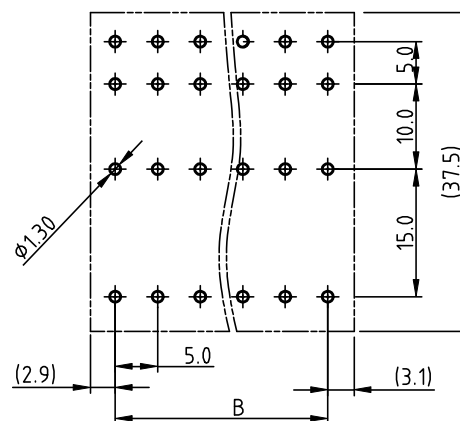



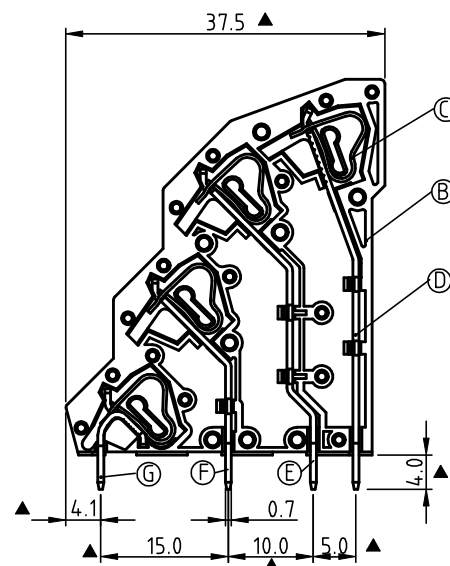

PCB Layout

POLE	$4 \times 2 \sim 4 \times 6$	$4 \times 7 \sim 4 \times 12$	$4 \times 13 \sim 4 \times 18$	$4 \times 19 \sim 4 \times 24$
Dim.A	± 0.15	± 0.25	± 0.35	± 0.45
Dim.B	$+0.15$	$+0.25$	$+0.30$	$+0.40$

POLE	$4 \times 2 \sim 4 \times 6$	$4 \times 7 \sim 4 \times 12$	$4 \times 13 \sim 4 \times 18$	$4 \times 19 \sim 4 \times 24$
Dim.A	± 0.15	± 0.25	± 0.35	± 0.45
Dim.B	$+0.15$	$+0.25$	$+0.30$	$+0.40$

THIS IS CAD DRAWING. DO NOT REVISE MANUALLY!!!!

Material:

- Item ① Insulator(Cover): Thermoplastic (UL94V-0)
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ Spring clamp: Stainless steel
- Item ④ Solder Pin (The fourth layer) : Brass, Tin plated
- Item ⑤ Solder Pin (The third layer) : Brass, Tin plated
- Item ⑥ Solder Pin (The second layer) : Brass, Tin plated
- Item ⑦ Solder Pin (The first layer) : Brass, Tin plated

Electrical: cULus

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec 

 ● Safety Approval: 

- Critical dimension: ▲

HS xx 0 0 x 0 xxxx G

△ No. OF POLES 08: 4×2 POLES 92: 4×23 POLES 96: 4×24 POLES COLOR 0: BLACK 5: GREEN (RAL 6018/T) 6: BLUE 8: GREY (RAL 7004/P)	G RoHS compliant △ (lead<4%) In copper Alloy 0000: "@" Logo (Standard) 000A: "ANYTEK" Mark Any special item by customer request. please contact sales department.
---	--

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD				
TITLE		HS 5.0mm Series (Solder pins in line)						
PART NO.		HSxx00x0xxxxG			DWG NO.		8HS0101	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
			Zhihua 2017.11.28	Zhihua 2017.11.28			X. ±0.50	
							X.X ±0.30	
					SCALE: NONE		X.XX ±0.10	
					SHEET: 01/01		REV: E	