
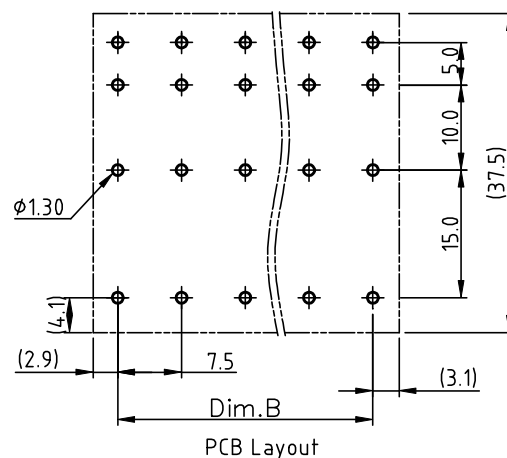

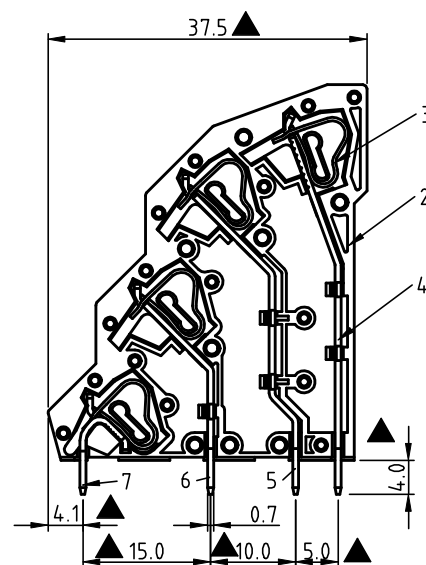


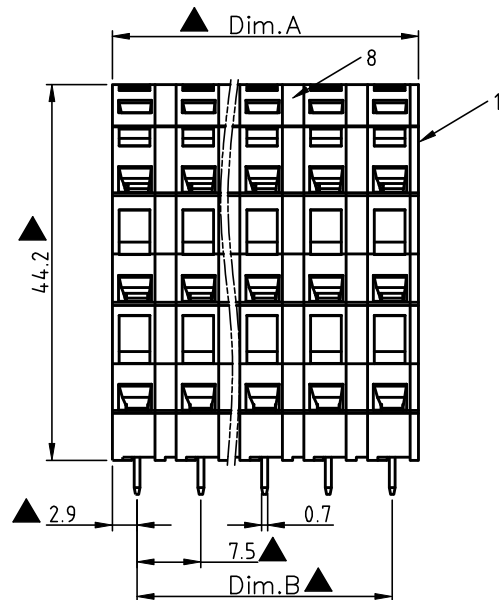

PCB Layout

△ N = Number of poles.
Dim.A = N*7.5-1.5
Dim.B = (N-1)*7.5

POLE	4×2 ~ 4×4	4×5 ~ 4×8	4×9 ~ 4×12	4×12 ~ 4×16
Dim.A	±0.15	±0.25	±0.35	±0.45
Dim.B	±0.15	±0.25	±0.30	±0.40

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B		2014.09.10	Upgrade the picture	Airy min
C	△	2017.11.27	update the drawing	Johnson

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Insulator(Cover): Thermoplastic (UL94V-0)
- Item 2 Insulator(housing): Thermoplastic (UL94V-0)
- Item 3 Spring clamp: Stainless steel
- Item 4 Solder Pin (The fourth layer) : Brass, Tin plated
- Item 5 Solder Pin (The third layer) : Brass, Tin plated
- Item 6 Solder Pin (The second layer) : Brass, Tin plated
- Item 7 Solder Pin (The first layer) : Brass, Tin plated
- Item 8 Insulator(pad board): Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec △
- Safety Approval: cULus
- Critical dimension: △

HS xx 1 0 x 0 xxxx G

No. OF POLES

08: 4×2 POLES
60: 4×15 POLES
64: 4×16 POLES

COLOR

0: BLACK
5: GREEN (RAL 6018/T)
6: BLUE
8: GREY (RAL 7004/P)

G RoHS compliant △
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	HS 7.5mm Series (Solder pins in line)				DWG NO.		8HS0201	
PART NO.	HSxx10x0xxxxG				DWG NO.		8HS0201	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance			
		Johnson 2017.11.27	Johnson 2017.11.27		UNIT: mm		X. ±0.50	
					SCALE: NONE		X.X ±0.30	
					SHEET: 01/01		X.XX ±0.10	
					REV.: C		X° ±1°	