
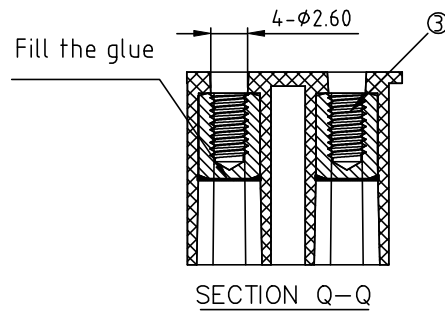
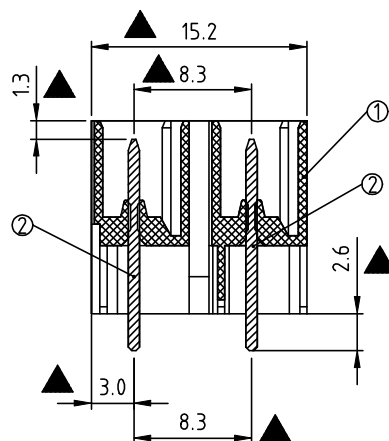
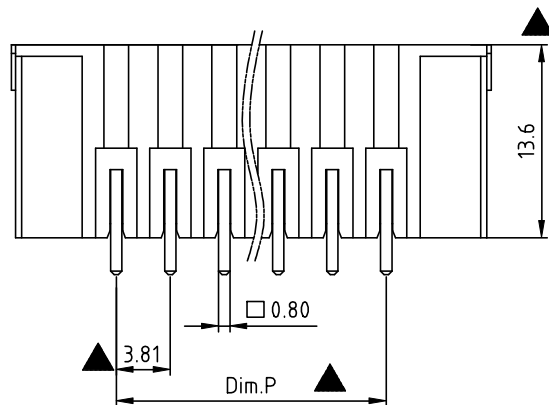
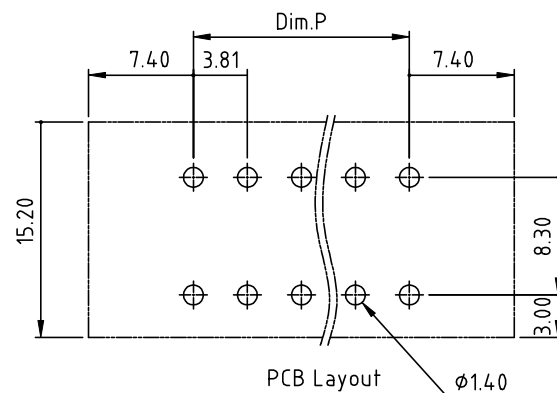


RoHS Compliant

SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

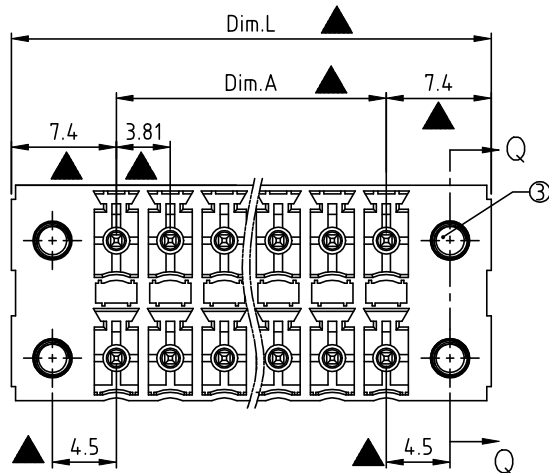

N = Number of poles

Dim.L	$(N/2-1) \times 3.81 + 14.8$
Dim.P	$(N/2-1) \times 3.81$
Dim.A	$(N/2-1) \times 3.81$

Dim.	2x2P-2x5P	2x6P-2x16P
Dim.L	± 0.20	± 0.30
Dim.P	± 0.15	± 0.25
Dim.A	± 0.15	± 0.25

Material:

- Item ① Terminal housing: High temp. polyamide (UL94V-0)
- Item ② Contact pin : Copper Tin plated
- Item ③ With flange nut: Brass M2.5

Electrical:

cULus

- Voltage rating: 300V
- Current rating: 5.5A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to $+110^{\circ}\text{C}$
- Reflow Soldering temperature: $260^{\circ}\text{C}/10$ Sec. Max.
- APPROVAL: 
- Critical dimension: 

KE xx 3 B x 0 xxxx G

No. OF POLES

04: 2x2 POLES

06: 2x3 POLES

:


32: 2x16 POLES

COLOR

0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy0000: "@" Logo (Standard)
000A: "ANYTEK" MarkAny special item by
customer request.
please contact sales
department.**Amphenol**
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 3.81mm With Flange Series (Vertical) THR type						
PART NO.	KExx3Bx0xxxxG			DWG NO.	8KE0509		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2019.11.07	Guoxue 2019.11.07		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
				SHEET: 01/01	REV: B	X°	±1°