

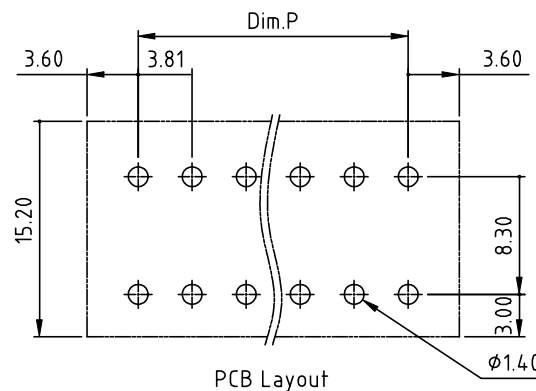
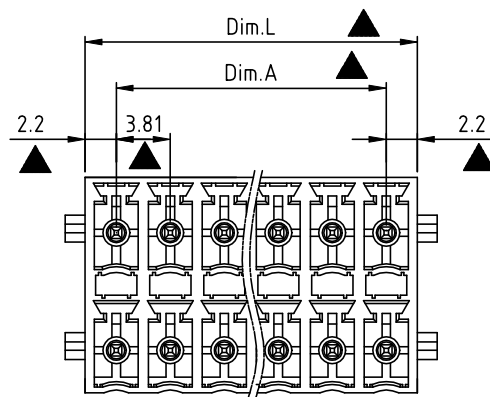


RoHS Compliant

SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

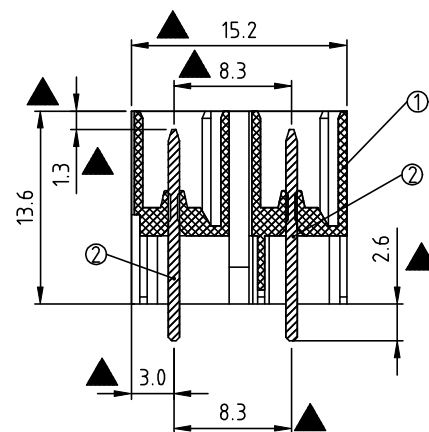

PCB Layout

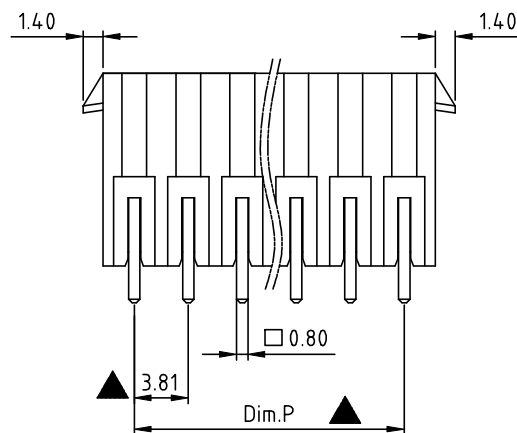

N = Number of poles

Dim.L	$(N/2-1) \times 3.81 + 4.4$	
Dim.P	$(N/2-1) \times 3.81$	
Dim.A	$(N/2-1) \times 3.81$	

Dim.	2×2P-2×5P	2×6P-2×16P
Dim.L	±0.20	±0.30
Dim.P	±0.15	±0.25
Dim.A	±0.15	±0.25

Material:

- Item ① Terminal housing: High temp. polyamide (UL94V-0)
- Item ② Contact pin : Copper Tin plated

Electrical: cULus

- Voltage rating: 300V
- Current rating: 5.5A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +110°C
- Reflow Soldering temperature: 260°C/10 Sec. Max.
- APPROVAL:
- Critical dimension:

KE xx 3 C x 0 xxxx G

No. OF POLES

04: 2×2 POLES

06: 2×3 POLES

:

32: 2×16 POLES

COLOR

0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy0000: "@" Logo (Standard)
000A: "ANYTEK" MarkAny special item by
customer request.
please contact sales
department.**Amphenol**
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		KE 3.81mm With Latch holder Series (Vertical) THR type			
PART NO.	KExx3Cx0xxxxG			DWG NO.	8KE0511
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2019.11.07	Guoxue 2019.11.07		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
				SHEET: 01/01	REV.: B