

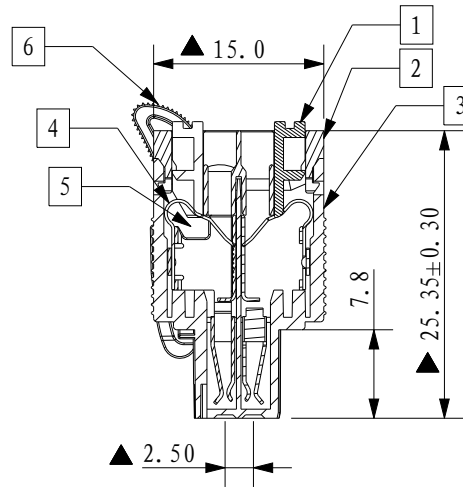


ROHS Compliant

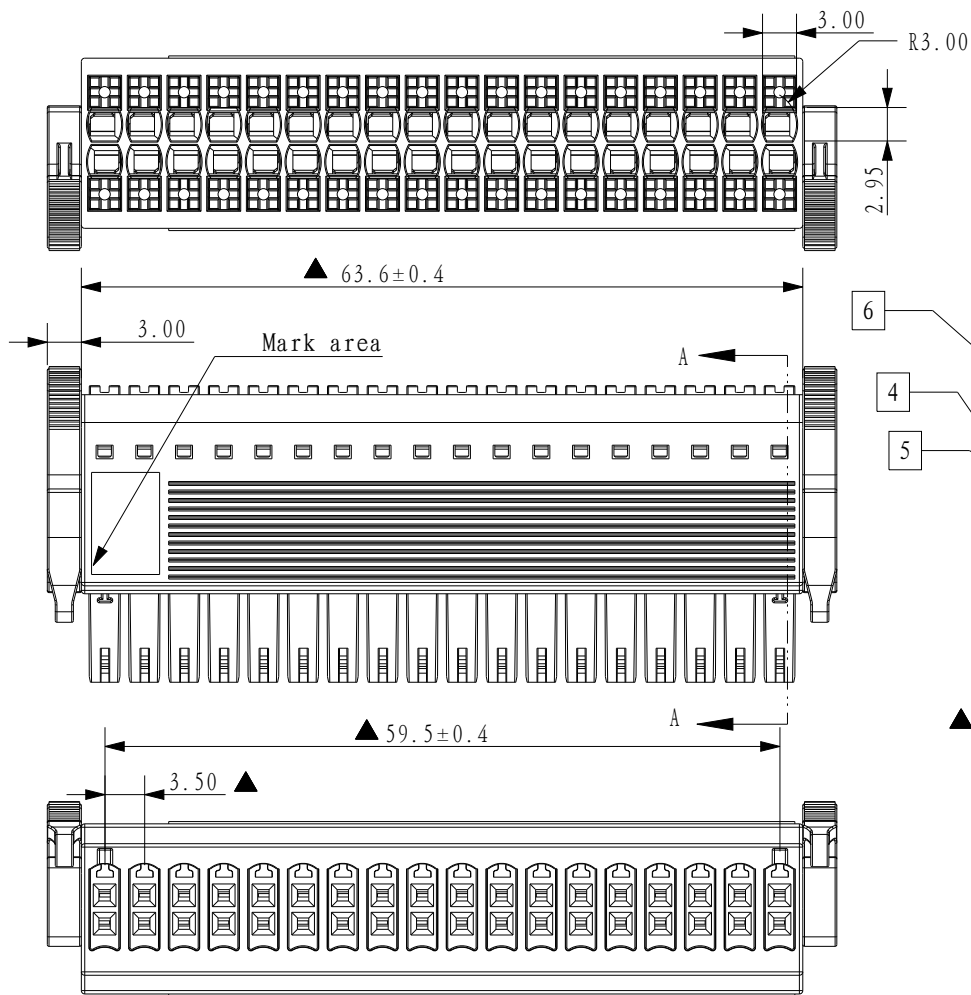

SECTION A-A

Mark content

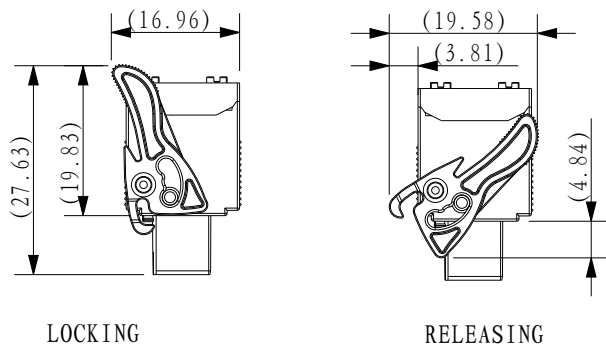

Ⓐ Mark	Ⓐ N4 cULus
ANYTEK Mark	Ⓐ ANYTEK N4 cULus

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	/	06/17' 22	The first release	Johnson

THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Lever: Thermoplastic (UL94V-0) White (RAL9003).
- Item ② CAP: Thermoplastic (UL94V-0)
- Item ③ Body: Thermoplastic (UL94V-0)
- Item ④ Spring clamp : Stainless steel
- Item ⑤ contact : Copper alloy, Bright Tin Plated.
- Item ⑥ Operating lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)

Electrical

- cULus
- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- Solid wire (AWG): 16-30
- Stranded wire (AWG): 16-30
- Wire strip length: 12-15mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Critical dimension: ▲
- Approval: cULus

N4 36 1 0 X 3 XXXX G	G RoHS compliant (lead<4%) In copper Alloy
No. of CONTACTS 36: 2*18 CONTACTS	0000: "Ⓐ" Mark 000A: "ANYTEK" Mark Any special item by customer request
	Body Color 0 Black (RAL9005) 2 Red (RAL3001/D) 3 Orange (RAL2011/P) 4 Yellow (RAL1018/A) 5 Green (RAL6018/T) 6 Blue (RAL5015/A) 8 Grey (RAL7035/D) 9 White (RAL1102)

Amphenol ANYTEK				CUSTOMER COPY			
TITLE: N4 3.5mm Series 2*18P with operating lever.				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
PART NO.	N43610X30000G/N43610X3000AG			DWG NO.	8N40001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Johnson	Johnson	SHEET: 1 / 1	UNIT: mm SCALE: 1:500 REV.: B	X.	±0.5
		06/17' 22	06/17' 22			X.X	±0.3
						X.XX	±0.1
						X°	±1°