
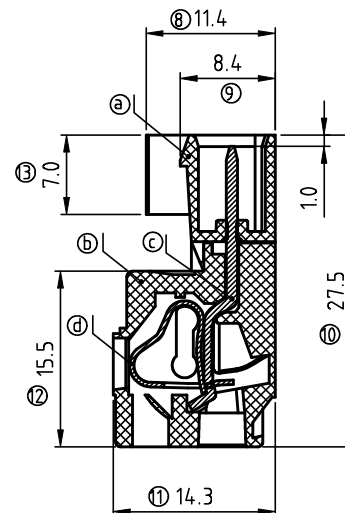
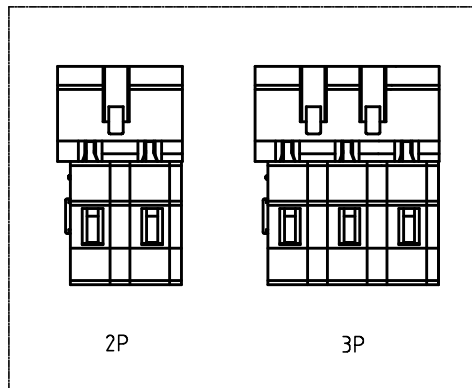
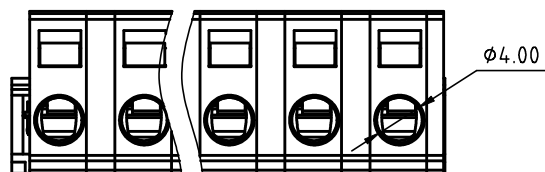
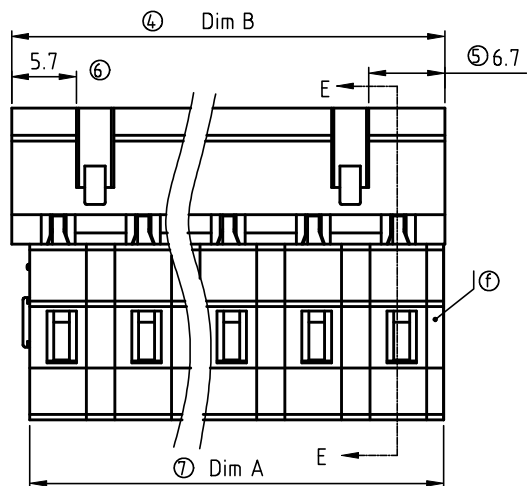


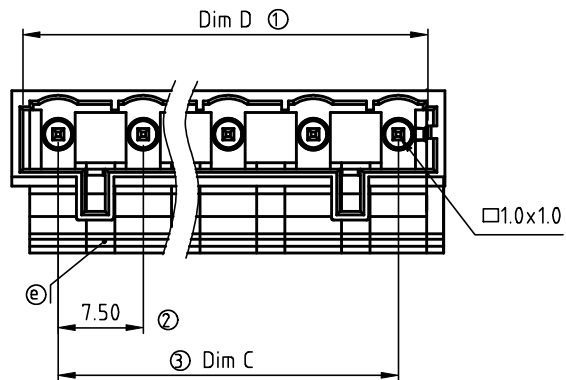

SECTION E-E

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material:

- Item a :Terminal body Thermoplastic (UL94 V-0)
- Item b :Terminal body Thermoplastic (UL94 V-0)
- Item c :Male contact pin: Brass Tin plated
- Item d :Spring clamp: Stainless steel
- Item e :Pad board: Thermoplastic (UL94V-0)
- Item f:Terminal cover: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

NB xx A 0 x 2 xxxx G

NO of poles
02 2 poles
03 3 poles
...
16 16 poles

Color
0: BLACK (RAL 9005)
5: GREEN (RAL 6018/T)
6: BLUE (RAL 5015/A)
8: GREY (RAL 7035/D)

any special item by
customer request,
please contact sales
department.

N = Number of poles

Dim A=Nx7.5+1.0

Dim B=Nx7.5+0.7

Dim C=(N-1)x7.5

Dim D=(N-1)x7.5+5.7

	Dim A	Dim B	Dim C	Dim D
2-6p	±0.20	±0.20	±0.10	±0.10
7-12p	±0.30	±0.30	±0.20	±0.20
13-16p	±0.40	±0.40	±0.30	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NB 7.5mm series W/o Flange 100% protected against mismatching						
PART NO.	NBxxA0x2xxxxG			DWG NO.	8NB0303		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
			Chen Bo 2011.03.28		UNIT: mm	X.	±0.50
					SCALE: 2/1	X.X	±0.30
					SHEET: 01/01	X.XX	±0.10
					REV.: B	X°	±1°