

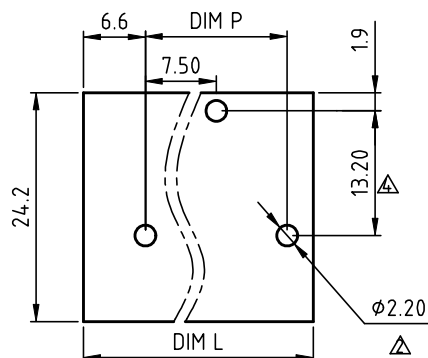





P.C.B Layout
Top view

N=NUMBER OF POLES

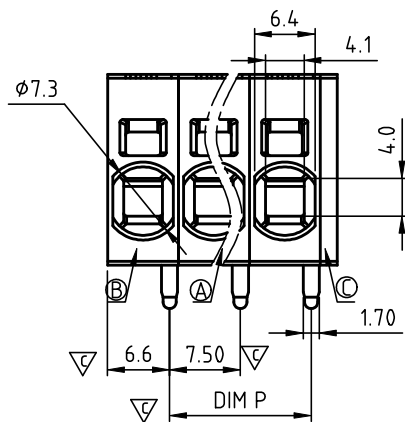

DIM		TOL		
		1P--5P	7P--11P	13P--15P
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

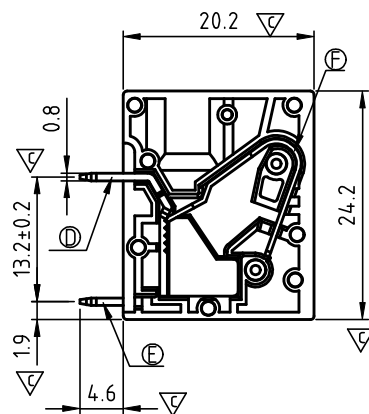

NK xx A 1 x 1 xxxx G

△△ No. OF POLES
01: 1POLES
03: 3 POLES
:
15: 15 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
△8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

SIGN	DATE	DESCRIPTION	APPROVER
△	09/15`11	The color is changed from RAL7035/D to RAL7004/P	Runner
△	09/15`11	The dimension is changed from 2.1 to 2.2	Runner
△	09/15`11	The Material is changed	Runner
△	09/15`11	The tolerance is changed	Runner
△	09/25`13	change the dimension from 18.6&2.6 to 19.2&3.2	Da cheng
△	09/25`13	change the electrical specification	Da cheng
△	12/28`13	update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item A Terminal body: Thermoplastic (UL94V-0)
- Item B Terminal side body: Thermoplastic (UL94V-0)
- Item C Terminal cover: Thermoplastic (UL94V-0)
- △● Item D Contact pin : Copper, Tin Plated.
- Item E Contact pin : Copper, Tin Plated.
- Item F Spring clamp : Stainless steel

- △ Electrical: cULus
- Voltage rating: 300 V
- Current rating(Sol): 30 A
- Current rating(Str): 35 A
- Solid wire(AWG): 10-24
- Stranded wire(AWG): 8-24
- Wire strip length: 15-16 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +120°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ∇

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NK 7.5mm Series Right angle (Single tail B type)(第1P為前腳子線邊蓋) 單數P					
PART NO.	NKxxA1x1xxxxG			DWG NO.	8NK0004		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Da cheng 2013.12.28	Da cheng 2013.12.28				
SHEET: 01/01				UNIT: mm	X. ±0.50		
				SCALE: NONE	X.X ±0.30		
				REV: D	X.XX ±0.10		
					X° ±1°		