

N=Number of poles

Dim.L	$(N-1) \times 2.5+3.0$
Dim.B	$(N-1) \times 2.5$

POLES	TOLERANCE
4P - 7P	-0.15/+0.15
8P -10P	-0.20/+0.20

VER	SIGN	DATE	DESCRIPTION	APPROVER
C	△	02/13`17	Error correction , add critial dimension and safety approval	Eddie
D	△	06/17`21	Update the drawing	Rhine
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item a Terminal housing:LCP (UL94V-0)
- △● Item b Long solder pin: Copper alloy, Matte Tin plated over Nickel plated.
- △● Item c Short solder pin: Brass .Matte Tin plated over Nickel plated.

Electrical UL

- Voltage rating: 300VAC
- Current rating: 5A
- Wire range:
- Solid wire(AWG): 20-26
- Tin Dipped Stranded wire(AWG): 20-26
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec Max.

△● Safety Approval: △● Critical dimension: 

NQ xx 0 1 x 0 xxxx G

No. OF POLES

04: 4 POLES

05: 5 POLES

... ..

△ 10: 10 POLES

△ Color

0 Black (RAL9005)

1 Natural color

8 Grey(RAL7044)




G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@ " Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.**Amphenol**
ANYTEK**CUSTOMER COPY**ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NQ 2.5mm Series Without flange (SMT)4P-10P				
PART NO.	NQxx01x0xxxxG			DWG NO.	8NQ0006	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Rhine 06/17`21	Rhine 06/17`21		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
						X° ±1°
SHEET: 01/01		REV.: D				

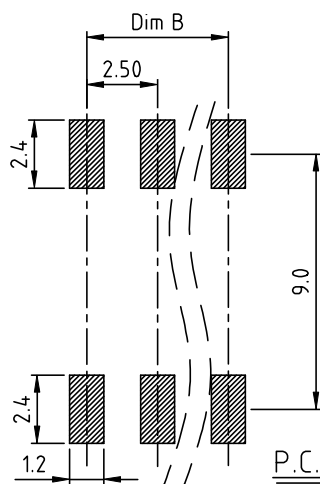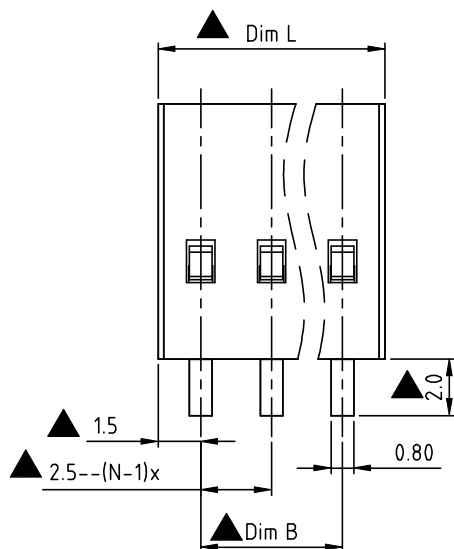

P.C.B. LAYOUT

