
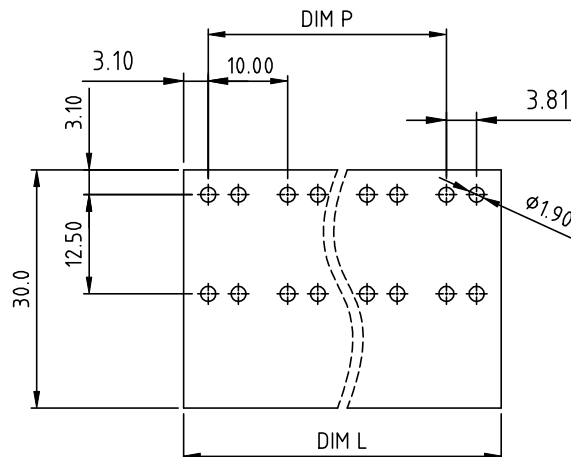
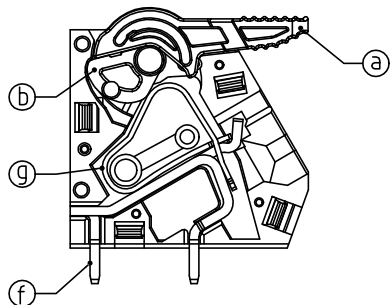
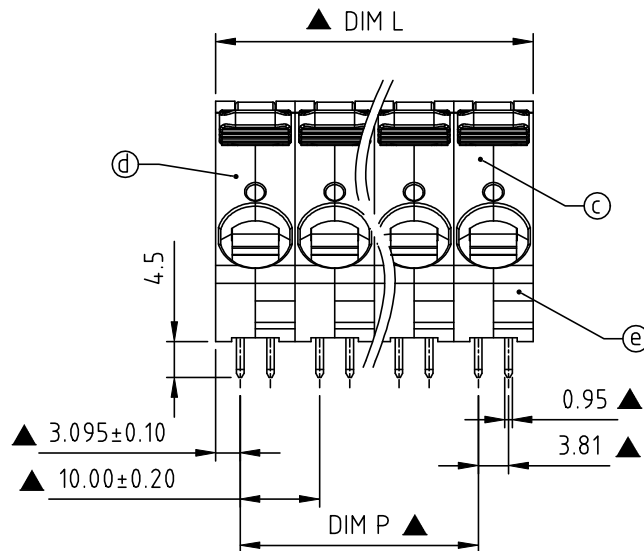


RoHS Compliant

N=NUMBER OF CONTACTS

DIM		TOL				
		1P	2P	3P-4P	5P-8P	9P-12P
Dim L	N×10.0	±0.20	±0.40	±0.40	±0.50	±0.60
Dim P	(N-1)×10.0	/	±0.20	±0.40	±0.50	±0.60

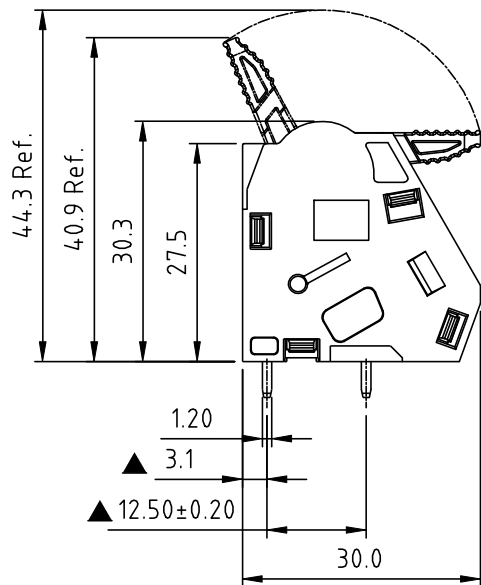

RECOMMENDED PCB LAYOUT

REV	SIGN	DATE	DESCRIPTION	APPROVER
D	△	2019.09.27	Modify the Struction	LENA
E	△	2021.11.01	Add TUV certification	Rhine
THIS IS CAD DRAWING, DO NOT REVISE MANUALL Y!!!				

Material:

- Item (a) Lever: Thermoplastic (UL 94V-0),
- Item (b) Cam: Thermoplastic (UL 94V-0),
- Item (c) Middle Body: Thermoplastic (UL 94V-0),
- Item (d) Left side body: Thermoplastic (UL 94V-0),
- Item (e) Right side body: Thermoplastic (UL94V-0),
- Item (f) Contact: Copper,Matte Tin plated over Nickel plated,
- Item (g) Spring clamp: Stainless steel

- △ Electrical: cULus TUV(EN/IEC 60947-7-4)
- Voltage rating: 300 V 400V (III/3) 400V(III/2) 800V(II/2)
 - Current rating: 55A 76A
 - Wire range(AWG): 16-6 (Solid & Stranded)
 - Wire range: 0.75mm²-10mm²(Flexible) 0.75mm²-16mm²(Solid & Rigid stranded)
 - Wire strip length: 12-13 mm
 - Withstanding Voltage: 1.6KV 3.1KV
 - Rated impulse Withstanding Voltage: 4KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval:  
 - Critical dimension: 
 - Part No:

NZ XX 0 0 X B XXXX G

No. OF POLES
01 1 Pole
02 2 Poles
...
12 12 Poles


Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NZ 10.0mm Pitch, Without Jumper Slot Series (1P-12P)				
PART NO.	NZ XX00XBXXXXG		DWG NO.	8NZ0002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Rhine 2021.11.01	Rhine 2021.11.01		X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1°
				SHEET: 01/01	UNIT: mm SCALE: 1:1 REV.: E