

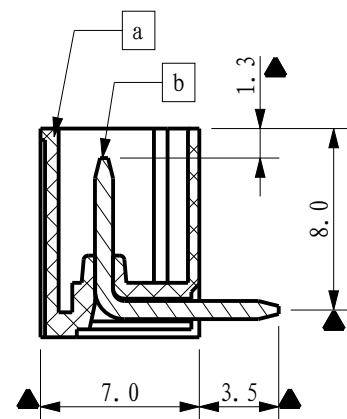
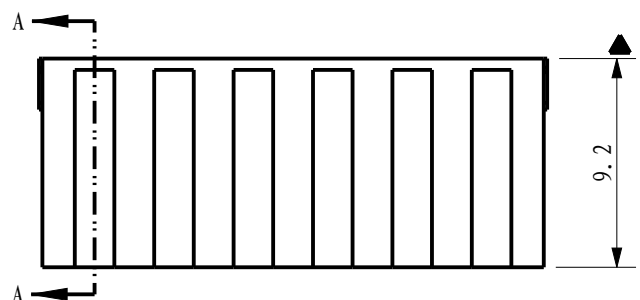


RoHS Compliant

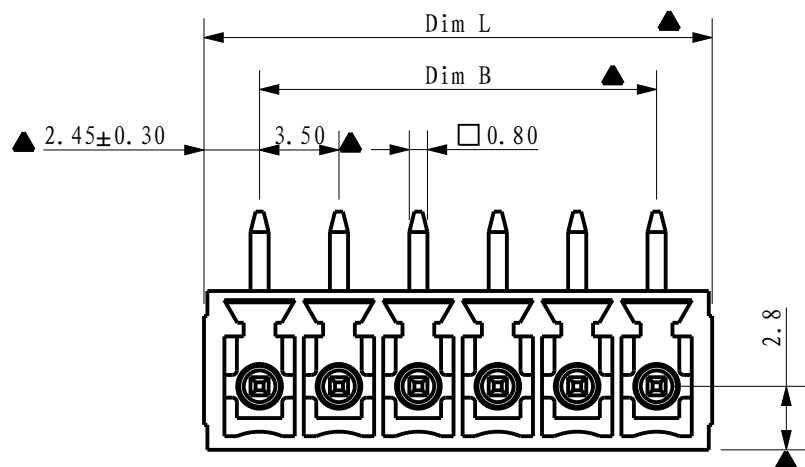

SECTION A-A

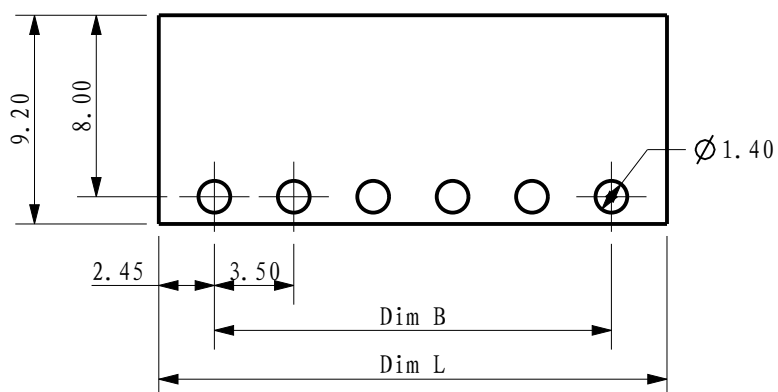

RECOMMENDED PCB LAYOUT

N=Number of poles

Dim L	(N-1) x 3. 5+4. 9
Dim B	(N-1) x 3. 5

Poles	Dim L/B Tol
2P-6P	$\pm 0. 20$
7P-12P	$\pm 0. 30$

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		11/16-20	Initial release	Chen Bo

THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!

Material:

Item a Terminal housing: Thermoplastic (UL94V-0)

Item b Male contact pin: Copper, Bright Tin plated over Nickel plated

Electrical: cULus

Voltage rating: 300V

Voltage rating: 500
Current rating: 10A

Withstanding Voltage: 2.5Kv

Operating temperature: -40°C to +115°C

Wave soldering temperature: $260^{\circ}\text{C} \pm 5^{\circ}\text{C} / 5 \text{ Sec}$

Safety approval:

Critical dimension: ▲

	0Q	<u>xx</u>	1	2	<u>x</u>	A	<u>xxxx</u>	<u>G</u>	
No. OF POLES									G RoHS compliant
02: 2 POLES									(lead<4%)
...									In copper Alloy
12: 12 POLES			0		Color				0000 Standard @ Logo
			2		Black (RAL9005)				000A Standard ANY Logo
			3		Red (RAL3001/D)				Any special item by
			4		Orange (RAL2011/P)				customer request,
			5		Yellow (RAL1018/A)				please contact sales
			6		Green (RAL6018/T)				department.
			7		Blue (RAL5015/A)				
			8		Grey (RAL7035/D)				
			9		White (RAL1102)				
			C		Green (RAL6018/U)				

Amphenol ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE:		00Q3.5 Series 2P-12P Body reverse					
PART NO.		0Qxx12xAxxxxG		DWG NO.		80Q02001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo	Chen Bo		UNIT: mm	X.	±0.5
		11/16-20	06/03-20		SCALE: 3. 0	X. X	±0.3
				SHEET: 1 / 1	REV. : B	X. XX	±0.1
						X ^o	±1 ^o