
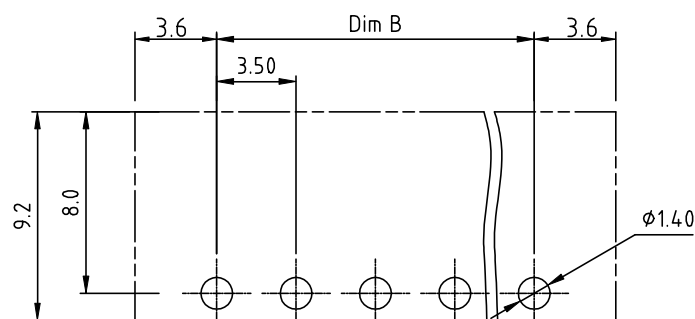
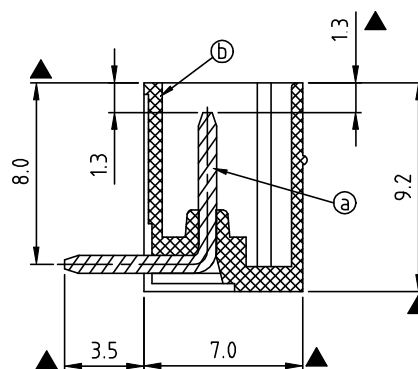
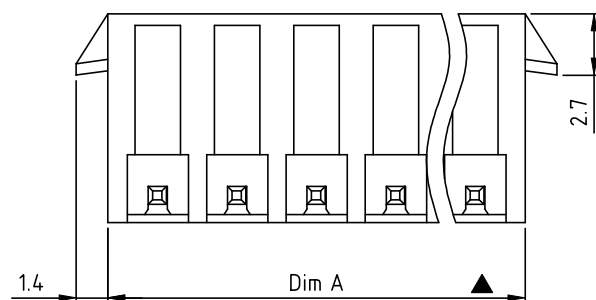


RoHS Compliant

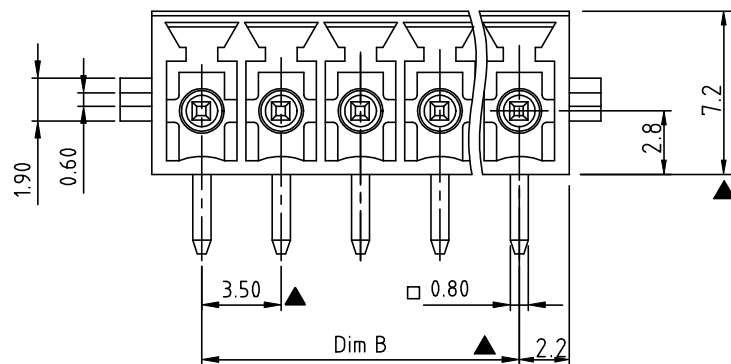

RECOMMENDED PCB LAYOUT

DIMENSION

Dim A	(N-1)×3.5+4.4
Dim B	(N-1)×3.5

N= NUMBER OF CONCATS

Poles	Dim A/B Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		08/15-19	Initial release	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Male contact pin: Copper, Bright Tin plated over Nickel plated
- Item ② Terminalhousing: Thermoplastic (UL94V-0)

Electrical:

cULus /VDE

- Voltage rating: 300V/300V
- Current rating: 10A/10.5A
- Withstanding Voltage: 1.6 KV/2.5KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▲

OQ xx 1 7 x 1 xxxx G

No. OF POLES

02: 2 POLES

24: 24 POLES

Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo
000A: "ANYTEK" Logo
Any special item by
customer request,
please contact sales
department.

**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE OQ 3.5mm Series 2P-24P Right angle With latch holder				
PART NO.	OQxx17x1xxxxG			DWG NO. 80Q04256
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Chen Bo 08/15-19	Chen Bo 08/15-19	
				UNIT: mm
				SCALE: NONE
				Tolerance
				X. ±0.50
SHEET: 01/01				X.X ±0.30
REV.: B				X.XX ±0.10
				X° ±1°