
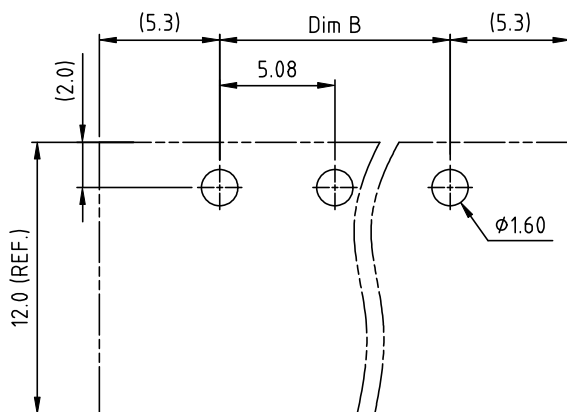
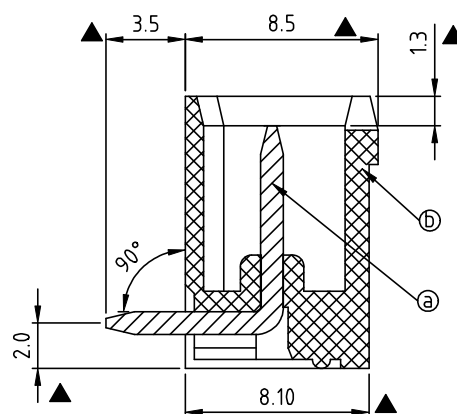
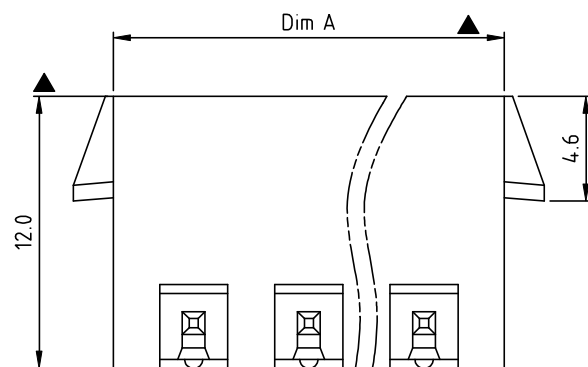


RoHS Compliant

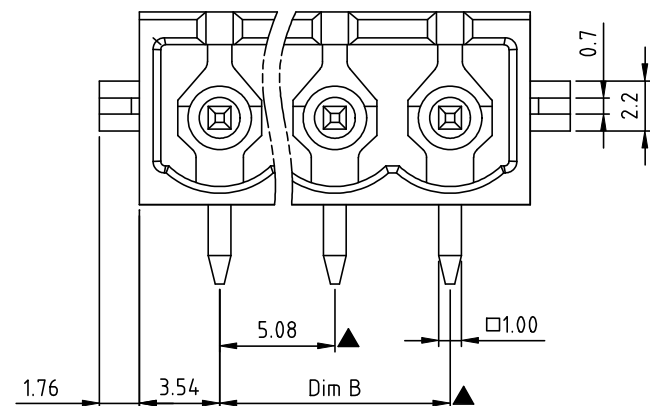

RECOMMENDED PCB LAYOUT

N = Number of poles

Dim A = $N \times 5.08 + 2$ Dim B = $(N - 1) \times 5.08$

	Dim A	Dim B
2-6p	± 0.15	± 0.15
7-12p	± 0.20	± 0.20
13-18p	± 0.30	± 0.30
19-24p	± 0.40	± 0.40

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		03/26-19	Initial release	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ③ Male contact pin: Copper Bright Tin plated over Nickel plated
- Item ⑤ Terminal(housing): Thermoplastic (UL94V-0)

Electrical: cULus /VDE /TUV

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C $\pm$ 5°C/5 Sec
- Safety Approval: cULus VDE TÜV
- Critical dimension: ▲

OQ xx 5 7 x 1 xxxx G

No. OF POLES

02: 2 POLES

:

:

24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)

In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.**Amphenol**
ANYTEK**CUSTOMER COPY**ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 5.08mm Right-angle /Close Series 2p-24p(with latch holder)								
PART NO.		OQxx57x1xxxxG			DWG NO.	80Q07074				
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
			Chen Bo 03/26-19	Chen Bo 03/26-19			UNIT: mm		X. ±0.50	
							SCALE: NONE		X.X ±0.30	
					SHEET: 01/01		REV.: B		X.XX ±0.10	
									X° ±1°	