


RoHS Compliant

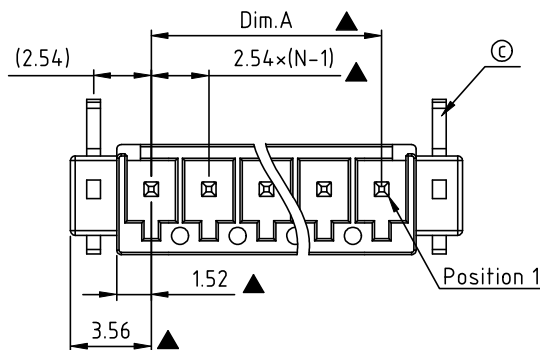

N=Number of poles

Dim A	(N-1)×2.54
Dim B	(N-1)×2.54+7.12
Dim C	(N-1)×2.54+5.08

POLES	Tol	Dim.	Dim.A/B/C
2p-5p			±0.20
6p-16p			±0.25

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		04/01-20	Initial release	Chen Bo
	⚠			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				





- Item ③ Male contact pin: Copper
- Item ④ Terminalhousing: LCP (UL94V-0)
- Item ⑤ Register Pin: Brass ,Bright-tin plated over Nickel plated

Electrical:

cULus

Group B Group C

- Voltage rating: 150V 50V
- Current rating: 6A 6A
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec max
- Critical dimension:
- Safety Approval:

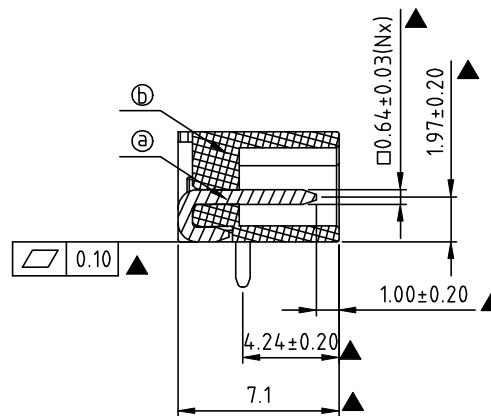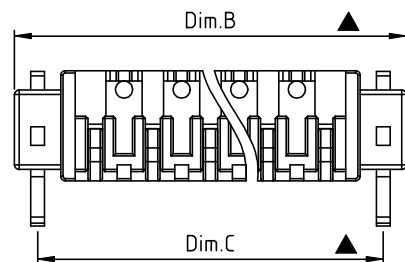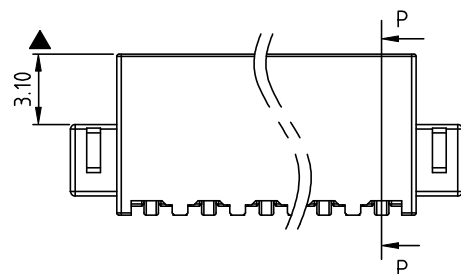

SEC P-P

How to order:

OQ xx CE x x Bxxx G


No. OF POLES
02: 2 POLES
:
16: 16 POLES

COLOR
0: BLACK

C:90° Au G/F plated
D:90° Bright-tin plated

RoHS compliant
(lead<4%)
In copper Alloy

B000: "@" Logo (Standard)
B00A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

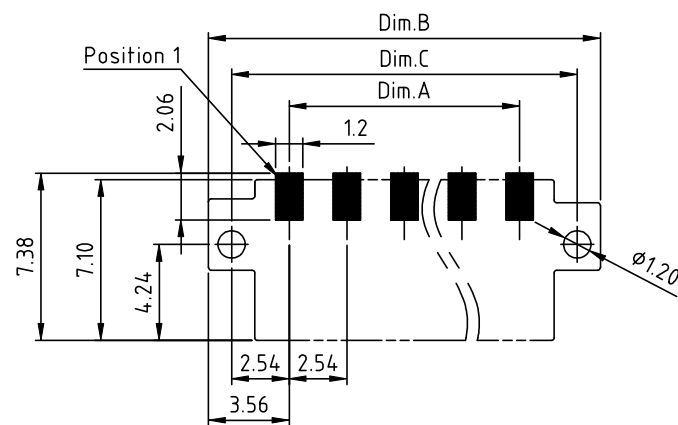

RECOMMENDED PCB LAYOUT

**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 2.54mm Series 2P-16P 90° SMD type(Tape reel packing)				
PART NO.		OQxxCExxBxxxG		DWG NO.	80Q11002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Chen Bo 04/01-20	Chen Bo 04/04-19		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV.: B	X.XX ±0.10
SHEET: 01/01				REV.: B	X° ±1°	