


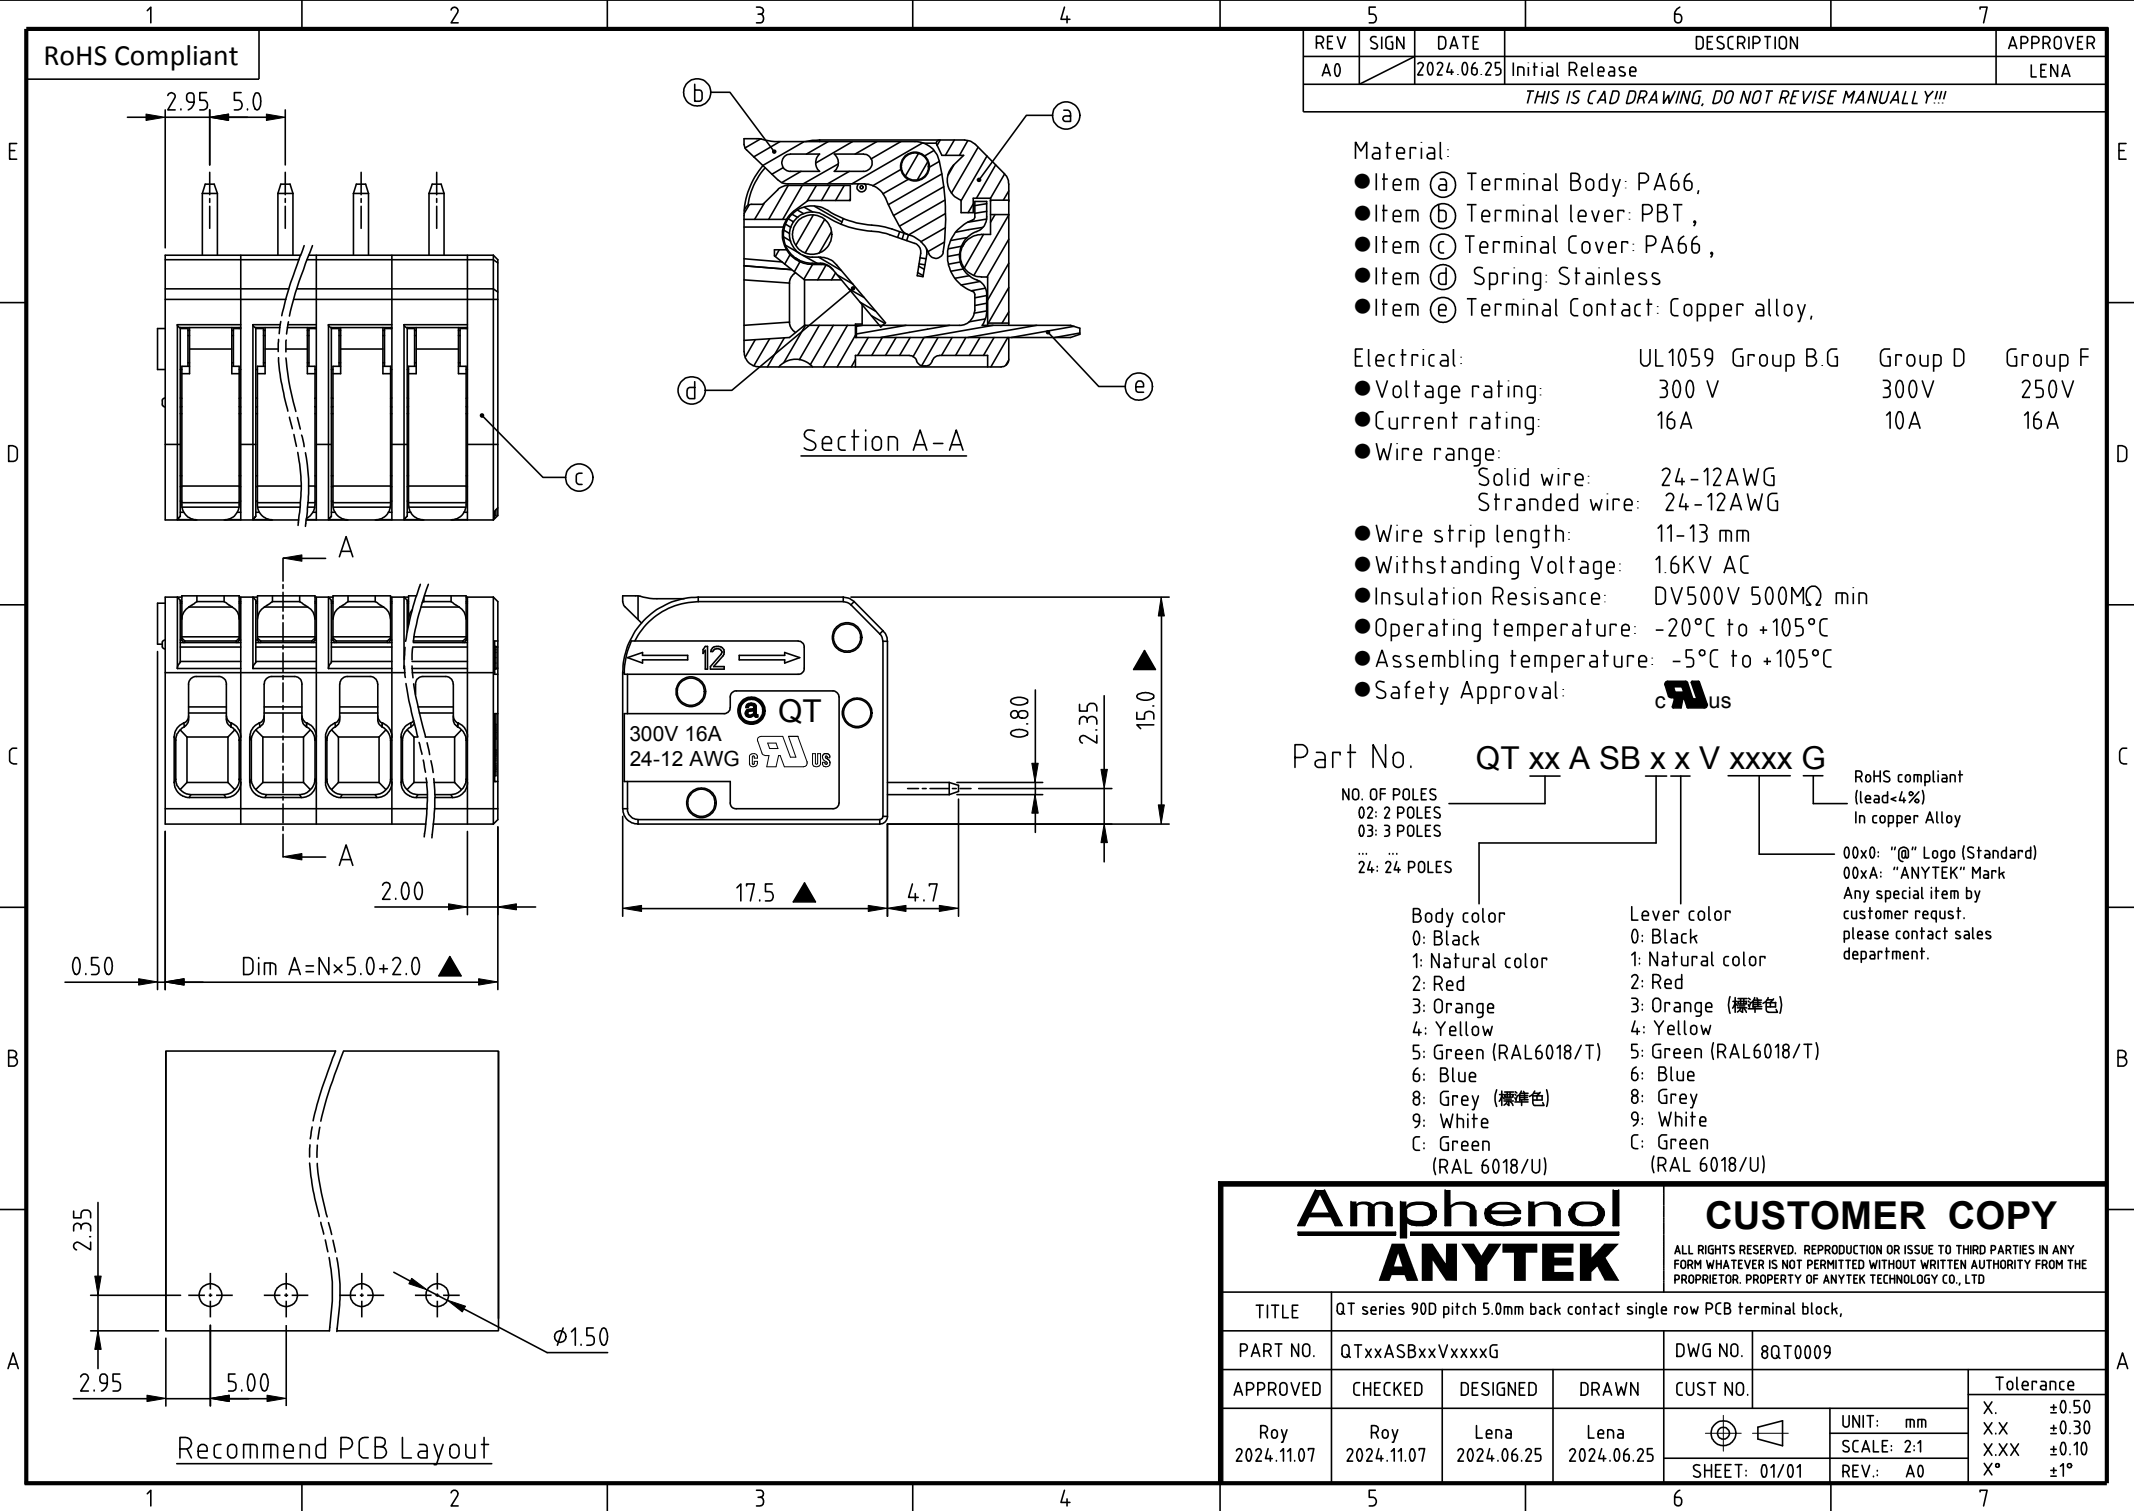

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A0		2024.06.25	Initial Release	LENA

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Material:
- Item ① Terminal Body: PA66,
 - Item ② Terminal lever: PBT ,
 - Item ③ Terminal Cover: PA66 ,
 - Item ④ Spring: Stainless
 - Item ⑤ Terminal Contact: Copper alloy,

- Electrical:
- | | | | |
|--------------------------|------------------|---------|---------|
| UL1059 | Group B.G | Group D | Group F |
| ●Voltage rating: | 300 V | 300V | 250V |
| ●Current rating: | 16A | 10A | 16A |
| ●Wire range: | | | |
| Solid wire: | 24-12AWG | | |
| Stranded wire: | 24-12AWG | | |
| ●Wire strip length: | 11-13 mm | | |
| ●Withstanding Voltage: | 1.6KV AC | | |
| ●Insulation Resisance: | DV500V 500MΩ min | | |
| ●Operating temperature: | -20℃ to +105℃ | | |
| ●Assembling temperature: | -5℃ to +105℃ | | |
| ●Safety Approval: | cULus | | |

Part No. QT xx A SB x x V xxxx G

RoHS compliant (lead<4%) In copper Alloy

00x0: "Q" Logo (Standard)
00xA: "ANYTEK" Mark
Any special item by customer request. please contact sales department.

NO. OF POLES
02: 2 POLES
03: 3 POLES
...
24: 24 POLES

Body color
0: Black
1: Natural color
2: Red
3: Orange
4: Yellow
5: Green (RAL6018/T)
6: Blue
8: Grey (標準色)
9: White
C: Green (RAL 6018/U)

Lever color
0: Black
1: Natural color
2: Red
3: Orange (標準色)
4: Yellow
5: Green (RAL6018/T)
6: Blue
8: Grey
9: White
C: Green (RAL 6018/U)

Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
E	QT series 90D pitch 5.0mm back contact single row PCB terminal block,						
NO.	QTxxASBxxVxxxxG			DWG NO.	8QT0009		
VED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
	Roy 2024.11.07	Lena 2024.06.25	Lena 2024.06.25				UNIT: mm
.07					SCALE: 2:1	X.X ±0.30	
					SHEET: 01/01	REV.: A0	X.XX ±0.10
						X° ±1°	