


SIGN	DATE	DESCRIPTION	APPROVER
△	01.11'06	Standard spec is changed.	xionghaitao
△	10/9'06	VDE wire range changed from 0.75-1.5mm ² to 0.75-4.0mm ²	Steady
△	10/9'06	Solid wire and Stranded wire changed from 12-18 to 12-20	Steady
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- ① Terminal body
(metal housing): Brass Stamping
- ② Terminal screw: Steel Zinc plating "+/-" slot type
- ③ Wire guard: Stainless steel
- ④ Surface of solder tail: Tin plated
- ⑤ Insulator (housing): Thermoplastic (UL94V-0)

- △ Electrical cULus/VDE
 - Voltage rating: 300VAC/450VAC
 - Current rating: 10A/17.5A
 - △ ● Wire range: 0.75-4.0mm²
 - △ ● Solid wire(AWG): 12-20
 - △ ● Stranded wire(AWG): 12-20
 - Torque: 3.5Lb-In/0.4Nm
 - Screw: M3
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - SAFETY APPROVAL DETAIL:  
 - Critical dimension: 

Color		Dim A Length		@ logo		RoHS compliant (lead<4%) Any special item by In copper Alloy customer request, please contact sales department.
02	2 POLES	0	Black (RAL9005)	0	4.4mm	
03	3 POLES	2	Red (RAL3001/D)	0	3.0mm	
...	...	3	Orange(RAL2011/P)			
24	24 POLES	4	Yellow(RAL1018/A)			
		5	Green(RAL6018/T)			
		6	Blue (RAL5015/A)			
		8	Grey(RAL7035/D)			
		C	Green(RAL6018/U)			

N = Number of poles
Dim L=Nx5.0
Dim P=(N-1)x5.0



	Dim L	Dim P
2-6p	±0.20	±0.15
7-12p	±0.25	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		T4-5.0mm 2P-24P					
PART NO.		T4xx04xxxxxxG			DWG NO.	8T40001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Guoxue 2013.11.25	Tason 2010.04.16		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
				SHEET: 01/01	REV.: E	X°	±1°

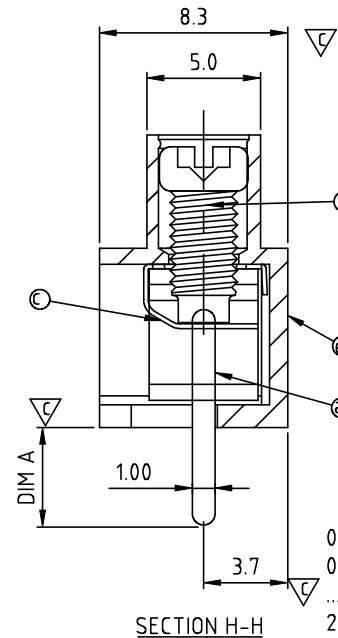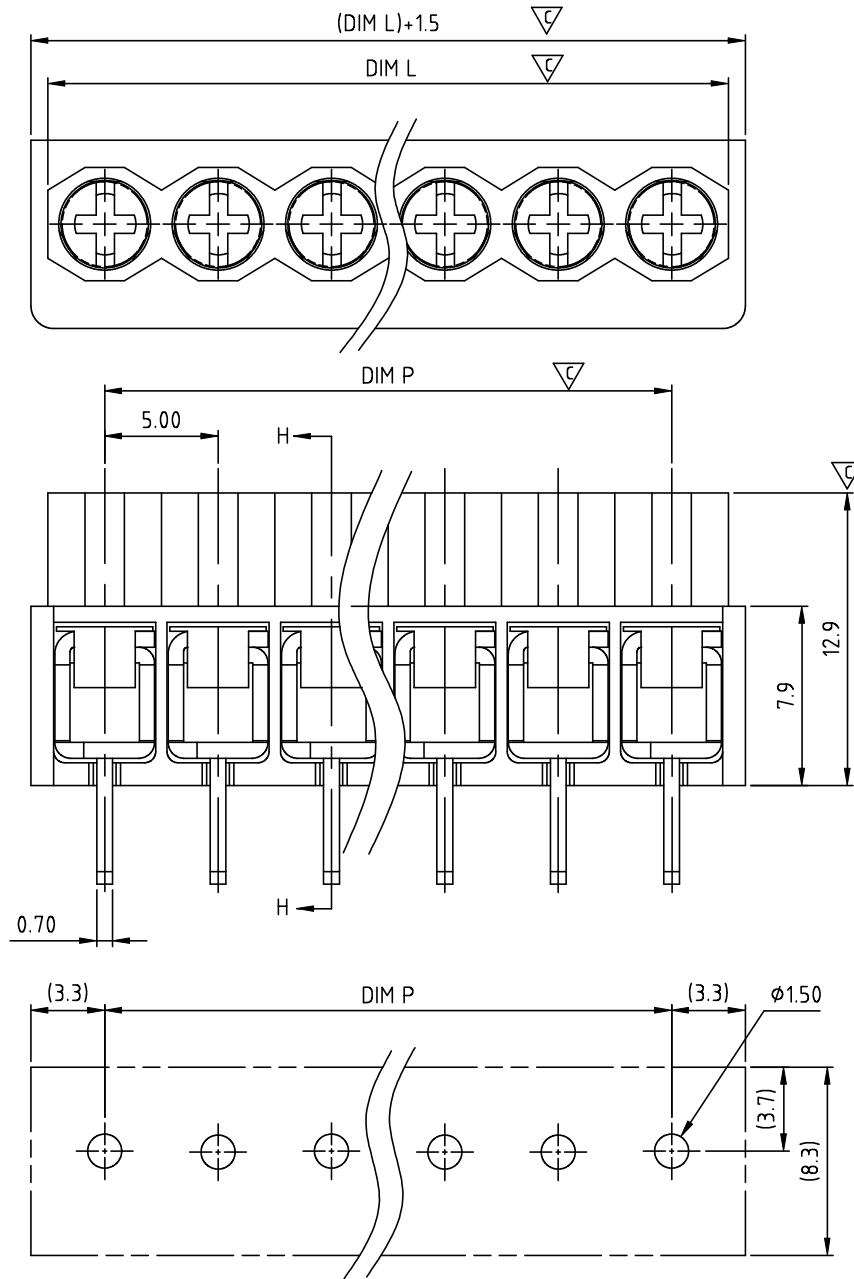

RECOMMENDED P.C.B. LAYOUT