
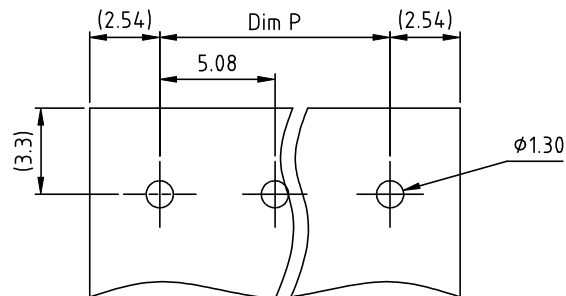
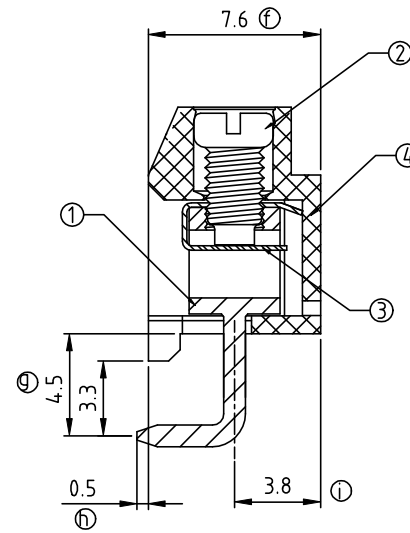
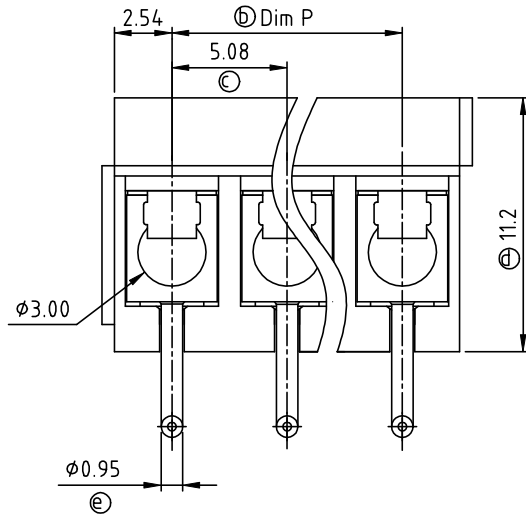


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

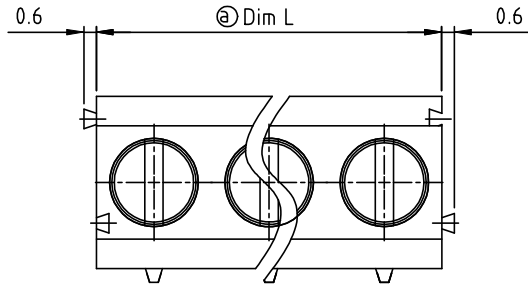

N = Number of poles
Dim L = N x 5.08
Dim P = (N - 1) x 5.08

	Dim L	Dim P
2-6p	±0.15	±0.15
7-12p	±0.30	±0.30
13-18p	±0.35	±0.35
19-24p	±0.40	±0.40

Material:

- Item ① Terminal body(metal housing): Brass(CuZn),Tin plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Wire guard: Stainless steel
- Item ④ Insulator (housing): Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Toque(Lb-In): 3.2
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ±10°C/5 Sec
- Safety Approval: 

T9 xx 21 x 0 xxxx G

	Color		
02 2 CONTACTS	0 Black (RAL9005)	0000: "@" Logo	RoHS
03 3 CONTACTS	5 Green(RAL6018/T)	000A: "ANYTEK" Logo	Pb<40,000ppm
... ..	6 Blue (RAL5015/A)	Any special item by	
24 24 CONTACTS	8 Grey(RAL7035/D)	customer request.	
	C Green(RAL 6018/U)	please contact sales	
		department.	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	T9 - 5.08mm Series "-"						
PART NO.	T9xx21x0xxxxG			DWG NO.	8T90002		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Tason 2010.11.29	Tason 2010.11.29		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
				SHEET: 01/01		REV: B	X.XX ±0.10
							X° ±1°