

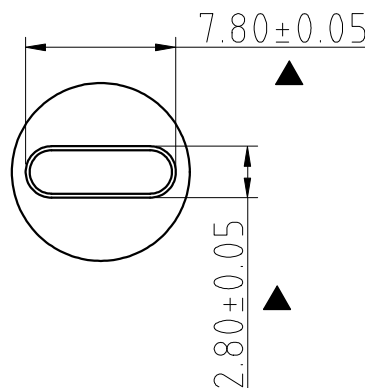




RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	2024.11.28		Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

- Technical Specification:
1. Material: Brass, Matte Tin plated.(Ni50u"(Min)+ Sn160u"(Min)+Mylar
 2. Current: 70A.
 3. Torque: 2.2N.m(Max)
 4. Operating temperature: -50°C to +150°C
 5. Mark "▲" is the Critical dimension.

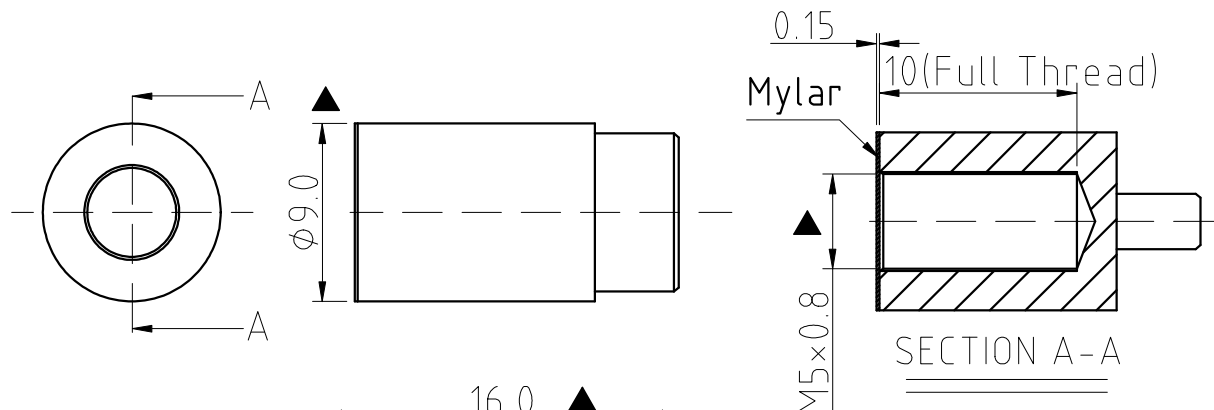

PCB Hole Size

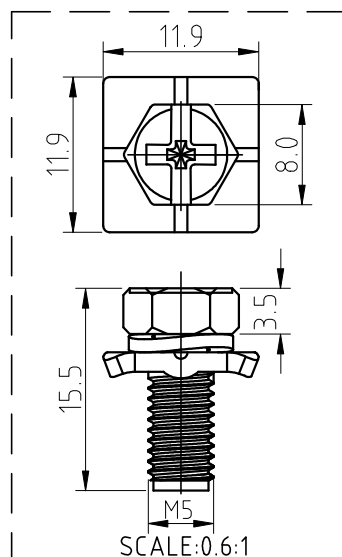

Torque test screw model
(Ni plated)

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM
WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR.
PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TB Nut M5x12mm H- Through Hole (Mylar+Tape Reel Packing)						
PART NO.	TB000000B008G			DWG NO.	8TB0032		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Guoxue 2024.11.28	Guoxue 2024.11.28		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X*	±1°
				SHEET: 01/01	REV.: B		