


RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	2024.11.28		Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Technical Specification:

1. Material: Brass,Matte Tin plated.(Ni50u"(Min)+ Sn160u"(Min)+Mylar
2. Current: 70A.
3. Torque: 2.2N.m(Max)
- 4.Operating temperature: -50°C to +150°C
5. Mark"▲" is the Critical dimension.

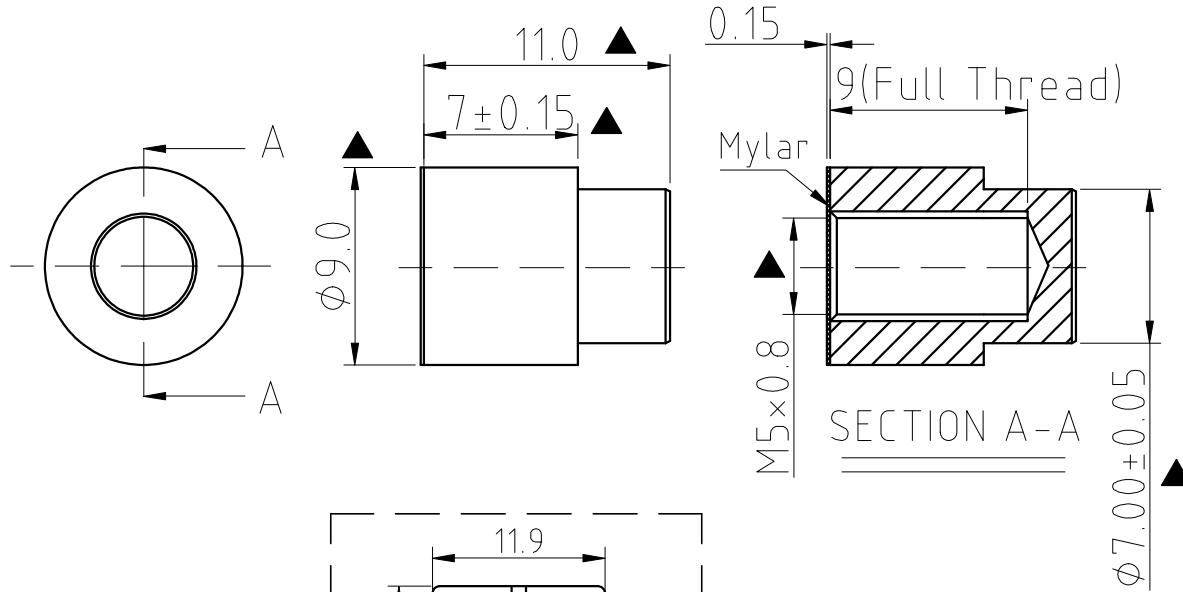

PCB Hole Size
 $\phi 7.20 \pm 0.05$

Torque test screw model
(Ni plated)

Amphenol ANYTEK				CUSTOMER COPY			
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	TB Nut M5x7mm H- Through Hole (Mylar+Tape Reel Packing)						
PART NO.	TB000000B010G			DWG NO.	8TB0033		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2024.11.28	Guoxue 2024.11.28		UNIT: mm SCALE: NONE		X. X.X X.XX X°
				SHEET: 01/01	REV: B		±0.50 ±0.30 ±0.10 ±1°