
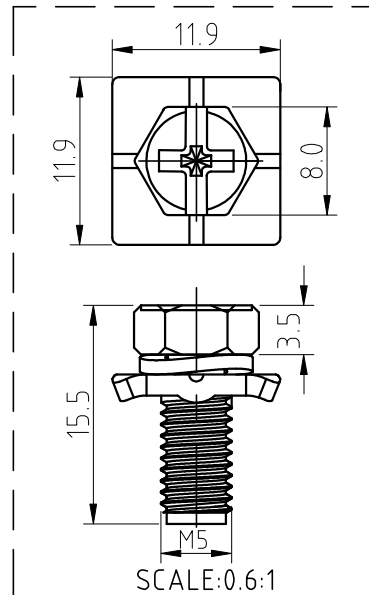
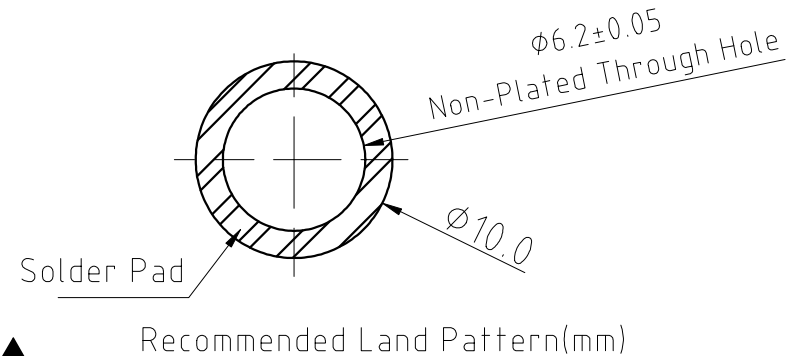
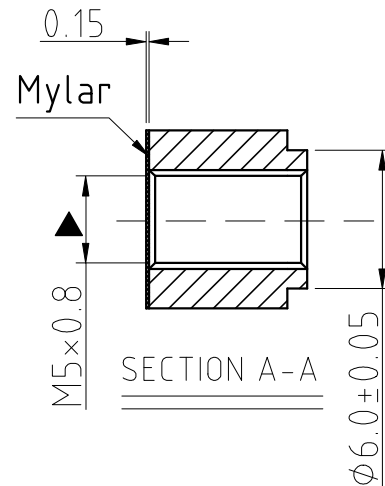


RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	2024.11.28		Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Technical Specification:

1. Material: Brass,Matte Tin plated.(Ni50u"(Min)+ Sn160u"(Min)+Mylar
2. Current: 70A.
3. Torque: 2.2N.m(Max)
- 4.Operating temperature: -50℃ to +150℃
5. Mark"▲" is the Critical dimension.

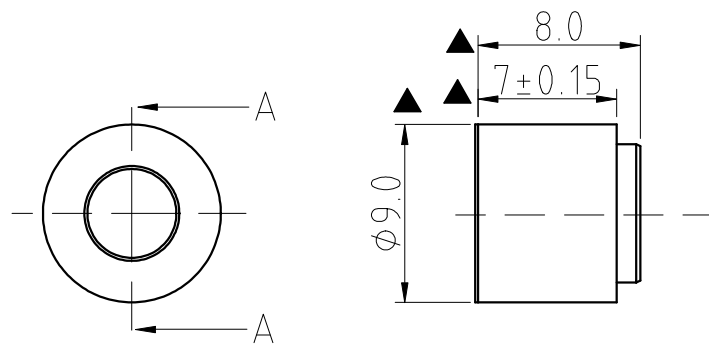

Torque test screw model
(Ni plated)

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM
WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR.
PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TB Nut M5×7mm H- SMT (Mylar+Tape Reel Packing)				DWG NO.	8TB0034	
PART NO.	TB000000B009G				CUST NO.		
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance	
		Guoxue 2024.11.28	Guoxue 2024.11.28			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
							X.XX ±0.10
							X° ±1°
						SHEET: 01/01	REV.: B