

RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	08/25`22	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- ① Clamp : Brass , Ni plated
- ② Terminal screw: Steel Zinc plating “-” slot type.
- ③ Wire guard solder pin : Brass ,Tin plated
- ④ Terminal housing : Thermoplastic (UL94V-0)
- ⑤ Cover : Thermoplastic (UL94V-0)

- Electrical: cULus
- Voltage rating: 600V
 - Current rating: 65A
 - Wire range:
 - Solid wire(AWG): 6-22
 - Stranded wire(AWG): 6-22
 - Torque: 8.7 Lb-In.
 - Screw: M4
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 2.2KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: 
 - Critical dimension: ▲

V4 xx 0 1 x 0 xxxx G




- 02 2 POLES
03 3 POLES
04 4 POLES
05 5 POLES

Color

- 0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request.
please contact sales
department.

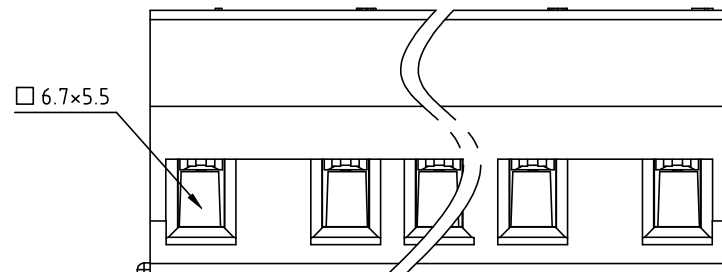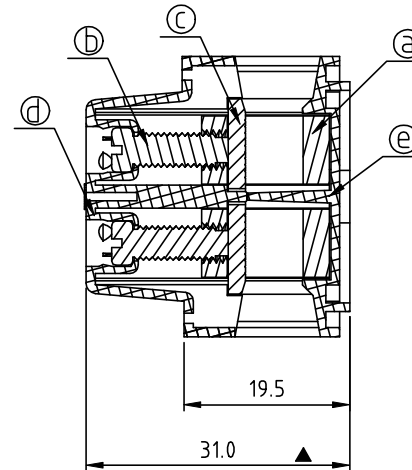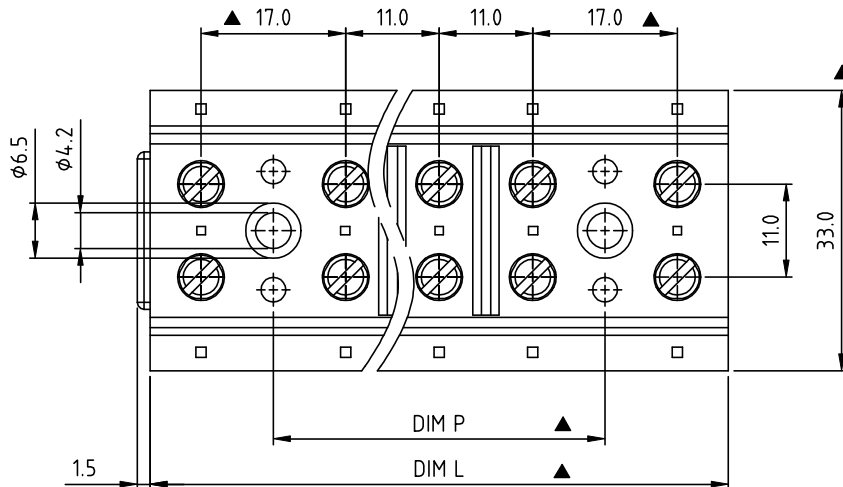

Ploes	DIM L	DIM P	Tol.
2ploes	29.0	17.0	±0.30
3ploes	46.0		
4ploes	57.0	28.0	
5ploes	68.0	39.0	

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	V4 Series (2P-5P)							
PART NO.	V4xx01x0xxxxG			DWG NO.	8V40023			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Guoxue 2022.08.25	Guoxue 2022.08.25		UNIT: mm		X.	±0.50
					SCALE: NONE		X.X	±0.30
					SHEET: 01/01		X.XX	±0.10
					REV.: B		X°	±1°