
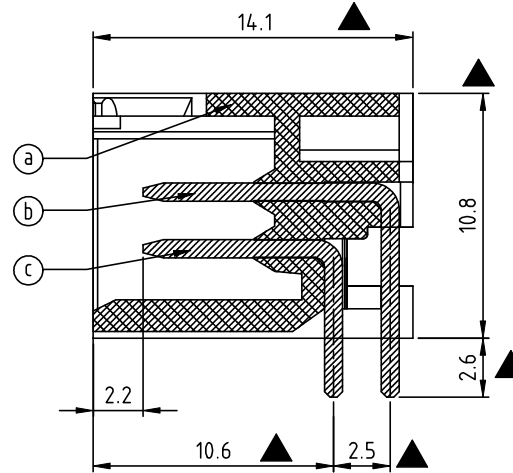
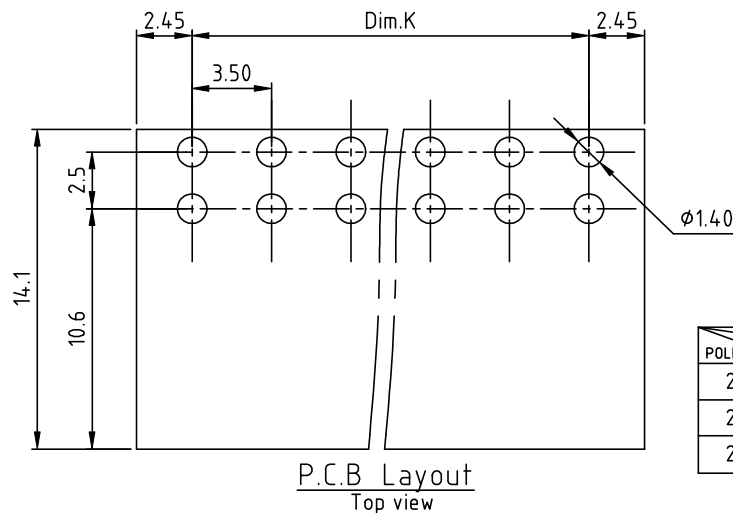
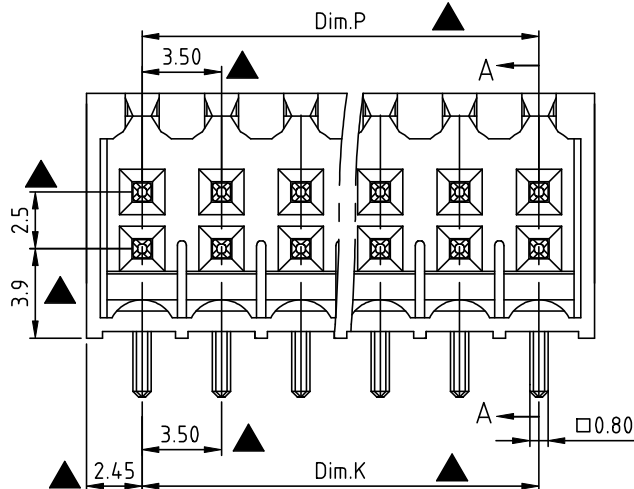


RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	10/15 19	The first release	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

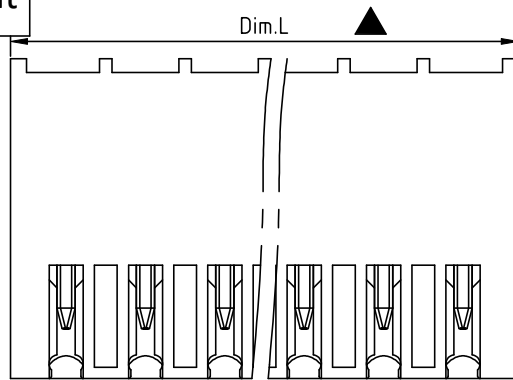

SECTION A-A

Dim.L=(N/2-1)×3.5+4.9
Dim.P=(N/2-1)×3.5
Dim.K=(N/2-1)×3.5

N=Number of poles

POLES	Dim. Tol	Dim.L	Dim.P & Dim.K
2x2p-2x6p		±0.15	±0.10
2x7p-2x12p		±0.25	±0.20
2x13p-2x16p		±0.35	±0.30

Material:

- Item ③ Terminal housing: LCP (UL94V-0)
- Item ④ Male contact long pin: Brass, Tin plated
- Item ⑤ Male contact short pin: Brass, Tin plated

Electrical:

- cULus
- Voltage rating: 150V
- Current rating: 7 A
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +130°C
- Reflow Soldering temperature: 260°C/10 Sec Max.
- Safety Approval: cULus
- Critical dimension: ▲

V X xx 1 1 x B Bxxx G

RoHS compliant (lead<4%)
In copper Alloy

NO of Poles
04 2x2 Poles
06 3x2 Poles
...
32 16x2 Poles

COLOR
0 Black (RAL9005)
1 Natural color

B000 Standard @ Logo
B00A Standard ANY Logo
Any special item by customer request, please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VX 3.5mm Series Close Right-angle THR (Tape reel packing)			
PART NO.	VXxx11xBBxxxG			DWG NO. 8VX0113
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Guoxue 2019.10.15	Guoxue 2019.10.15	
SHEET: 01/01				UNIT: mm SCALE: NONE REV.: B
				Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°