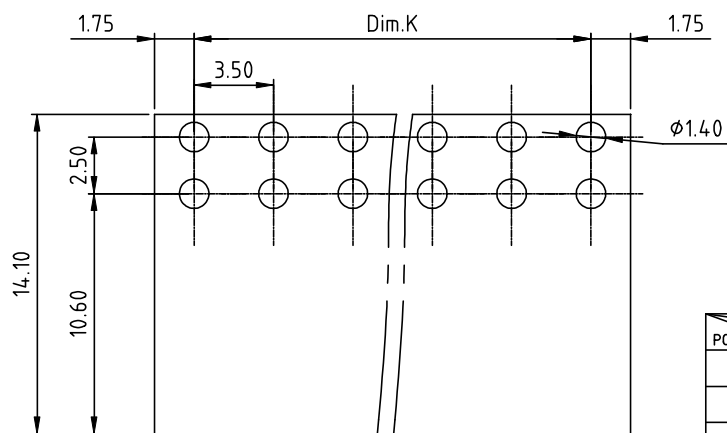
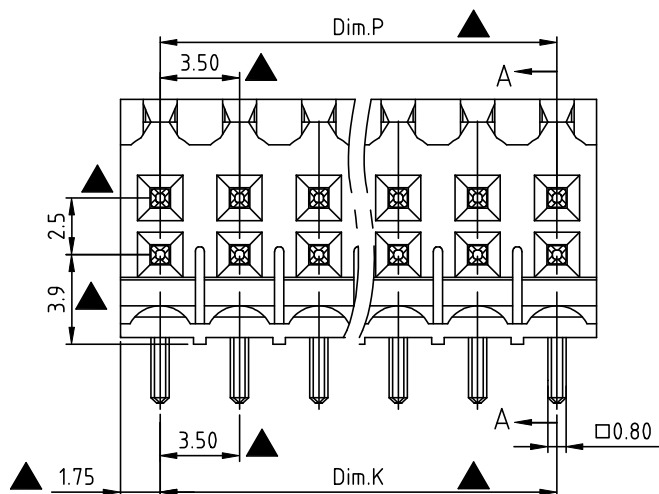
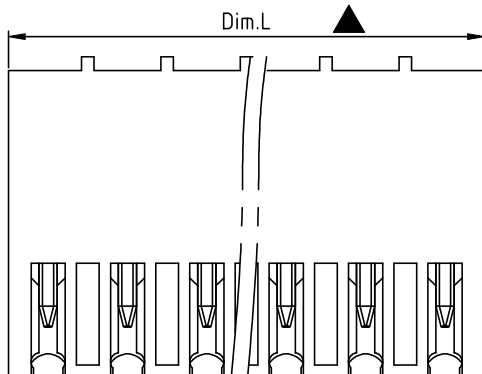



RoHS Compliant

P.C.B Layout
Top view

Dim.L=N/2×3.5
Dim.P=(N/2-1)×3.5
Dim.K=(N/2-1)×3.5

N=Number of poles

POLES	Dim. Tol	Dim.L	Dim.P & Dim.K
2x2p-2x6p		±0.15	±0.10
2x7p-2x12p		±0.25	±0.20
2x13p-2x16p		±0.35	±0.30

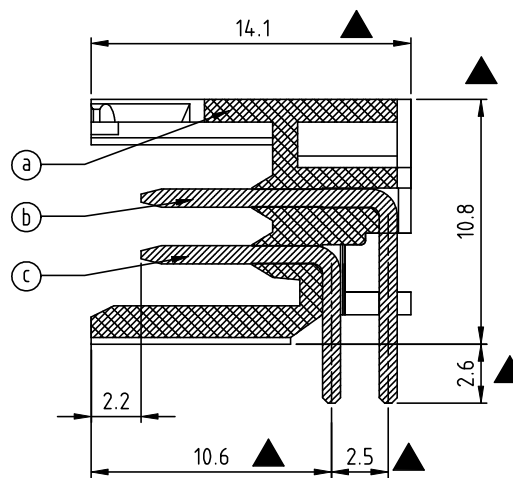

SECTION A-A

Material:

- Item ③ Terminal housing: LCP (UL94V-0)
- Item ④ Male contact long pin: Brass, Tin plated
- Item ⑤ Male contact short pin: Brass, Tin plated

Electrical: cULus

- Voltage rating: 150V
- Current rating: 7 A
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +130°C
- Reflow Soldering temperature: 260°C/10 Sec Max.
- Safety Approval: 
- Critical dimension: 


NO. of Poles
04 2x2 Poles
06 3x2 Poles
...
32 16x2 Poles

V X xx 1 0 x B Bxxx G
COLOR
0 Black (RAL9005)

RoHS compliant
(lead<4%)
In copper Alloy
B000 Standard @ Logo
B00A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

Amphenol
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VX 3.5mm Series Open Right-angle THR (Tape reel packing)					
PART NO.	VXxx10xBBxxxG			DWG NO.	8VX0118		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2019.10.17	Guoxue 2019.10.17		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X°	±1°
				SHEET: 01/01		REV.: B	