





SIGN	DATE	DESCRIPTION	APPROVER
△	01/18/07	Soldering temperature changed from 245° to 250°	Tason
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item 1 Insulator bady : Thermoplastic (UL 94V-0)
- Item 2 Terminal bady(house): Brass , Ni plated
- Item 3 Contacts :Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating “-” slot type

Electrical

- Voltage rating: 150VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24
- Torque: 1.7Lb-In
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

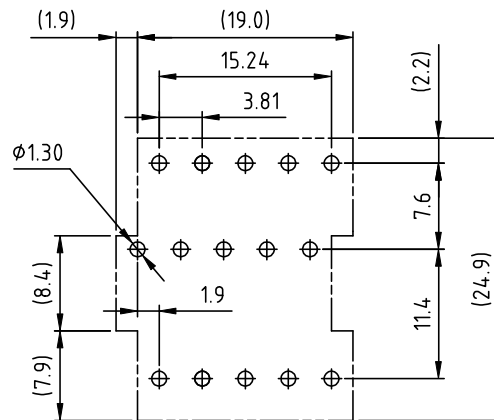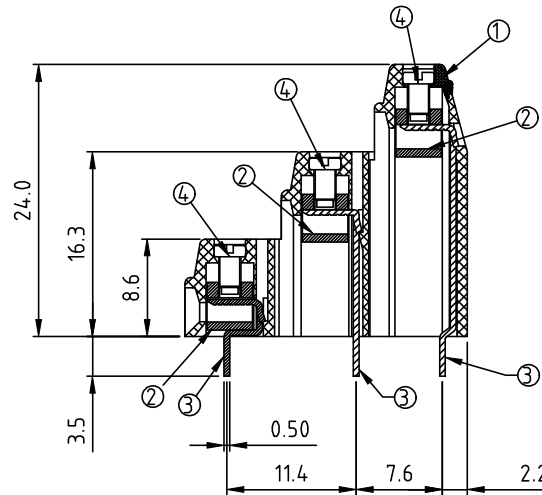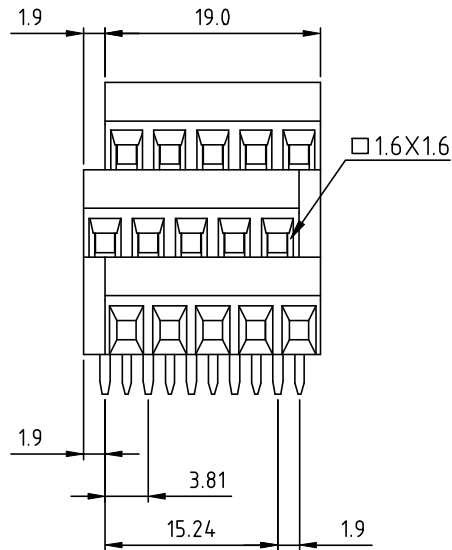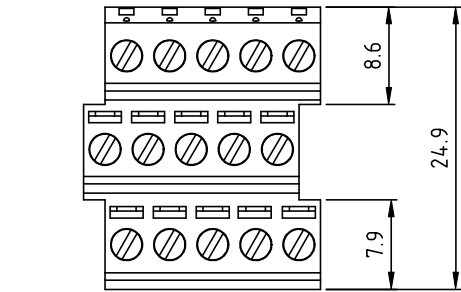

P.C.B LAYOUT

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YA 3.81 Series 15p(5p×3)						
PART NO.	YA1521x00000G				DWG NO.	8YA0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		熊海霖 2007.01.25	熊海霖 2007.01.25		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
					REV.: C	X.XX ±0.10	
SHEET: 01/01						X° ±1°	