
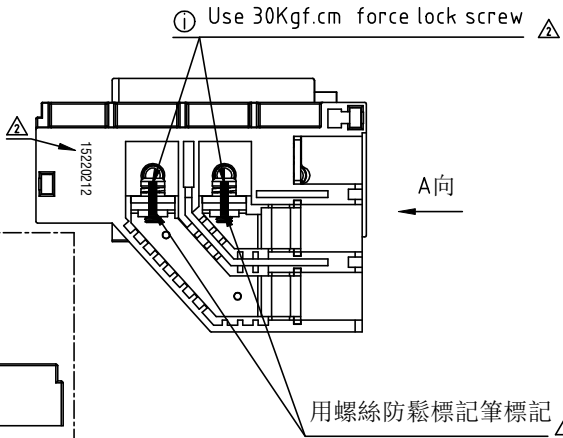
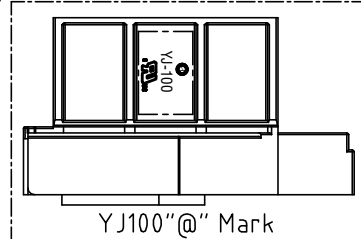
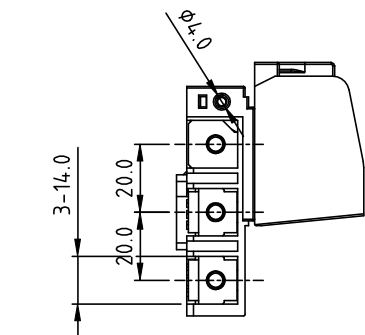
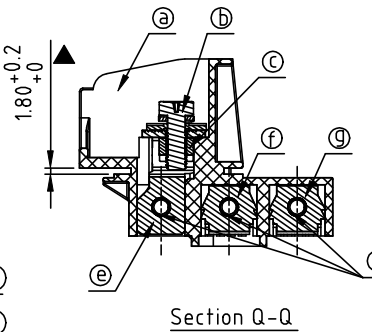
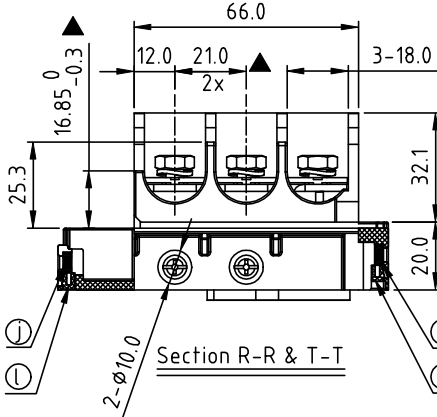

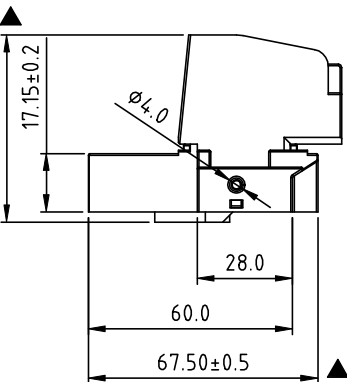
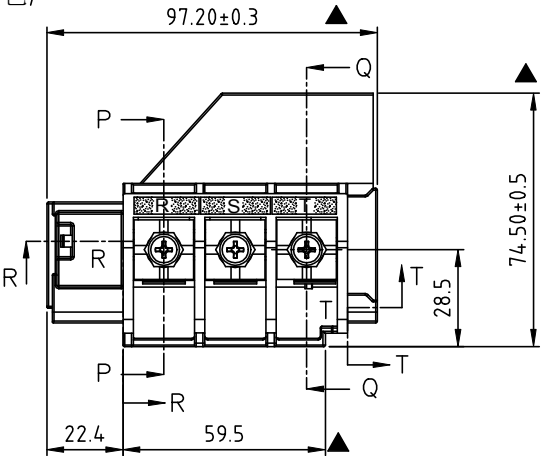


Text color(印字顏色) : 59.5x5.0mm區域底色為PANTONG109C(黃色)
R S T 為縷空字

Font(字體) : Arial
Text high(字高) : 4.0mm,字體線條寬度: 0.50mm

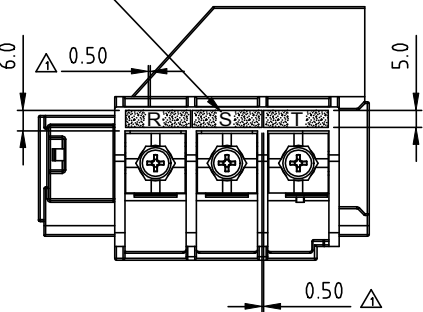


REV	SIGN	DATE	DESCRIPTION	APPROVER
B		03/31`17	Initial release	Chen Bo
C	△	10/11`17	Change the print and add the note	Chen Bo
	△	11/23`17	Add the torque force	Chen Bo
D	△	04/04`18	Change the plating specification	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Terminal housing: PBT (UL94V-0)
- Item ② Terminal screws with washer: Steel, Ni plating, M6.0
- Item ③ Terminal nut: Steel, Zinc plating, M6.0
- △● Item ④ Female contact -01: Copper ,Ni plating
- △● Item ⑤ Female contact -02: Copper ,Ni plating
- △● Item ⑥ Female contact -03: Copper ,Ni plating
- △● Item ⑦ Female contact -04: Copper ,Ni plating
- Item ⑧ Terminal nut: Steel, Zinc plating, M5.0
- Item ⑨ Terminal screws with washer: Steel, Ni plating, M5.0
- △● Item ⑩ Terminal nut: Steel, Zinc plating, M3.0 12Kgf.cm
- Item ⑪ Terminal nut: Steel, Zinc plating, M5.0
- Item ⑫ Terminal cover: PBT (UL94V-0)

Electrical:

- cULus (UL1059)
- Voltage rating: 600 V
- Current rating: 140 A
- Screw: M6
- △● Screw Torque : 80Kgf.cm
- Applicable wire(AWG): 8~1/0
- Withstanding Voltage: 2.2 KV
- Operating temperature: -40℃ to +115℃
- Safety Approval: cULus
- Critical dimension: △

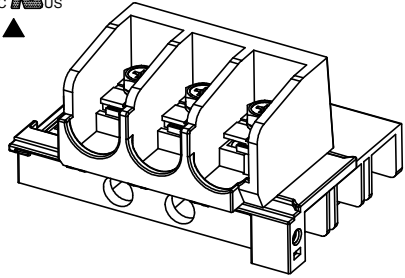

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	YJ-100 Power terminal (140A) Print: R S T						
PART NO.	YJ10003310HCG			DWG NO.	8YJ0003-100		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 04/04-18	Chen Bo 02/24`16		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
				SHEET: 01/01	REV: D	X.XX ±0.10	
						X° ±1°	