
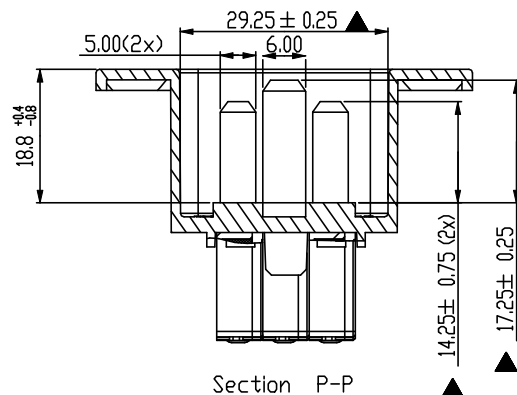
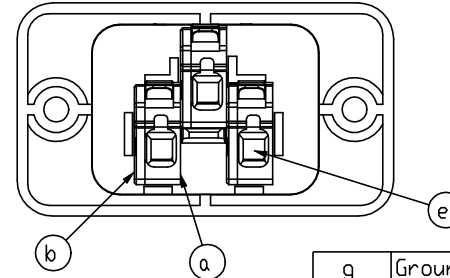
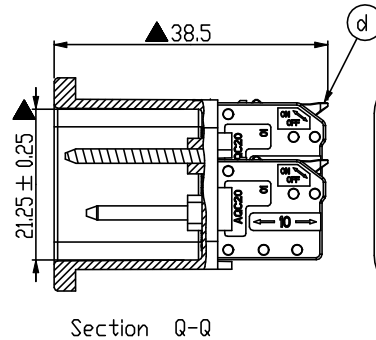
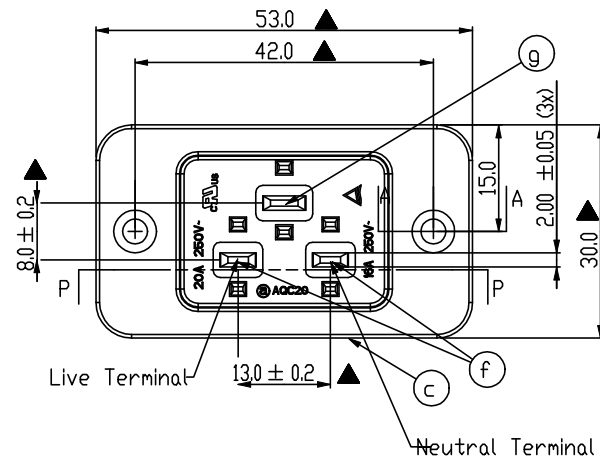


ROHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A0	-	2026.03.19	The first release	Jesse
THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!				

Notes:

- Voltage rating: 250VAC
 - Current rating: 20A
 - Wire range:
 - Solid wire 16-12 AWG
 - Stranded wire 16-12 AWG
 - Wire strip length: 9-10mm
 - Withstanding Voltage: 1.5KVAC/1min
 - Insulation resistance : DC500V/500 Ω
 - Operating temperature: -20°C to +70°C
(Including temperature rise caused by application of current)
 - SAFETY APPROVAL:  
 - Critical dimension 
- UL60320-1
IEC/EN 60320-1
250VAC
16A
1.5mm²-2.5mm²

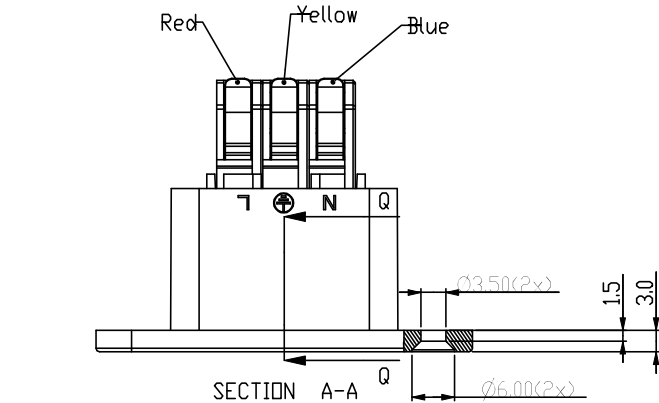

g	Ground Terminal	Copper alloy, Ni 50u*Min,Gold flash Plated	1
f	Live/Neutral Terminal	Copper alloy, Ni 50u*Min,Gold flash Plated	2
e	Spring clamp	Stainless steel	3
d	Lever	PA66 (UL 94V-0)	3
c	Front Body	PA66 (UL 94V-0),Black	1
b	Cover	PA66 (UL 94V-0),Black	3
a	Back Body	PA66 (UL 94V-0),Black	3
ITEMS	PART NAME	Description	QTY

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE: AQC20 Socket B-Type		DWG NO. 8AQC0002-20	
PART NO. AQC201000CA00G	DESIGNED Jesse	DATE 2026.03.19	2025. 11.17
APPROVED	CHECKED	DESIGNED	DRAWN
		Jesse	Jesse
SHEET: 1 / 1		UNIT: mm	X. 0.5
		SCALE: 1.000	X.X 0.3
		REV: A0	X.XX 0.1
			X- 1-