



RoHS Compliant

Rev	SIGN	DATE	DESCRIPTION	APPROVER
B	—	08/24/23	First issue	Vincent
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

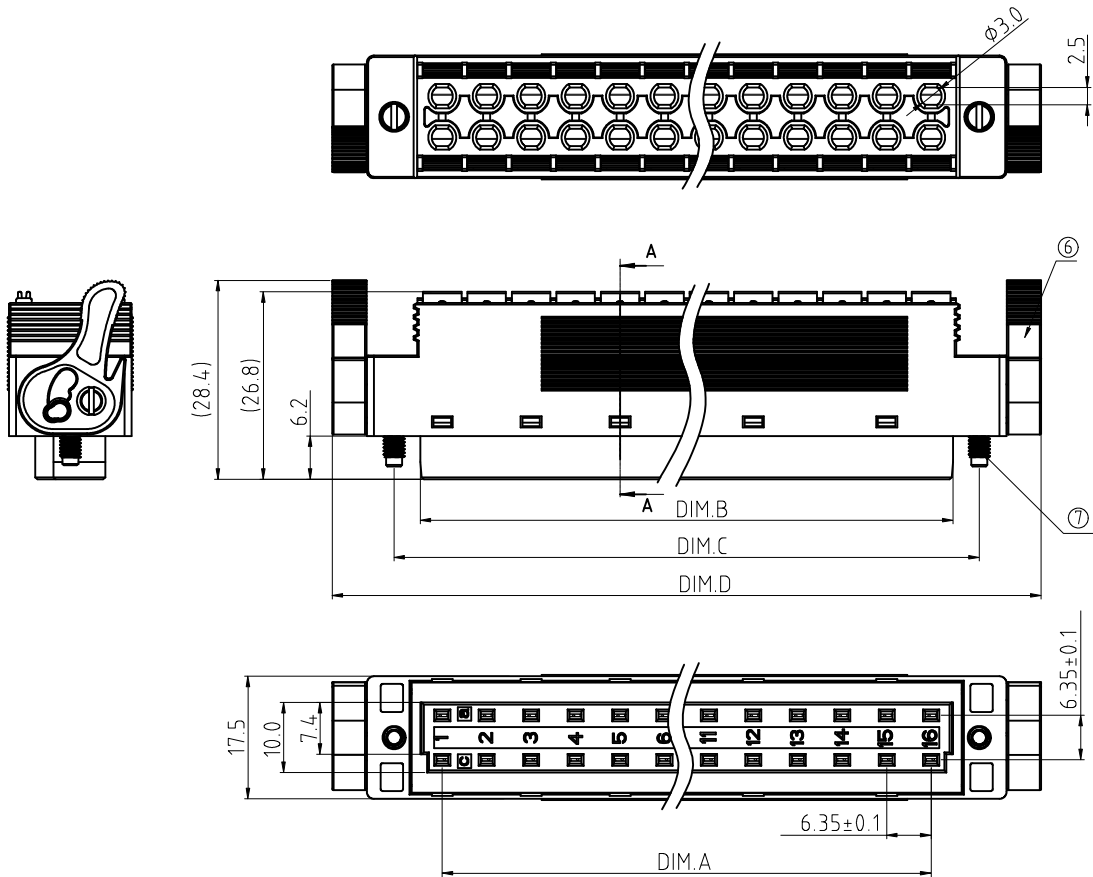

- Note :
- Rated Voltage: 300V
 - Rated Current: 6A
 - Solid wire(AWG): 20-16
 - Stranded wire(AWG): 20-16
 - Wire strip length: 12mm
 - Withstanding Voltage: 2.5KV
 - Operating temperature: -40°C to +115°C
 - Reference dimension: (×)

⑦	Screw	M3, Steel Zinc plated	2
⑥	Hand lever	Thermoplastic (UL94V-0), Orange	2
⑤	Bottom housing	Thermoplastic (UL94V-0)	1
④	Terminal	PhBz Tin Plated.	N
③	Spring clamp	Stainless steel	N
②	Top housing	Thermoplastic (UL94V-0)	1
①	Terminal lever	Thermoplastic (UL94V-0), Orange	N
ITEM	PART NAME	DESCRIPTION	QTY

E5 XX 0 B X 0 XXXX G

No. of poles
16: 2x8 poles
18: 2x9 poles
20: 2x10 poles
22: 2x11 poles
24: 2x12 poles
28: 2x14 poles
32: 2x16 poles

BODY COLOR
0: Black(RAL9005)
2: Red(RAL3001/D)
3: Orange(RAL2011/P)
4: Yellow(RAL1018/A)
5: Green(RAL6018/T)
6: Blue(RAL5015/A)
8: Grey(RAL7004/P)
9: White(RAL1102)

RoHS
Pb<40,000ppm
0000 Standard @ Logo
000A Standard ANY Logo
ZLX-001 Standard ZLX Logo
Any special item by
customer request,
please contact sales
department.

N=numbers of poles
DIM. A=(N/2-1)×6.35
DIM. B=(N/2-1)×6.35+6.25
DIM. C=(N/2-1)×6.35+13.75
DIM. D=(N/2-1)×6.35+31.45

Poles	Tolerance	
	DIM. A&B&C&D	
2x8-2X10	±0.3	
2X11-2X12	±0.4	
2X14	±0.4	
2X16	±0.4	

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	E5 6.35 2X8-2X12/2X14/2X16 釋放桿, 免鎖螺絲式			
PART NO.	E5XX0BX0XXXXG		DWG NO.	8E50107
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Vincent 2023.08.24	Vincent 2023.08.24	
SHEET: 01/01				Tolerance
				X. ±0.50
				X.X ±0.30
				X.XX ±0.10
				X* ±1°