
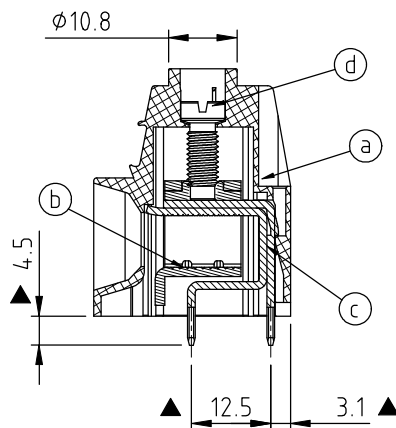
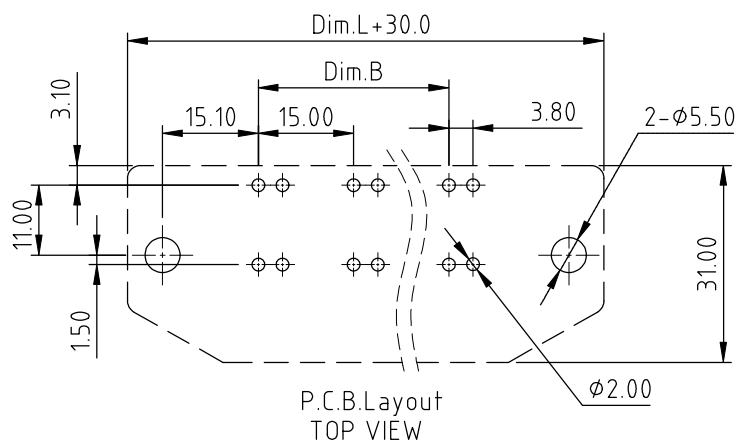
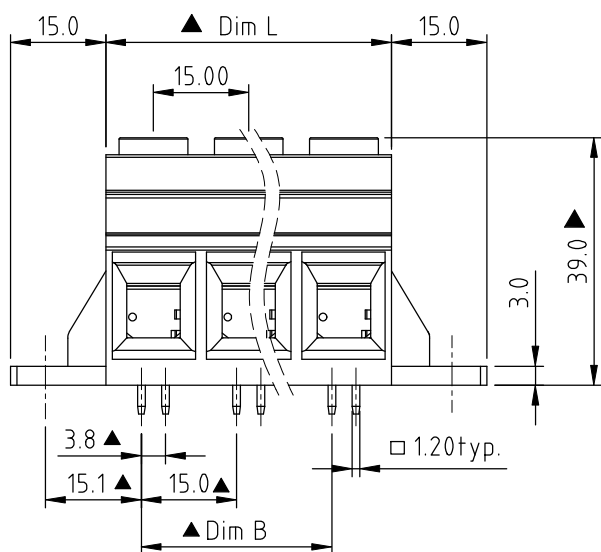


RoHS Compliant

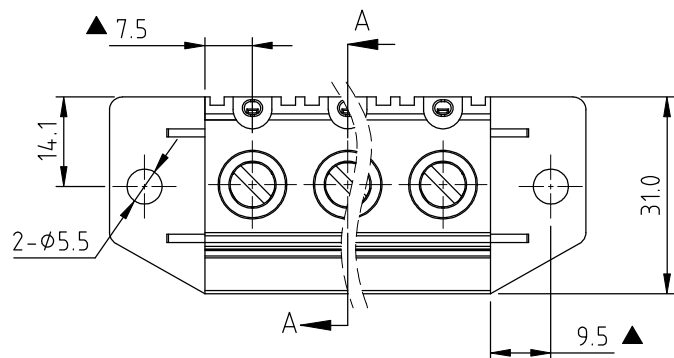

SECTION A-A

DIMENSION L & B

Dim L	N×15.0
Dim B	(N-1)×15.0

N= NUMBER OF CONCATS

Poles	Tolerance
2P-3P	±0.30
4P-5P	±0.50
6P-10P	±0.80

REV	SIGN	DATE	DESCRIPTION	APPROVER
G	—	2022.03.29	ECN202203001	
H	△	2022.04.26	Add the "TUV" Mark	

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!

Material:

- Item (a) Terminal housing :Thermoplastic (UL 94V-0)
- Item (b) Clamp : Steel Stamping , Zinc plated
- Item (c) Wire guard solder pin : Copper , Tin plated
- Item (d) Terminal screw: Zinc plating"-slot type

Electrical	cULus	TUV(IEC /EN 60947-7-4)
•Voltage rating:	600V	1000VAC&DC (III/3)
•Current rating:	125A	125A
•Wire range:		0.5mm ² -35mm ²
Solid wire(AWG):	2-20	
Stranded wire(AWG):	2-20	
•Torque(Lb-In):	36.5	4.2N.m
•Screw:	M5	
•Wire strip length:	16-19mm	
•Withstanding Voltage:	2.2KV	
•Rated impulse withstand voltage:		8000V
•Operating temperature:	-40° C to +115° C	
•Soldering temperature:	260±5° C/5 Sec	
•Safety Approval:	cULus	△ △
•Critical dimension:		▲

EI xx C 1 x 3 1 xxx G

02 2 POLES
03 3 POLES
...
10 10 POLES

COLOR
0 Black
2. Red
3 Orange
4 Yellow
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White
C Green(RAL 6018/U)

000:"@Logo (Standard)
00A:"ANYTEK"Logo
Any special item by
customer request,
please contact sales
department.

RoHS compliant
(lead<4%)
In copper Alloy

**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	EI 15.0 Series (Double-handed) , "-Slotted Screw						
PART NO.	ElxxC1x31xxxG			DWG NO.	8EI0006		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Lena 2022 04 26	Lena 2022 04 26		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
					SHEET: 01/01	REV: H	X.XX
						X°	±1°