
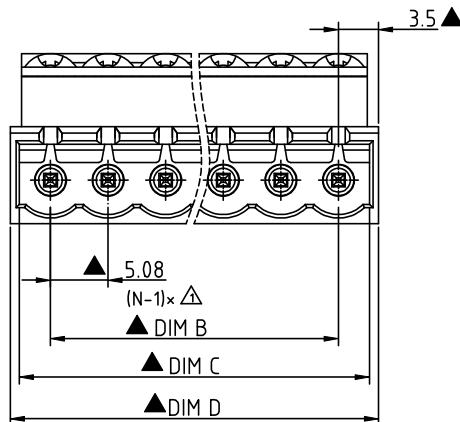
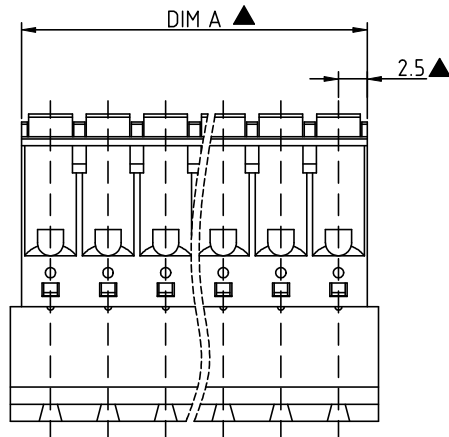


RoHS Compliance

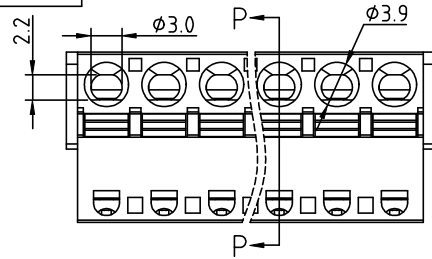


Dimension

DIM A	Nx5.08
DIM B	(N-1)x5.08
DIM C	Nx5.08+0.4
DIM D	Nx5.08+2.0

N=Number of poles

POLES	TOL
2p-6p	±0.15
7p-12p	±0.20
13p-16p	±0.30
17p-24p	±0.40

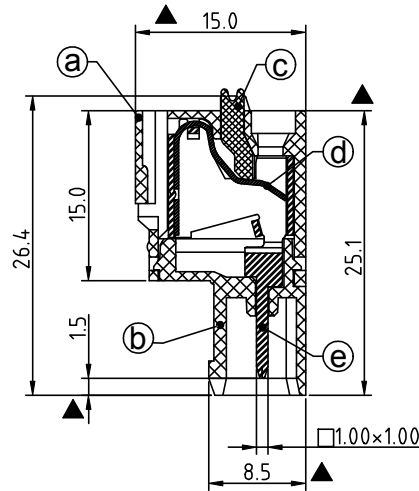

SECTION P-P

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	-	06/22'13	The first release	Jacky
C	△	06/05'23	Update the drawing	Petter

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item① Terminal body:Thermoplastic (UL94V-0) △
- Item② Terminal body:Thermoplastic (UL94V-0) △
- Item③ Terminal lever:Thermoplastic (UL94V-0)Orange RAL2011/P △
- Item④ Wire guard:Stainless Steel
- Item⑤ Male contact pin :PhBz (CuSn)Tin plated .

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Solid wire(AWG): 12-26
- Stranded wire(AWG): 12-26
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus
- Critical dimension: ▲

cULus

H5 xx 50 x 0 xxxx G

02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.
RoHS compliant (lead<4%) In copper Alloy

0: BLACK
△ 3: Orange(RAL2011/P)
5: GREEN (RAL 6018/T)
6: BLUE
8: GREY (RAL 7035/D)
C: GREEN (RAL 6018/U)

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	H5 5.08 Series (2P-24P) Without flange						
PART NO.	H5xx50x0xxxxG			DWG NO.	8H504.01		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Petter 2023.06.05	Petter 2023.06.05		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV.: C	X.XX	±0.10
						X*	±1"