


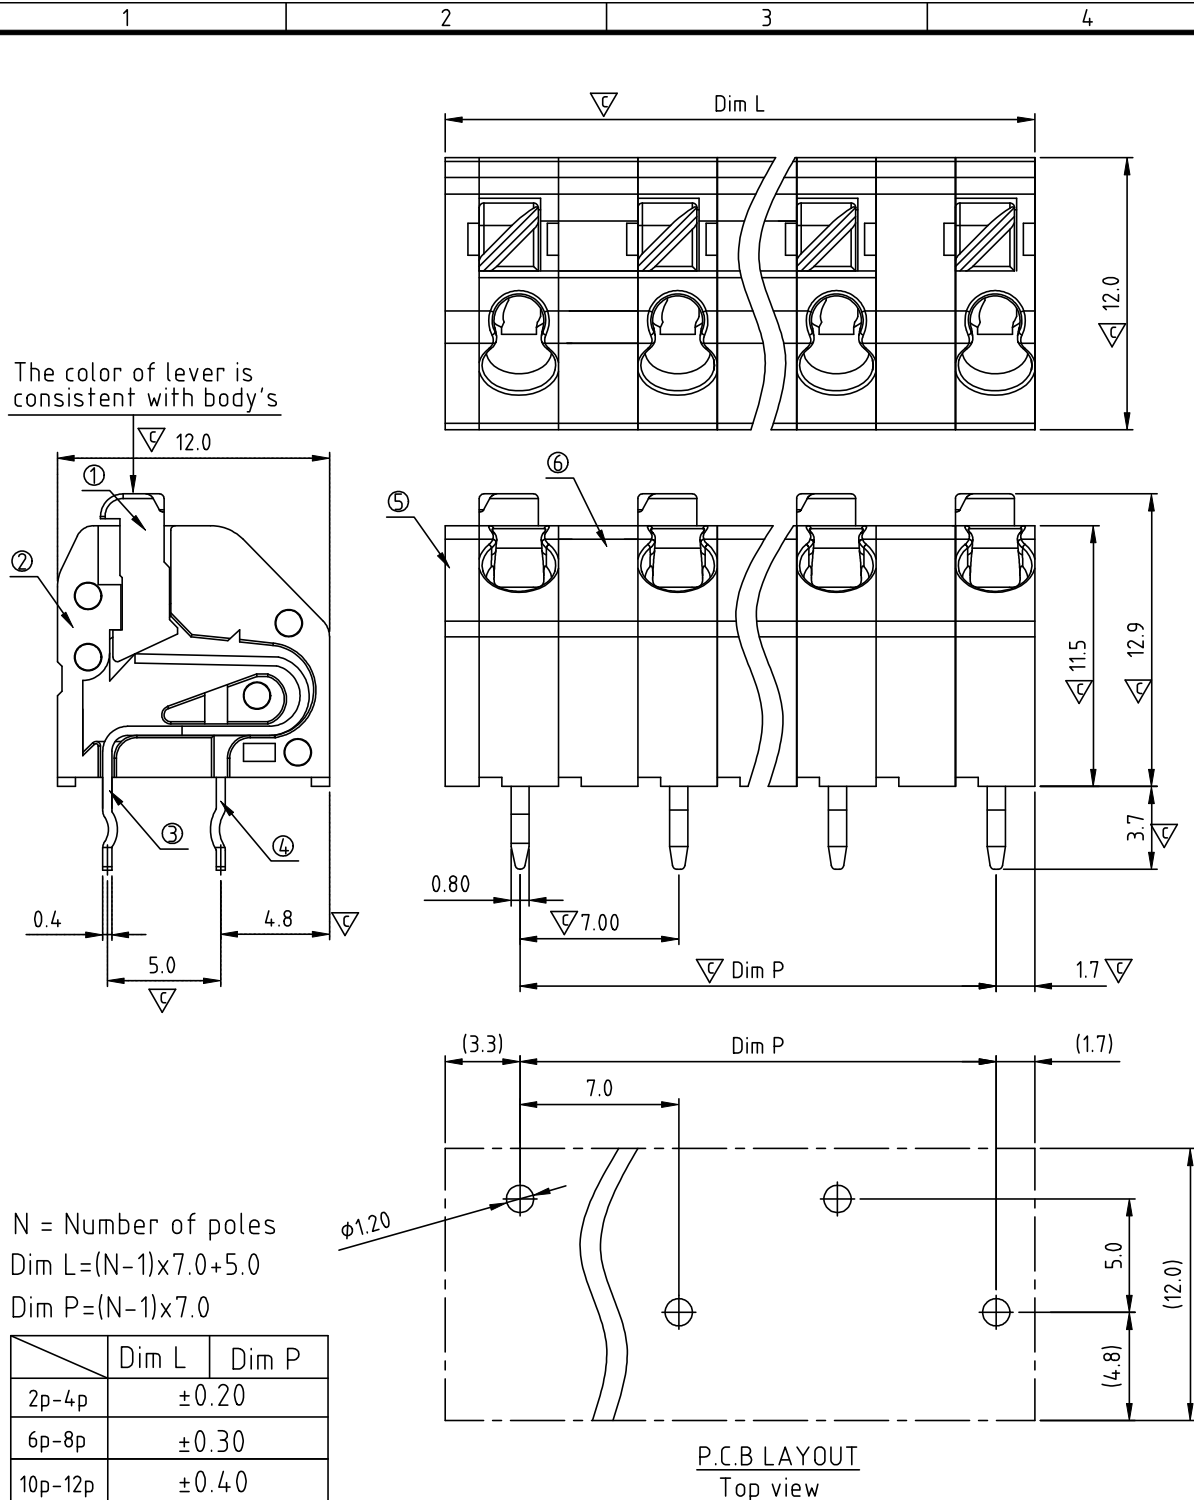

SIGN	DATE	DESCRIPTION	APPROVER
△		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material:

- Item ① Insulator(lever): Thermoplastic (UL94V-0)
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ Side contact pin: PhBz.Tin plated.
- Item ④ Center contact pin: PhBz.Tin plated.
- Item ⑤ Side Cover : Thermoplastic (UL94V-0)
- Item ⑥ Insulator(Board): Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 300V 250V
- Current rating: 6A 6A
- Wire range: 0.5-0.75 mm²
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- Wire strip length: 8.5-10.0mm
- Withstanding Voltage: 1.6KV 2 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C ±5°C/5 Sec
- Safety Approval:  
- Critical dimension: 

RoHS compliant
(lead<4%)
In copper Alloy

HC xx 10 x 3 xxxx G

NO of poles

02 2 poles

04 4 poles

... ..

12 12 poles

Body Color

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7004/P)

9 White(RAL1102)

C Multiple colors

0000 Standard @ Logo


000A Standard ANY Logo

Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HC 7.0mm Series 雙數P			
PART NO.	HCxx10x3xxxxG			DWG NO.	8HC0219
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Da cheng 2013.12.28	Da cheng 2013.12.28		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
SHEET: 01/01		REV.: B			