
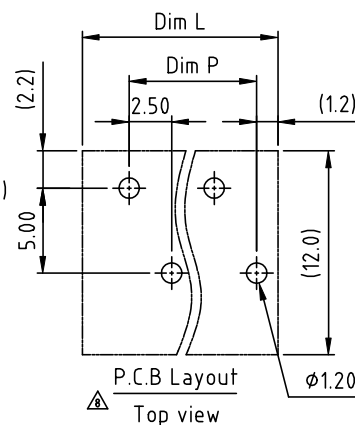

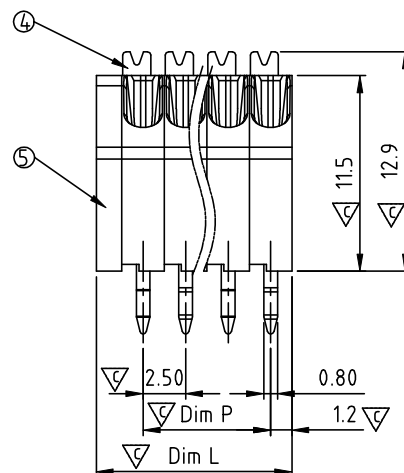


The color of lever is consistent with body's

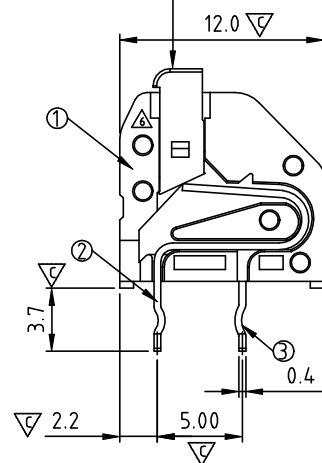

△△ N = Number of poles

Dim L=(N×2.5)+1.5

Dim P=(N-1)×2.5

	Dim L	Dim P
2p-8p	±0.20	
10p-12p	±0.30	
14p-18p	±0.40	
20p-24p	±0.50	

HC xx B 0 x 3 xxxx G

△ NO of poles
02 2 poles
04 4 poles
...
24 24 poles

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

△△ RoHs compliant (lead<4%)
In copper Alloy
0000: "△" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE HC 2.5mm Series (Double row side contact link together with end cover) 雙聯P					DWG NO. 8HC0301	
PART NO.	HCxxB0x3xxxxG				CUST NO.	
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance		
		Da cheng 2013.12.28	Da cheng 2013.12.28	X. ±0.50		
				X.X ±0.30		
				X.XX ±0.10		
				X° ±1°		
SHEET: 01/01				REV.: K		