


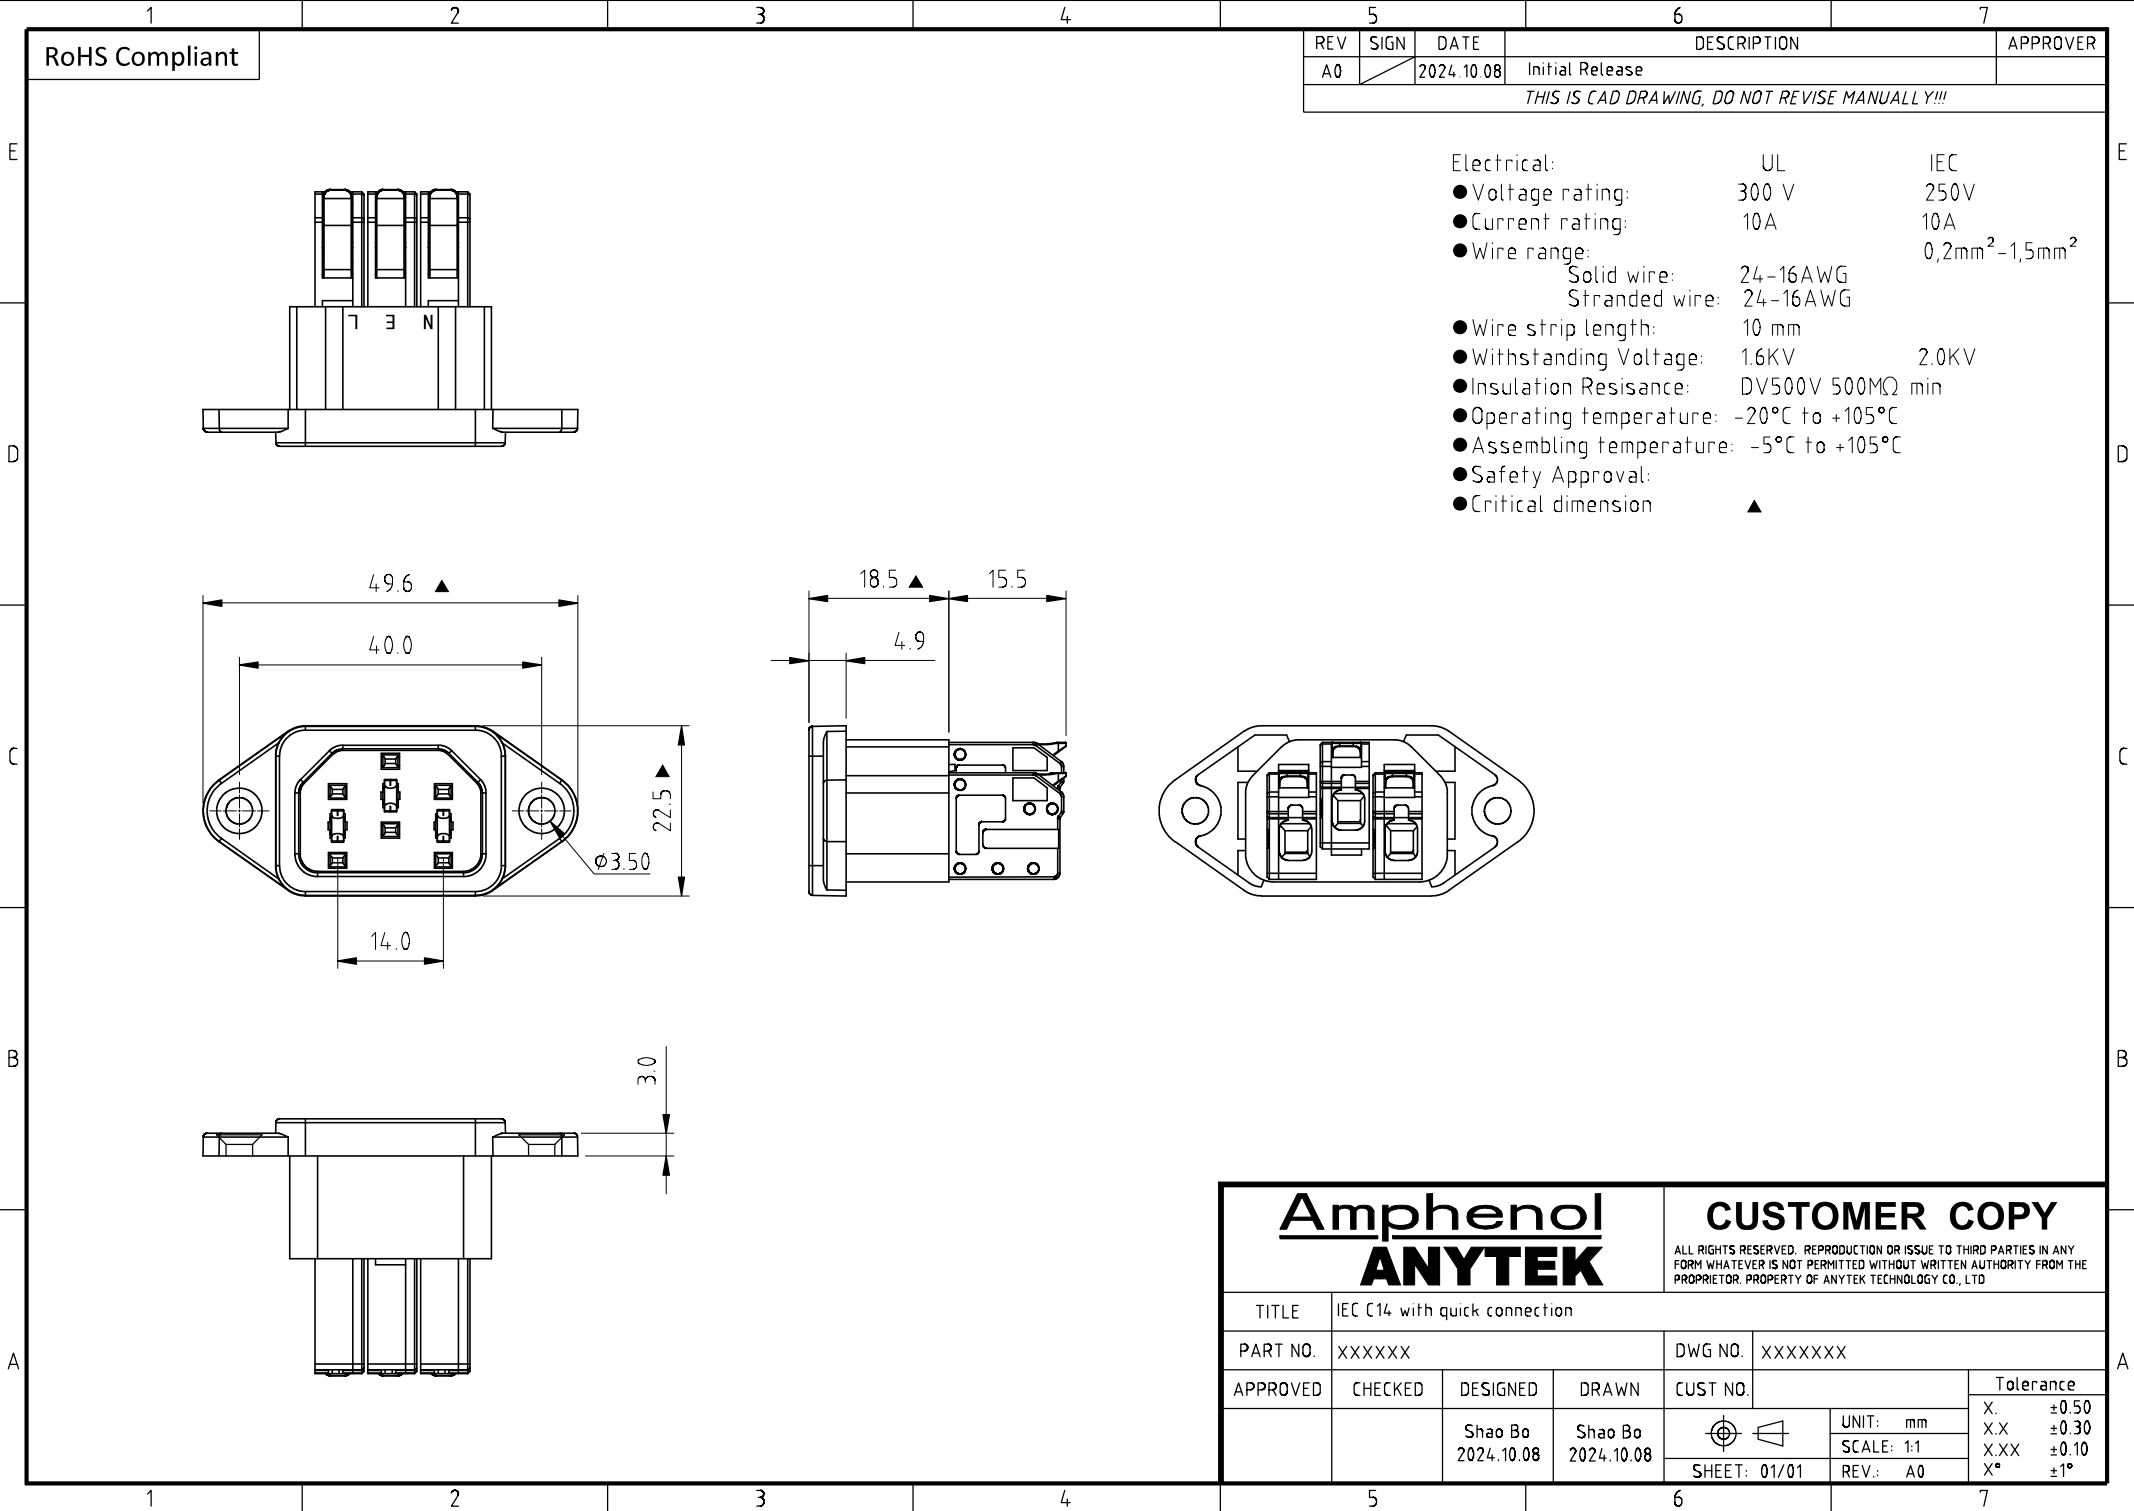

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A0		2024.10.08	Initial Release	
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

- Electrical:
- Voltage rating: 300 V
 - Current rating: 10A
 - Wire range: 24-16AWG
 - Solid wire: 24-16AWG
 - Stranded wire: 24-16AWG
 - Wire strip length: 10 mm
 - Withstanding Voltage: 1.6KV
 - Insulation Resistance: DV500V 500MΩ min
 - Operating temperature: -20°C to +105°C
 - Assembling temperature: -5°C to +105°C
 - Safety Approval:
 - Critical dimension

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		IEC C14 with quick connection					
PART NO.	XXXXXX			DWG NO.	XXXXXXX		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Shao Bo 2024.10.08	Shao Bo 2024.10.08		UNIT: mm		X. ±0.50
					SCALE: 1:1		X.X ±0.30
					SHEET: 01/01		X.XX ±0.10
				REV: A0		X° ±1°	